


Popular Electronics®

WORLD'S LARGEST-SELLING ELECTRONICS MAGAZINE

AUGUST 1979/\$1.25

New, Exciting Low-Cost Projects

- For Joggers: Electronic Pedometer
- For Motorists: Low-Fuel Warning Buzzer
- For Boating: Portable Gas-Leak Meter
- For Basements: Sump Pump Switch/Alarm

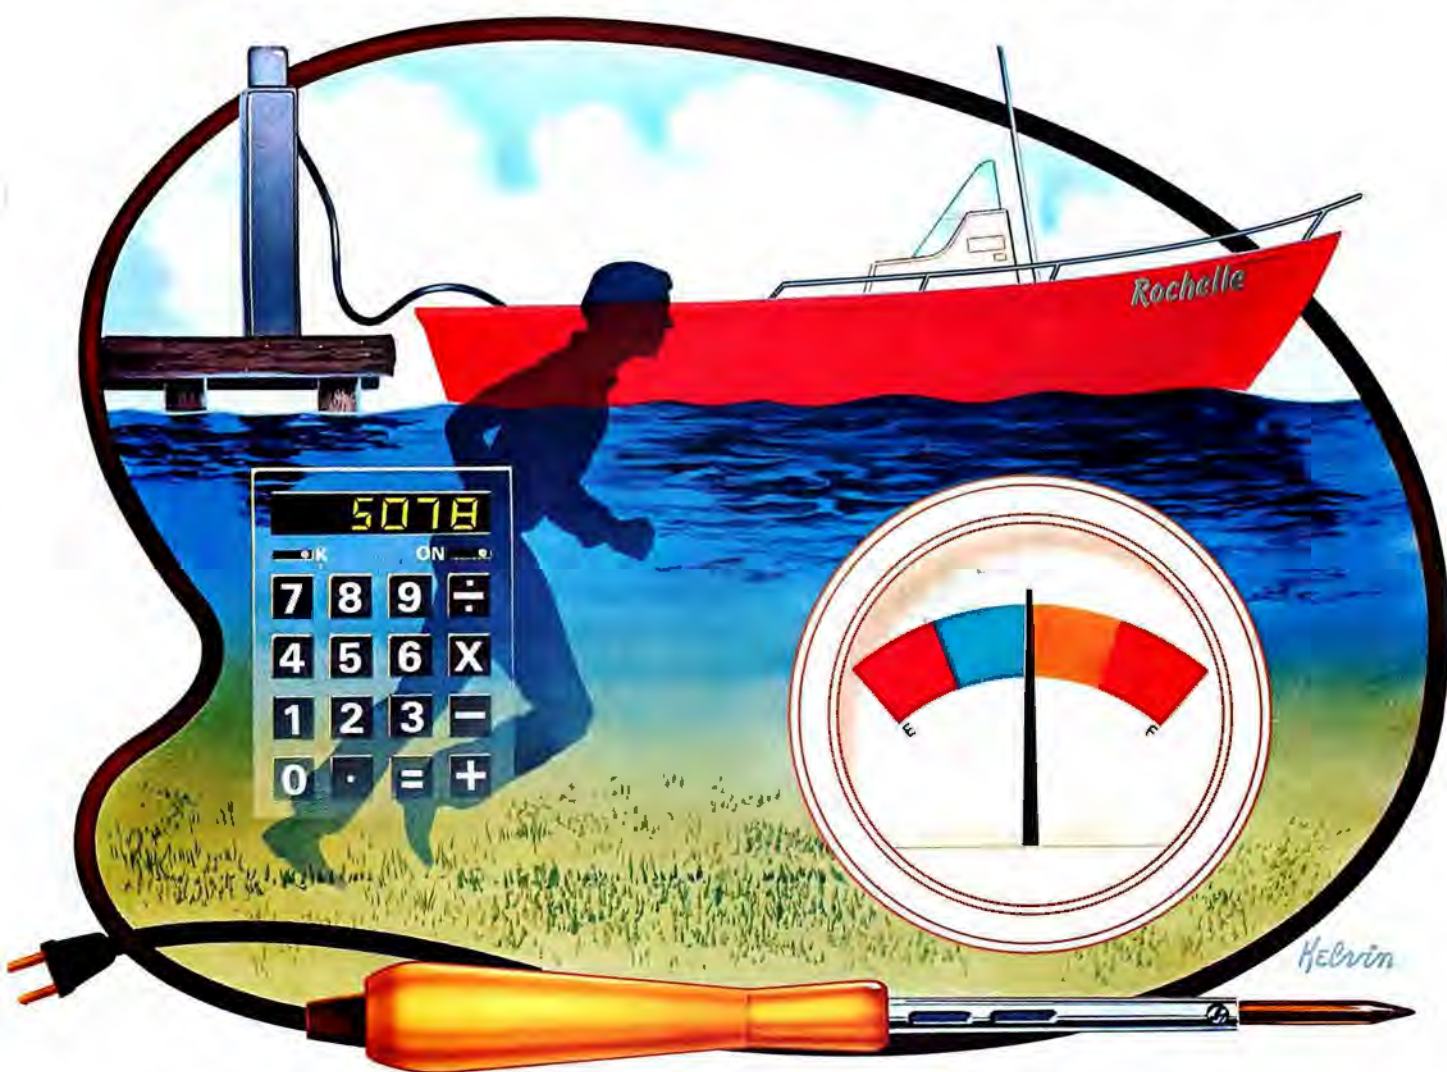

**Tested
In This
Issue**

**Fisher ST460 Speaker System
Shure M95HE Phono Cartridge
CompuColor II Model 4 Personal Computer**



no loose ends

All-In-One: computer, floppy, I/O, 16K RAM. \$1595*



New Heathkit® H89 All-In-One Computer

Heath takes the risk out of selecting a balanced computer system. Now, video terminal, floppy, keyboard and 8-bit computer are brought together in one self-contained, compact unit. Nothing hangs out.

Two Z80's

The personal computer has never been simpler. Or smarter. Two Z80 microprocessors mean terminal never shares power with computer, as do most desk-top units. So this terminal is capable of a multitude of high-speed functions, all controllable by keyboard or software.

102K bytes storage

Built-in floppy disk system gives you fast access to programs and data. Each 5¼-inch diskette has more than 102K bytes of storage area, enough to hold entire files. The All-In-One comes with 16K RAM, expandable to 48K.

Hundreds of uses at home or work

The All-In-One Computer runs programs written in MICROSOFT™ BASIC and ASSEMBLER Languages. And it accepts all current software written for the popular Heathkit H8 computer. You can choose from scores of practical programs for home and business.

Learn by building

What better way to learn about computers than to build one yourself? The All-In-One is available in easy-to-build kit form, as well as completely assembled. Like all Heath electronic kits, it comes to you with its own easy-to-follow assembly manual and a nationwide network of service centers to assure smooth sailing.

FREE CATALOG



For complete details on the Heathkit H89 All-In-One Computer and nearly 400 other electronic kits for your home, work or pleasure, send today for the latest Heathkit Catalog of values.

*\$1195 without floppy. Mail order kit price, F.O.B. Benton Harbor, MI. Also available at Heathkit Electronic Centers at slightly higher prices. Prices subject to change without notice.

Heathkit®

HEATH COMPANY, DEPT. 010-560, BENTON HARBOR, MI 49022

CIRCLE NO. 5 ON FREE INFORMATION CARD



No-Fault Radar

If you've ever been caught by radar or if you own a radar detector, please read this important message.

JS&A has never offered a radar detector.

As our president put it, "A radar detector is a flagrant anti-police device that does nothing but permit abuse of our traffic laws."

Although many devices were presented to JS&A, none were acceptable. Despite all of our efforts, our president stood firm, "Our company will not, under any circumstances, sell radar detectors."

For three years we saw radar detectors—some good, some bad—but because of our president's policy, we were unable to offer a single unit. We saw the units go to both X and K bands; we saw the police develop radar jamming devices; and we saw the FCC prohibit these jamming devices. We followed with great envy as other companies sold thousands of them while JS&A stood firm on its decision not to sell them.

In January of 1979, our president was traveling on an interstate highway at 55 miles per hour. Other cars were passing him.

As he approached the top of a hill, he neglected to pay attention to his speedometer. As he rolled down the hill his speed increased to 63 MPH. At the bottom of the hill was a police radar trap.

He was apprehended and charged with exceeding the speed limit by eight miles per hour. He was taken to a Justice of the Peace who was in the barber shop, so our president had to wait until he finished. Finally there was a quick trial and a fine was paid.

Our president was four hours late. He felt that he was treated like a common criminal despite his good driving record and he lost very valuable time.

ATTITUDE CHANGES

This small incident created an entire change in his attitude. Our president saw for the first time that even law-abiding citizens are subject to the inequities of radar justice. He saw that the law-abiding citizen must also be protected from the abuses of radar power when unfairly used.

And when he studied the entire situation, our president realized something very frightening for all motorists. Many police departments have quotas imposed on them to realize either federal or state funds. They must issue a

certain amount of tickets to qualify. With more and more motorists using radar detectors and CB's, police must strictly enforce speed limits to reach their quotas. Now, even law-abiding motorists, who might make a slight mistake, are more vulnerable to speeding violations.

NEW MEMORANDUM

In a recent memorandum our president stated, "Due to the changing nature of police radar, JS&A may offer radar detectors as part of its program if presented within the quality image of our company and if the product represents a truly unique radar detector product."

With the green light to find a radar detector, our product selection group was prepared. They had brochures from practically every manufacturer in the world. And they eventually selected what even our president thought was the most professional and well-designed unit available.

HIDDEN ANTENNA

Manufactured by a company called Chicago Radar, the unit consists of two parts—one that is hidden behind your grill, and the other under your dash. There's nothing on top of your dash board to indicate that you've got a radar detector and the system is difficult for anybody to steal. The unit under your dash is attached with a self-adhesive Velcro material so there's no screws or installation to worry about.

The control unit has two lights—one to indicate that the unit is on, and the other to indicate that your car is under radar surveillance. There is also an audible alarm that will sound. But at night, when the light is all that you need, you can switch off the audible sound.

The control unit plugs into your cigarette lighter. The radar antenna is placed behind your grill. Just pull into any service station and the mechanic can easily install the entire system. The Velcro material and mounting brackets are all provided.

AMPLIFIED SENSING

The antenna is one of the keys to the unit's high performance. Instead of the square-shaped dish antennas, the Chicago Radar version is a round cylinder. It tends to sense the radar signals sooner and around curves and hills because of its unique design.

The unit responds to both police radar bands X and K and uses all solid-state computer technology in its design.

We urge you to test our selection of what we feel to be the nation's finest radar detector. Order one from JS&A. When you receive it, drive to your nearest service station or CB dealer and have them install your unit. The antenna installs with just a few brackets and the control unit attaches under your dash with the Velcro material.

Then use it for 30 days. During that time, count the number of radar traps you encounter. On the 30th day, turn off your unit as you travel. See how naked and unprotected you feel.

40 DAYS PROOF

If for any reason you are not completely satisfied, just return your unit within our 40-day trial period and we'll gladly send you a prompt and courteous refund.

To order your system, send **\$179.95** plus \$3.00 for postage and handling to the address shown below. (Illinois residents, please add 5% sales tax.) Credit card buyers may call our toll-free number below. By return mail, you'll receive the complete system, all cables, Velcro material, instructions and a 90-day limited warranty.

The patented unit is precision crafted by Chicago Radar—one of the most respected names in radar detection systems. JS&A is America's largest single source of space-age products—further assurance that your modest investment is well protected.

We firmly support our police departments and their efforts, but if they are encouraged to use radar to maintain quotas, the law abiding consumer has no choice but to protect himself. Start today. Order your unit now at no obligation.

JS&A PRODUCTS
THAT THINK®

Dept. PE One JS&A Plaza
Northbrook, Ill. 60062 (312) 564-7000
Call TOLL-FREE 800 323-6400
In Illinois Call (312) 564-7000

©JS&A Group, Inc., 1979

ANNOUNCING AMERICA'S ONLY LAND, SEA AND AIR SCANNER.

Only the incredible, new, no-crystal Bearcat 220 Scanner tunes in all the real excitement of the entire AM aircraft band—plus every FM public service frequency—with pushbutton ease.



Now.

Tune in all the real excitement of the wild blue yonder, at the touch of a button.

The new, no-crystal Bearcat 220 Scanner searches and tunes in the entire aircraft band. Jets at 30,000 feet. All the tense tower talk. Everything is pre-programmed in space-age memory banks.

Only the 7-band Bearcat 220 Scanner also brings home every public service frequency, too. Pre-programmed Marine frequencies. Police action. Fire calls. Weather warnings. You name it.

The new Bearcat 220 has all the features and quality Bearcat Scanners are famous for. Track tuning. Decimal display readout. Automatic Search. Selective Scan Display. Automatic squelch and lockout. Priority. And much, much more.

After all, Bearcat invented Scanning. And we'll stop at nothing to bring you all the excitement—of land, sea, and air.

BEARCAT® 220 SCANNER


Follow the leader to real excitement.



Copyright 1979 Electra Company • Division of Masco Corp. of Indiana • 300 East County Line Road, Cumberland, Indiana 46229

CIRCLE NO. 20 ON FREE INFORMATION CARD

POPULAR ELECTRONICS

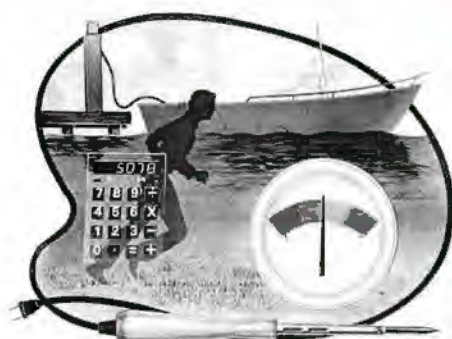

About the cover:

A soldering iron and a few inexpensive parts can be used to make some especially useful devices to add safety and convenience to your lives.

Cover Art by George Kelvin

JOSEPH E. MESICS
Publisher

ARTHUR P. SALSBERG
Editorial Director

LESLIE SOLOMON
Technical Director

JOHN J. McVEIGH
Technical Editor

JOHN R. RIGGS
Managing Editor

HAROLD A. RODGERS
Senior Editor

ALEXANDER W. BURAWA
Features Editor

EDWARD I. BUXBAUM
Art Director

ANDRE DUZANT
Technical Illustrator

CARMEN VELAZQUEZ
Production Editor

Contributing Editors
Hal Chamberlin, Lou Garner, Glenn Hauser
Julian Hirsch, Ralph Hodges, Forrest Mims

JEFF NEWMAN
Assistant to the Editor

LINDA BLUM
Advertising Service Manager

MARIE MAESTRI
Executive Assistant

EDGAR W. HOPPER
Publishing Director

Feature Articles

- SCANNER BEAM PINPOINTS THE ACTION!** / Robert Grove _____ 44
Make-it-yourself antenna for improved reception of public service bands.
- SIMPLE TRS-80 PROGRAMS SOLVE ELECTRONICS CALCULATIONS** / Roy Babylon _____ 47
BASIC program for Ohm's law, resonance and inductive formulas.
- THE ART OF EQUALIZATION** / Ethan Winer _____ 49
An expert tells how to achieve that special recorded "sound."

Construction Articles

- FOUR LOW-COST PROJECTS FOR YOUR FAMILY'S CONVENIENCE & SAFETY**
- SOLID-STATE LEVEL-SENSING SWITCH FOR SUMP PUMPS** / Philip Windolph _____ 31
- VEHICLE LOW-FUEL INDICATOR** / Bradley Albing _____ 34
- PORTABLE GAS LEAK METER** / Cass Lewart _____ 41
- ELECTRONIC PEDOMETER FOR JOGGERS** / Andrew A. Modla _____ 42
- BUILD A SPEAKER PROTECTION CIRCUIT** / Mike Rogalski _____ 54
- SPACE-AGE ELECTRONIC PROJECTS FOR BOATS, Part 2** / Harold Wright _____ 55
How to build bilge alarms, a tachometer, and protection circuits.

Columns

- STEREO SCENE** / Ralph Hodges _____ 20
Recording as Nature Intended.
- EXPERIMENTER'S CORNER** / Forrest M. Mims _____ 60
IC Interval Timers.
- HOBBY SCENE** / John J. McVeigh _____ 66
- DX LISTENING** / Glenn Hauser _____ 70
WARC-79
- SOFTWARE SOURCES** / Leslie Solomon _____ 73
- COMPUTER BITS** / Leslie Solomon _____ 74
Windows in the CRT.
- PROJECT OF THE MONTH** / Forrest M. Mims _____ 78
A "Matchbox" LED Oscilloscope.

Julian Hirsch Audio Reports

- FISHER MODEL ST460 SPEAKER SYSTEM** _____ 23
- SHURE M95HE STEREO PHONO CARTRIDGE** _____ 24
- LECTROTECH MODEL PPI-400** _____ 25

Electronic Product Test Report

- COMPUCOLOR II MODEL 4 PERSONAL COMPUTER SYSTEM** _____ 67

Departments

- EDITORIAL** / Art Salsberg _____ 4
The TV Piggybacking Furor.
- LETTERS** _____ 6
- NEW PRODUCTS** _____ 8
- NEW LITERATURE** _____ 15
- OPERATION ASSIST** _____ 94
- ADVERTISERS INDEX** _____ 97
- PERSONAL ELECTRONICS NEWS** _____ 98

POPULAR ELECTRONICS (ISSN 0032-4485): Published monthly by Ziff-Davis Publishing Company, at One Park Avenue, New York, NY 10016. Philip B. Korsant, President; Selwyn Taubman, Treasurer; Philip Sine, Secretary. One year subscription, U.S. and Possessions, \$13.00; Canada, \$16.00; all other countries, \$18.00, cash orders only, payable in U.S. currency. COPYRIGHT © BY ZIFF-DAVIS PUBLISHING COMPANY. ALL RIGHTS RESERVED.

ZIFF-DAVIS PUBLISHING COMPANY
Editorial and Executive Offices
One Park Avenue, New York, New York 10016
212-725-3500
Joseph E. Mesics (725-3568)
John J. Corton (725-3578)
Bernie B. Kaiser (725-3580)

Midwestern Office
Suite 1400, 180 N. Michigan Ave.
Chicago, IL 60601 (312-346-2600)

Western Office
9025 Wilshire Boulevard, Beverly Hills, CA 90211
213-273-8050

Western Representative: Norm Schindler
7050 Owensmouth Ave., #209
Canoga Park, CA 91303 (213-999-1414)

Japan: James Yagi, Qji Palace Aoyama,
6-25, Minami Aoyama, 6 Chome, Minato-Ku,
Tokyo 407-1930/6821, 582-2851

ZIFF-DAVIS PUBLISHING COMPANY
Philip B. Korsant, President
Furman Hebb, Executive Vice President
Philip T. Heffernan, Sr. Vice President
Edward D. Muhlfeld, Sr. Vice President
Philip Sime, Sr. Vice President, Secretary
Lawrence Sporn, Sr. Vice President, Circulation and Marketing
Barro Davis, Vice President, Production
George Morrissey, Vice President
Sydney H. Rogers, Vice President
Sidney Holtz, Vice President
Albert S. Traim, Vice President
Paul H. Chock, Vice President
Edgar W. Hopper, Vice President
Robert N. Bavier, Jr. Vice President
Selwyn Taubman, Treasurer

W. Bradford Briggs, Vice Chairman

ZIFF CORPORATION
William Ziff, Chairman
I. Martin Pompadour, President
Herbert B. Sarbin, Executive Vice President

POPULAR ELECTRONICS, August 1979, Volume 16 Number 2. Published monthly at One Park Avenue, New York, NY 10016. One year subscription rate for U.S. and Possessions, \$13.00. Canada, \$16.00, all other countries, \$18.00 (cash orders only, payable in U.S. currency). Second Class postage paid at New York, NY and at additional mailing offices. Authorized as second class mail by the Post Office Department, Ottawa, Canada, and for payment of postage in cash.

POPULAR ELECTRONICS including ELECTRONICS WORLD, Trade Mark Registered. Indexed in the Reader's Guide to Periodical Literature.

COPYRIGHT © 1979 BY ZIFF-DAVIS PUBLISHING COMPANY. ALL RIGHTS RESERVED.

Ziff-Davis also publishes Boating, Car and Driver, Cycle, Flying, Popular Photography, Skiing, Stereo Review, Electronic Experimenter's Handbook, Tape Recording & Buying Guide, Stereo Directory & Buying Guide, and Communications Handbook.

Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to Jerry Schneider, Rights and Permissions, Ziff-Davis Publishing Co., One Park Ave., New York, NY 10016.

Editorial correspondence: POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. Editorial contributions must be accompanied by return postage and will be handled with reasonable care; however, publisher assumes no responsibility for return or safety of manuscripts, art work, or models.

Forms 3579 and all subscription correspondence: POPULAR ELECTRONICS, Circulation Dept., P.O. Box 2774, Boulder, CO 80302. Please allow at least eight weeks for change of address. Include your old address, enclosing, if possible, an address label from a recent issue.

The publisher has no knowledge of any proprietary rights which will be violated by the making or using of any items disclosed in this issue.



Editorial

THE TV PIGGYBACKING FUROR

In what appears to be a David vs. Goliath contest, Texas Instruments, with inspirational support from RCA, is attempting to have rules on Class I devices for TV amended to include a Class II category. This would permit legal sale of stand-alone r-f modulators to be used for computers and peripherals. Such a change in the present interface rule that requires r-f modulators to be FCC type approved together with signal-source equipment is vociferously opposed by Radio Shack, Apple, Commodore, and Interact, among personal computer makers.

TI says, essentially, that it's unfair to make a buyer purchase a video monitor when he could just as easily use an existing TV receiver if only the FCC would OK the use of separate r-f modulators. Other computer makers, who are already marketing personal computers, cry "foul," saying, in a nutshell, that such approval would give TI an unfair marketing advantage. Moreover, they point out that this would also cause increased interference with radio and TV reception.

TI also requested a temporary permit to go ahead with the separate r-f modulator concept while the FCC's bureaucratic wheels turn ever so slowly to reply to the company's initial request for changing the rules. (Note: the FCC has yet to act on a similar request by RCA made about two years ago.) The National Association of Broadcasters (NAB) observes that this second request amounts to trying to solve a private marketplace problem by changing the rules.

With the foregoing as background, let's examine the pro's and con's of the rules change proposal. [I'll ignore the waiver request entirely because (1) it indeed gives a company not yet in the field an unfair advantage and (2) since the Part 15 radiation standards are under active review, it's possible that the "temporary" r-f modulators will not be in line with new standards.]

From a typical consumer's viewpoint, using a separate modulator to connect a computer to one's own TV receiver would likely appear to be an ideal opportunity to save substantial monies. Given the fact that computers are great noise generators, however, it is possible that interference within the household and on nearby neighbors' receivers would be objectionable. Furthermore, using a home TV receiver as information display equipment results in lowered video quality under the best of circumstances when compared to video monitors.

Nevertheless, the possibility of employing a legalized separate r-f modulator is an appealing one, and should be pursued. I firmly believe, though, that the FCC should not rush into making a positive decision on this without setting signal radiation standards that we can live with in the future. On the other hand, it's unfair to penalize manufacturers by the foot-dragging procedures practiced by the FCC.

RCA, by the way, has pointed out that the TI request for an r-f modulator physically separated from computers is not the same as its petition for a rules change that relates to all-in-one-package video disk and tape machines. So the company suggests three classifications: the present Class I TV devices that require type approval, a second classification for built-in r-f modulators, and a third for stand-alone modulators. (How come RCA and other TV makers don't incorporate video jacks in their TV receivers, which would make these rules change requests moot?)

Since this is written in May, I hopefully will learn more about all this at the Consumer Electronics Show in Chicago in June.

Art Salsberg



Member Audit Bureau
of Circulations

Don't take our word for it.

"We can heartily recommend the Superboard II computer system for the beginner who wants to get into microcomputers with a minimum of cost. Moreover, this is a 'real' computer with full expandability."

Popular Electronics March, 1979

"(Their) new Challenger 1P weighs in at \$279 and provides a remarkable amount of computing for this incredible price."

Kilobaud Microcomputing February, 1979

"Over the past four years we have taken delivery on over 25 computer systems. Only two have worked totally glitch free and without adjustment as they came out of the carton: The Tektronic 4051 (at \$7,000 the most expensive computer we tested) and the Ohio Scientific Superboard II (at \$279 the least expensive) . . . The Superboard II and companion C1P deserve your serious consideration."

Creative Computing January, 1979

"The Superboard II and its fully dressed companion the Challenger 1P series incorporate all the fundamental necessities of a personal computer at a very attractive price. With the expansion capabilities provided, this series becomes a very formidable competitor in the home computer area."


Interface Age April, 1979

"The graphics available permit some really dramatic effects and are relatively simple to program . . . The fact that the system can be easily expanded to include a floppy means that while you are starting out with a low-cost minimal system, you don't have to throw it away when you are ready to go on to more complex computer functions. Everything is there that you need; you simply build on to what you already have. You don't have to worry about trading off existing equipment to get the system that will really do what you want it to do. At \$279, Superboard II is a tough act to follow."

Radio Electronics June, 1979

"The Superboard II is an excellent choice for the personal computer enthusiast on a budget."

Byte May, 1979

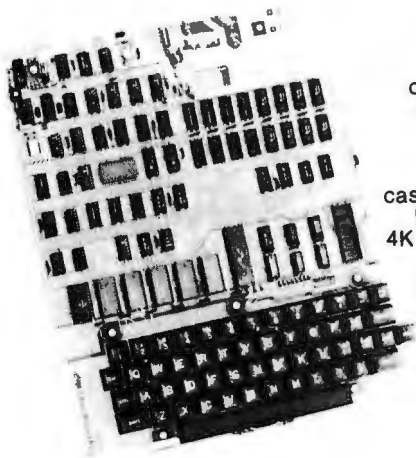

SUPERBOARD II **\$279.00**

The world's first complete computer system on a board including full keyboard, video display, audio cassette interface, 8K BASIC-in-ROM and 4K RAM. Expandable. Requires +5V at 3 amp power supply.



C1P \$349.00

Complete with enclosure and power supply. All features of Superboard II. Easy to expand to more memory and floppy disk.

C1P MF \$995.00

The first floppy disk based computer system the world has ever seen for under \$1,000. 8K BASIC-in-ROM, 12K RAM. Expandable to 32K RAM.



OHIO SCIENTIFIC

1333 S. CHILLICOTHE RD., AURORA, OHIO 44202 (216) 562-3101

See your Ohio Scientific dealer for full details.

CIRCLE NO. 41 ON FREE INFORMATION CARD

McIntosh

"A Technological Masterpiece..."



McIntosh C 32

"More Than a Preamplifier"

McIntosh has received peerless acclaim from prominent product testing laboratories and outstanding international recognition! You can learn why the "more than a preamplifier" C 32 has been selected for these unique honors.

Send us your name and address and we'll send you the complete product reviews and data on all McIntosh products, copies of the international awards, and a North American FM directory. You will understand why McIntosh product research and development always has the appearance and technological look to the future.

Keep up to date.
Send now - - -

McIntosh Laboratory Inc.
Box 96 East Side Station
Binghamton, NY 13904

Name _____

Address _____

City _____ State _____ Zip _____

If you are in a hurry for your catalog please send the coupon to McIntosh. For non-rush service send the Reader Service Card to the magazine.

CIRCLE NO. 35 ON FREE INFORMATION CARD




SOLENOID THAT ISN'T

We at Eumig thank POPULAR ELECTRONICS for the fine review regarding our Metropolitan CCD cassette deck in the May 1979 issue. We did, however, note an error regarding the deck's transport in the "User Comment" section: "The solenoid-operated transport is astonishingly silent. We heard none of the thumps or clunks usually associated with solenoid operation." You then go on to state that there is a "motor" sound instead of a solenoid sound.

As a point of information, the reason solenoids are not heard is that there are no solenoids. The motor sound is heard because the head mounting assembly is step-motor engaged, using the same motor that governs fast forward and rewind. —Tom Benssen, Eumig (U.S.A.) Inc., Great Neck, NY

MAKING A BETTER WINDOW?

The window comparator circuit shown above has fewer parts and has better input protection than that shown in Fig. 5 of the May

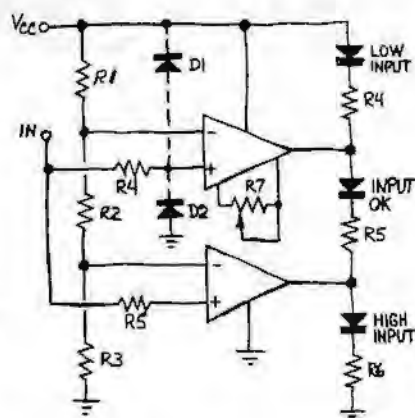

1979 "Experimenter's Corner." Resistors R1, R2, and R3 form the reference voltage source with the upper limit defined by $V_{CC}/(R2 + R3)/(R1 + R2 + R3)$ and the lower limit defined by $V_{CC}R3/(R1 + R2 + R3)$. For small windows, R2 determines the window opening. For very small windows, on the order of 0 to 15 mV, R2 can be eliminated and the opening can be adjusted via R7. Resistors R4 and R5 protect the inputs from excessive current during accidental inputs exceeding V_{CC} or ground. Diode limiting can be added from the inputs to V_{CC} and ground, using D1 and D2.

System stability is a function of V_{CC} stability and op-amp drifts. For 741s and 747s, V_{CC} should be between 8 and 30 volts. FET-input op-amps lend themselves well to this application. Resistors R4, R5, and R6 limit LED current and should be chosen to allow about 10 mA. —Glenn Fasnacht, Lakewood, OH.


MOPED TURN INDICATORS

Many thanks for "Solid-State Turn Indicators for Mopeds" (May 1979). The article was clearly written. The project will almost certainly prevent accidents because blinking lights are easier to see and interpret. Also, the project is small enough to easily mount on all mopeds. —Bill Saehler, Minnesota City, MN.

While looking over the moped turn-indicator article, I noticed that D4 and C3 are not switched out of the power circuit by S1. While this is not particularly important when the de-

vice is connected to a moped generator, if a battery is used, as suggested in the article, it would quickly discharge to the zener voltage. To obviate this, I would rewire the circuit as shown below.

Note, too, that by substituting a dpdt (center-pf) switch for S1 several advantages arise. Diodes D3 and D4 are eliminated, light assemblies do not have to be insulated from the frame, and return wiring from the lamps to the switch is not required. —Roy F. Gordon, Hampton, VA.

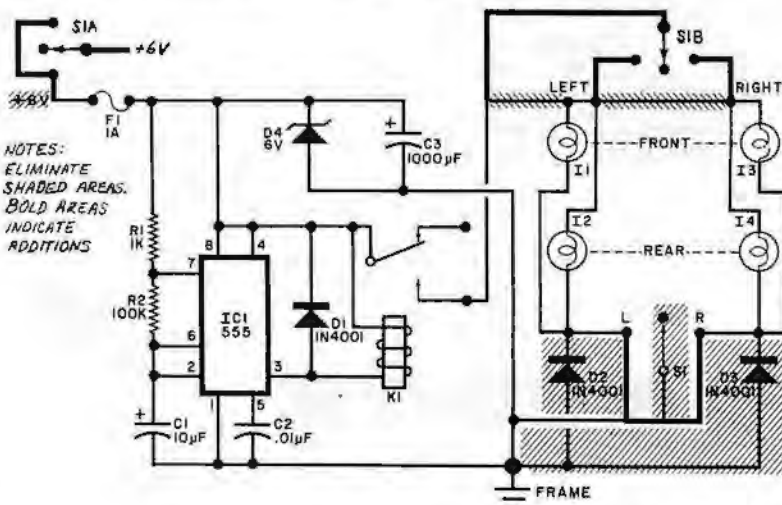

NOTES:
ELIMINATE
SHADED AREAS.
BOLD AREAS
INDICATE
ADDITIONS

Introducing the Troubleshooter.

Six functions and 24 ranges for \$129* make the jump from Analog to Digital more affordable than ever.

We call our new hand-held 8022A DMM the Troubleshooter. It combines the basic performance features you want with all the advantages that give digital DMM's the edge over analog—0.25% basic dc accuracy, a rugged, reliable design, a razor sharp 3½-digit LCD readout, small size and light weight.

Measure for measure you won't find a better value. Six functions—high and low ohms, ac and dc voltage and current (24 ranges in all) make the Troubleshooter a 13 ounce (0.37 kg) package of excellent measurement value. This kind of value wasn't possible until our custom CMOS LSI single chip design made hand-held DMM's an affordable reality and Fluke the industry leader.

Here's something new that won't shock you. Fluke's exclusive probe design features finger guards on the probe and shrouded connections to discourage accidental contact with circuit voltages.

You won't find a more rugged or reliable hand-held DMM. There's a lot more to building a high-quality hand-held DMM than you might suspect. The case has to survive bumps, scrapes, and scuffs. The LCD readout must withstand the extremes of humid-

ity, temperature, and vibration. Function switches need to perform reliably through thousands of cycles. And electrical circuitry must survive both physical shock and electrical overloads.

We built the 8022A to withstand all these tortures—with a rugged impact resistant plastic case, a custom LCD display, reliable push-buttons instead of rotary switches and over 20% of the components devoted to overload protection.

Take the next step. Contact the Fluke office, representative or authorized distributor in your area. In the U.S., CALL TOLL FREE (800) 426-0361. (For resi-

dents in Alaska, Hawaii, and Washington, the number is (206) 774-2481.)

In Europe, contact: Fluke (Nederland) B.V., P.O. Box 5053, Tilburg, The Netherlands. Telephone (013) 673973. Telex 52237.

Ask about the new 8022A. And while you're at it, check into the 8020A Analyst, the improved version of our \$169* DMM. It boasts Fluke's exclusive conductance capability for high resistance measurements and 0.1% measurement accuracy.

Both instruments are available at your distributor from stock. For immediate response, fill out the attached coupon.



FLUKE

CIRCLE NO. 21 ON FREE INFORMATION CARD

John Fluke Mfg. Co., Inc.
P.O. Box 43210
Mountlake Terrace, WA 98043

- ☐ Please send 8022A Troubleshooter data.
- ☐ Please send the 8020A Analyst specs.
- ☐ Please have a salesman call.

Name _____
Title _____ Mail Stop _____
Company _____
Address _____
City _____ State _____ Zip _____
Telephone () _____ Ext. _____

PE 8/79

*U.S. Price Only

NEW MARK III 9 Steps & Colors LED VU



Stereo level indicator kit with arc-shape display panel!! This Mark III LED level indicator is a new design PC board with an arc-shape 4 colors LED display (change color from red, yellow, green and the peak output indicated by rose red). The power range is very large, from -30dB to +5dB. The Mark III indicator is applicable to 1 watt - 200 watts amplifier operating voltage is 3V - 9V DC at max 400 MA. The circuit uses 10 LEDs per channel. It is very easy to connect to the amplifier. Just hook up with the speaker output!

IN KIT FORM \$18.50

60W + 60W STEREO AMPLIFIER



COMPLETED UNIT—NOT A KIT!

OCL pre amp. & power stereo amp. with bass, middle, treble 3-way tone control. Fully assembled and tested, ready to work. Total harmonic distortion less than 0.5% at full power. Output maximum is 60 watts per channel at 8Ω. Power supply is 24 - 36V AC or DC. Complete unit

Assembled \$49.50 ea.

Power transformer \$ 8.50 ea.

5W AUDIO AMP KIT

2 LM 386 with Volume Control
Power Supply 6 ~ 18V DC

ONLY \$6.00 EACH

100W CLASS A POWER AMP KIT

Dynamic Bias Class "A" circuit design makes this unit unique in its class. Crystal clear, 100 watts power output will satisfy the most picky fans. A perfect combination with the TA-1020 low T.J.M. stereo pre-amp. Specifications: *Output power: 100W RMS into 8-ohm/125W RMS into 4-ohm *Frequency response: 10Hz-100KHz *T.H.D.: less than 0.008% *S/N ratio: better than 80dB *Input sensitivity: 1V max.

*Power supply:
+40V @ 5 amp.
TA-1000 KIT
\$51.95

Power transformer
\$15.00 each



LOW TIM DC STEREO PRE-AMP KIT TA-10-20

Incorporates brand-new D.C. design that gives a frequency response from 0Hz-100KHz ±0.5dB! Added features like tone defeat and loudness control let you tailor your own frequency response. Independent I.C. regulated power supplies to eliminate power fluctuation! Specifications: *THD less than 0.05% *T.I.M. less than 0.05% *Frequency response: DC to 100KHz ±0.5dB *R.I.A. deviation: ±0.2dB *S/N ratio: better than 70dB *Sensitivity: Phono 2MV 47K/Aux. 100mV 100K *Output level: 1.3V *Max output: 15V *Tone control: bass +10dB @ 50Hz/treble +10dB @ 15Hz *Power supply: ±24 D.C. @ 0.5A

KIT comes with regulated power supply, all you need is a 48V C.T. transformer @ 0.5A

ONLY \$44.50
X'former \$4.50



WE SELL ALL KINDS OF ELECTRONIC PARTS & KITS

PLEASE SEND \$2.00
FOR DETAIL CATALOGUE

YOU MAY FIND OUR 2-PAGE AD
IN EVERY ISSUE OF
RADIO ELECTRONICS

RETAIL STORE OPEN TO PUBLIC
MONDAY THRU SATURDAY
10 a.m. - 7 p.m.

FORMULA INTERNATIONAL INC.
12503 CRENSHAW BOULEVARD
HAWTHORNE, CA 90250
(213) 679-5162 or (213) 973-1921

All items subject to prior sale.
Prices subject to change without notice.

CIRCLE NO. 23 ON FREE INFORMATION CARD



New Products

Additional information on new products covered in this section is available from the manufacturers. Either circle the item's code number on the Free Information Card or write to the manufacturer at the address given.

KEF Model 101 Loudspeaker

The Model 101 loudspeaker by KEF Electronics has a total volume of only 0.25 cu. ft. and is designed for bookshelf placement. A computer is used to match the two



drivers—a 25-mm (1") tweeter and a 110-mm (4 1/4") woofer—and the crossover network as well. The speaker is rated to accept the output of an amplifier up to 100 watts and has an automatic protection system to prevent overdriving. Maximum output level is said to be 98 dB SPL. Sold in matched pairs with teak or walnut finish and a brown fabric grille.

CIRCLE NO. 88 ON FREE INFORMATION CARD

Low-Cost μC Printer

Radio Shack has introduced an inexpensive printer that produces low-cost hard copy on 2 3/4" (60.3-cm) wide aluminum-coated paper. The TRS-80 Quick Printer II



prints upper- and lower-case, double-size, and double-spaced characters to allow special effects such as tiling pages and printing headings. Automatic "wrap-around" prevents data loss due to overflow when text exceeds maximum line length. Printer software is selectable for 16 or 32 characters/line and produces 120 lines/minute (64 characters/second). The 96-character, 5 × 7 dot-matrix characters are a modified ASCII subset. Vertical spacing is 6 lines/inch. All 32 ASCII codes can be produced, as well as codes for the printed characters. Although designed for use with Radio Shack's Level II TRS-80 systems, the printer can also be used with other computers. Measures 9 1/4"W × 6 3/4"D × 3 5/16"H. \$219.00.

CIRCLE NO. 89 ON FREE INFORMATION CARD

Digital Capacitance Meter

A new digital capacitance meter has been introduced by Data Precision Corp. The 3 1/2-digit Model 93B has a rated measuring range of 0.1 pF to 1999 μF in eight switchable ranges, with a basic accuracy of 0.1%. Range selection is via pushbutton switches handily located along the left side of the case. A zero-adjust control with a ±20 pF range is provided for compensat-



ing for stray capacitance of test leads. Measurements appear on a 0.5" (12.7-mm) high liquid crystal display. An internal fuse prevents instrument damage from charged capacitors and should the test leads be inadvertently connected across a voltage source. Uses a single 9-volt alkaline battery. \$149.00

CIRCLE NO. 91 ON FREE INFORMATION CARD

AM/SSB Mobile CB Transceiver

The Model 7001 is the most precise AM/SSB CB mobile transceiver in Midland's Precision Series. It features: RF Attenuator switch; RF GAIN, CLARIFIER, SQUELCH, and MIC GAIN controls; LED transmit/receive (TX/RX) indicator; DIM, CB/PA, LSB/AM/USB mode selector, NB & ANL, and TONE switches. A two-digit, green seven-

(Continued on page 12)

PULSEMAKER

It's a digital signal injector. And it thinks for itself.

It may look like a logic probe... but our DP-1 Digital Pulser is a lot more unique. This handheld, circuit-powered instrument is actually a miniature pulse generator built to speed digital troubleshooting.


Touch it to a circuit, and DP-1 automatically senses the logic state. So when you push the button, out comes one perfect pulse—preset to the logic family you're working with—of the proper polarity to force the state the other way. Hold the button down for a second and it starts injecting a 100pps pulse train. With all the punch you need—up to 100 mA.

Think what a help that can be when your logic circuit is doing something illogical. (And just in case you do something illogical, we've included reverse-polarity and short-circuit protection, as well.)

It's smart to save time with a DP-1. At \$74.95*, it's a smart buy, too.

Smarter tools for testing and design.

CONTINENTAL SPECIALTIES CORPORATION



70 Fulton Terrace, New Haven, CT 06509 (203) 624-3103, TWX 710-465-1227
OTHER OFFICES: San Francisco: (415) 421-8872, TWX 910-372-7992
Europe: CSC UK LTD. Phone Saffron-Walden 0799-21682, TLX 817477
Canada: Len Finkler Ltd., Ontario

Call toll-free for details **1-800-243-6077**

*Suggested U.S. resale. Available at selected local distributors.

Prices, specifications subject to change without notice.

© 1979 Continental Specialties Corporation

CIRCLE NO. 13 ON FREE INFORMATION CARD



The craftsmen at Realtime™ have done something quite unusual. They've created a dramatically thin, rugged alarm chronograph for under \$250.

In fact, way under \$250.

And while they've trimmed their timepiece's profile to a slim 9mm, they have done it without sacrificing a single feature, or compromising quality.

We have yet to see an alarm chronograph that even approaches the value of this superb new product, either in a store or offered through the mail.

Microcomputer technology pushed to the limit.

It's truly remarkable the amount of information you can now carry on your wrist, especially when you consider it's within a piece of jewelry no bulkier than an ordinary, slim wristwatch.

With this chronograph, you have bright liquid crystal digits always telling you the time of day. In hours, minutes and seconds (with accuracy to ± 5 seconds a month).

What's more, you can even program the hours, minutes and seconds for any other time zone you wish for immediate recall, thanks to Realtime's dual time-zone feature.


5 POPULAR ALARM CHRONOGRAPHS COMPARE THINNESS.

Texas Instruments (\$125) 12.00 mm
Advance (\$100) 11.5 mm
Citizen (\$225) 11.0 mm
Seiko (\$250) 10.5 mm
Realtime (\$99) 9.0 mm

It's a multitasking wrist alarm too. You may set it to beep-beep you in both time zones, and at precisely the minute you choose.

And because of Realtime's "PM" indicator, you won't be setting your alarm for the evening when you had intended to set it for the morning.

Is it Monday in New York? Or Tuesday in Hong Kong? You'll never have to ask that question

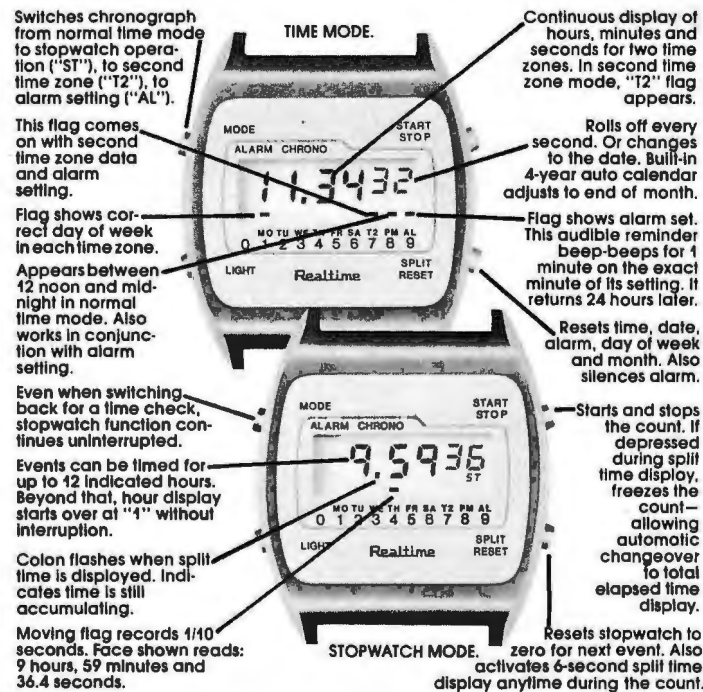

again. The day of the week is always displayed. To see the date, simply flick a button. When the sun's down, press another and the Realtime's face is instantly illuminated.

FINALLY. AN ALARM ALL FUNCTIONS


And just as quickly as you recalled the date, you can set into motion a full-featured stopwatch. By the way, this stopwatch doesn't just count to 59 minutes like many other chronographs do—but up to 12 hours or more. It also precisely cleaves every second into tenths.

You may record split times, lap times or freeze the figures anytime. You may even alternate between your stopwatch functions and normal time ones without concern; by activating one mode, you don't interrupt the other.

\$99 buys an honest design

We wish you had a Realtime alarm chronograph in your hands right now. You'd see and feel the difference a 100% solid stainless steel case makes. (Most other comparably priced chronographs are chrome plated and not solid stainless.) Realtime's back and bracelet are also solid stainless. And every one of those bracelet links is double stamped to produce the exact size and taper required. Each link is then ground and polished. (We defy anyone to find workmanship like this, elsewhere at this price.)

You'll also notice there's no front speaker grill on this alarm chronograph; it doesn't need one. The alarm sound emanates from the rear of the case. Many other chronographs, in trying to look like Seiko with its front-mounted speaker, cleverly paste on printed front grills. These are functionless; they are just imitation. Everything you see on your Realtime chronograph is there for function, not for show.

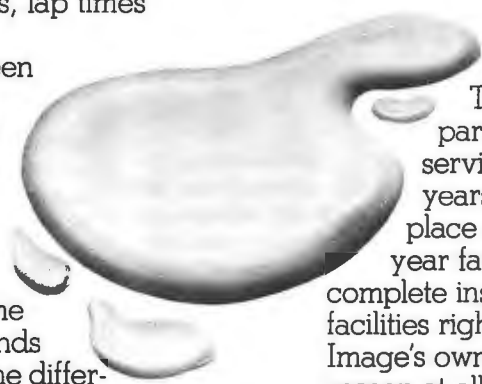

Water? Don't you worry.

The Realtime's face crystal isn't plastic like most chronographs you see. It's tough rock crystal. And not only is it hard enough to resist scratches, but it is fitted so tightly to the case that the chronograph has passed water immersion tests of up to 100 feet. We know of no other chronograph—at any price—that can offer you this security.

This chronograph also has no moving parts to break down, and it is unlikely that servicing will ever be required even after years of hard use. It comes with batteries in place (easily changed by any jeweler), a one-year factory warranty from its manufacturer, complete instructions, convenient service-by-mail facilities right here in the U.S., and The Sharper Image's own guarantee to customers: if for any reason at all, you are not completely delighted with your purchase, please return it within two weeks for a complete and courteous refund.

ORDER NOW. TOLL-FREE.



■ Credit card holders may use our toll-free ordering number, for quickest delivery. Or send check for \$99 plus \$1.50 delivery. Add \$5.94 tax in CA.

■ **(800) 227-3436**
■ In California (800) 622-0733

THE SHARPER IMAGE™
260 California St., Dept. RA—
San Francisco, CA 94111
(415) 788-4747
© 1979 The Sharper Image

CHRONOGRAPH WITH AND NO FAT.



The Best Deal In Car Stereo



Our FREE Catalog

The 76 page CRUTCHFIELD catalog is nationally recognized as the best source for car stereo product and installation information. It contains all you need to know to buy and install the ideal system for your car.

And it's FREE! Act now and you'll have it in just a few days.

- Over 200 car stereo products at discount prices
- All the specification, dimension and feature charts you'll need
- The best products in car stereo, including Blaupunkt, Clarion, Craig, Concord, Jensen, Marantz, Panasonic, Pioneer, Sanyo, and many more!
- Illustrated installation articles

Fill out the coupon and send right away for your FREE catalog. Or if you can't wait, call TOLL-FREE:

800-446-7924

In Virginia call 800-552-3961

Illustrated: Pioneer's new KE-2002 in-dash AM/FM stereo/cassette car stereo featuring electronic tuning and high fidelity specifications. TS-168 6 1/2" three-way speakers with exponential horns.

PIONEER

YES!

Rush me a FREE Catalog by First Class Mail

Name _____

Address _____

City _____

State _____

Zip _____

CRUTCHFIELD

1 Crutchfield Park, P.O. Box 1, Department E
Charlottesville, Virginia 22906

NEW PRODUCTS (Continued)

segment LED display shows the channel tuned, and a large illuminated meter displays relative signal strength and transmitter output power. Specifications: less than



0.7 μ V for 10 dB (S + N)/N sensitivity; 60-dB adjacent-channel selectivity and desensitization; 3 watts at 10% distortion audio output power into 8 ohms; 4 watts maximum, 3.6 watts minimum carrier power with no modulation; -65-dB spurious emissions; -40-dB transmitter, -45-dB receiver hum and noise. \$319.95.

CIRCLE NO. 92 ON FREE INFORMATION CARD

Compact Electric Drill

Wahl Clipper Corporation's "Iso-Tip" is a compact electric drill that's said to be ideal for circuit board revision, solder removal,



and lead hole cleaning, among other jobs. It runs at about 9000 rpm and accommodates drills and burs with shank size up to 1/8". Less than 5" long (excluding drill bit), the Iso-Tip is small enough to use at close quarters. The device is housed in high-impact plastic and is equipped with a 10' power cord, as well as a collet chuck, four collets and two drill bits.

CIRCLE NO. 93 ON FREE INFORMATION CARD

Antenna Rotor System

The new Ham IV from Cornell-Dubilier Electric Corp. is an antenna rotor system for large communication arrays with maximum wind load areas of 15 sq ft when tower mounted. Includes such features as ma-



chined steel drive gears, dual transformer circuitry, power braking, a control unit with illuminated meter readout, and low-voltage operation. \$224.95.

Bose Spatial-Control Receiver

Designed to complement Bose 901 Direct/Reflecting speakers, but usable with other speakers as well, the Spatial Control Receiver contains equalization for the 901's and "source and room compensation" controls that function in lieu of tone controls. In addition, it is capable of directing mid and high frequencies to either the inner or outer banks of reflected drivers of the 901's, narrowing or widening the stereo image at the listener's option. Bass is directed equally to all drivers at all times. The unit contains four main power amplifiers and two secondary amplifiers for driving headphones. Strapped in pairs, the large amps are rated at 100 watts per channel into 8 ohms, 20 Hz to 20 kHz, with no more than 0.09% THD. The FM section is said to achieve 50 dB of quieting in stereo with an input signal of just over 36 dBf. \$799.


CIRCLE NO. 94 ON FREE INFORMATION CARD

Anixter-Mark CB Antenna Upgrader

Anixter-Mark's "Little Devil" adapter is designed to allow CBers to upgrade to a higher-performance antenna without requiring a new mount or cable assembly. The base loading coil merely unscrews from the present antenna and the Little Devil



(Continued on page 14)

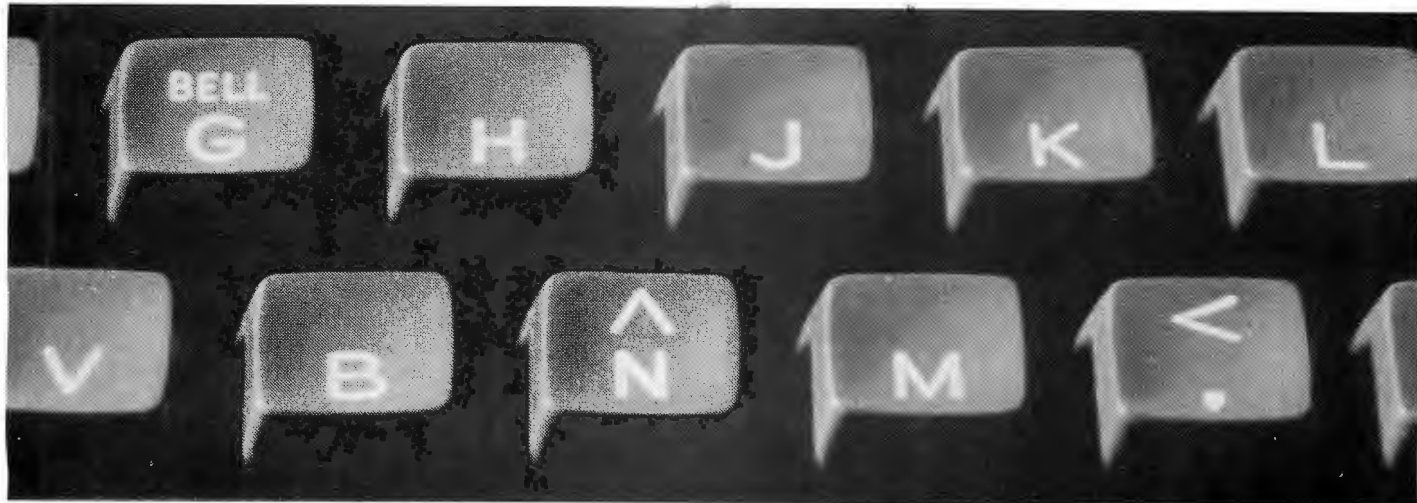

Using a computer is easy... for onComputing readers.

Read onComputing to find out . . .

- **What a micro-computer can do**
- **How to get started**
- **What's new in personal computers**
- **Where to buy your computer**
- **How to use your computer**

The editors of **onComputing** realize that much of the material written about computers is not at all suited to the person who just wants to use a computer as a tool for business, education, home entertainment, laboratory work, or other applications. **onComputing** is dedicated to helping the computer user understand the capabilities of a microcomputer—in non-technical language.

onComputing is entertaining and informative. It contains practical articles on how to get started, including what you'll need for your application and what it will cost. It features book reviews, product reviews, information on what's

new in personal computers, where to buy a personal computer, and—how to use it.

onComputing is a totally new publication. It is issued quarterly and contains articles from some of the best known names as well as from competent amateurs. It is edited and produced under the guidance of an experienced staff of computer experts. The articles in **onComputing** have never appeared in any other publication. They are all fresh, informative, and valuable reading for anyone interested in using a computer—for fun or profit!

onComputing™
GUIDE TO PERSONAL COMPUTING
Start your subscription today.

EVERY THREE MONTHS **onComputing** will bring the latest developments in the field of personal computing: use, applications, books, selection—all in an easy-to-read style.

© onComputing, Inc. 1979

onComputing Subscription Department, P.O. Box 307, Martinsville, NJ 08836
REGULAR subscription rate.

U.S. 1 yr. (4 issues) @ \$8.50 Canada & Mexico 1 yr. (4 issues) @ \$10.00

FOREIGN (to expedite service, please remit in U.S. funds drawn on a U.S. bank.)

Europe (and all other countries, except above) 1 yr. @ \$12.00—surface delivery
Bill VISA Bill Master Charge Bill me (North America only)

Card Number _____ Expiration _____

Signature _____

Name (Please print) _____

Street/Apartment Number _____

City _____

State/Province/Country _____

Postal Code _____

7389

CIRCLE NO. 11 ON FREE INFORMATION CARD

Grandfather's Clock Was Never Like This!



If you love contemporary design but want the more traditional, here is the clock for you. In creating our own version of the ever popular Grandfather Clock, we use the electronic eye to display each second, minute, and hour, and also the simulated pendulum motion.

The diagonal model which has no simulated pendulum is available for wall mounting or with base as a desk clock.

Our synthesized sounds composed of tic toc, modified Westminster Chimes and Bongs are available for any AMELECT clock. The chimes and bongs are composed of six frequencies, providing realistic bell sounds. They are totally within clock cabinet.

The AMELECT clocks, cabinets may be your choice of Cherry, Mahogany, Maple, or Walnut hardwoods.

	Assembled	Kit	Base
CL7401A Diagonal	\$79.50	\$59.50	\$9.60
CL7402 Grandpa	\$99.50	\$75.50	
Chimes	\$45.00	\$39.00	

Shipping and Handling, \$3.50

To order write or call

Allow 4 to 6 weeks for delivery

AMELECT

INCORPORATED

Postoffice Box 367

GOODLAND, INDIANA 47948

Phone 219-297-3320

NEW PRODUCTS (Continued)

screws into its place. All of the popular accessories can be used with the Little Devil, which has a $\frac{3}{8}$ "-24 thread. The mount and cable from the old antenna installation can still be used, saving on that part of the system. The adapter can be used with both trunk and lip mounts.

CIRCLE NO. 95 ON FREE INFORMATION CARD

Programmable Clock Radio

General Electric announced the first AM/FM programmable digital standard broadcast clock radio, "The Great Awakening" Model 4880. It has a programming keyboard for entering a variety of time and operating functions. For example, two people



can wake up at different times to different stations without resetting, or the two systems can be used for weekday/weekend wake-up times. Further, one can fall asleep listening to one station and wake up to a completely different station. Memory capability to store six radio stations, instantly recallable by touching a button, is built in. Also all timekeeping and memory information is protected by battery back-up during power outages. \$116.95.

CIRCLE NO. 96 ON FREE INFORMATION CARD

Automotive Speaker Adapter

East Coast Enterprises has introduced "Adapt-A-Sound," a device that matches a standard 6" by 9" automotive loudspeaker to the 4" by 10" mounting locations provided in some of the newer, space-efficient



cars. The adapter is said to cause little or no loss of sound quality. A snap-in mounting spring designed to fit all 4" by 10" locations is claimed to simplify and facilitate installation. Address: East Coast Enterprises, Inc., P.O. Box 639664, Miami, FL 33163.

Sansui Integrated Amplifier

A slew rate of 200 V/microsecond (said to reduce transient intermodulation to vanishing point) is given as one of the premier specifications of the Sansui AU-919 integrated amplifier. The direct-coupled amplifier, which is equipped with protective circuitry designed to limit dc at speaker terminals to a safe value, is rated to deliver at least 100 watts per channel to an 8-ohm load, 5 Hz to 20 kHz, with no more than 0.008% THD. The phono equalization amplifier of the preamp section includes inputs for moving-coil and fixed-coil pickups. With the latter, it is said to yield a signal-to-noise ratio of 90 dB. Rated accuracy of EQ is ± 0.2 dB, 20 Hz to 20 kHz. \$800.

CIRCLE NO. 97 ON FREE INFORMATION CARD

Desoldering Tool for Mini-Boards

Hunter Associates is offering the Model GSS Desoldering Tool, which is intended for use on miniature and microminiature circuit boards and modules. Operating by



means of compressed air, the tool creates suction in its tip, with the high-pressure air flow causing a continuous self-cleaning action as well. Air can be supplied either from a pressurized line or by an ordinary foot pump. The tool has a tip 2.4 mm in diameter with a 1.2-mm vent. \$39.95.

CIRCLE NO. 98 ON FREE INFORMATION CARD

Debounce Switch

Cincinnati ElectroSystems' new Debounce Switch provides a convenient method for clocking logic circuits without contact bounce. A pushbutton switch, when operated, generates a choice of positive or negative 10- μ s pulse or a level change. This latest addition to the company's Black Box series of laboratory instruments measures 4" x 2 $\frac{1}{4}$ " x 1 $\frac{9}{16}$ " (102 x 73 x 40 mm). It is designed to be powered from virtually any 5- to 15-volt external dc source. \$7.95. Address: Cincinnati ElectroSystems Inc., 469 Ward's Corner Rd., Loveland, OH 45140.



New Literature

HEATH INSTRUMENT CATALOG

Described in a 35-page catalog is the complete Heath-Schlumberger line of instruments. Included are: computer systems, distortion analyzers, frequency counters, generators, individual learning programs, testers, oscilloscopes, power supplies, recorders, TV service, and accessories. Products are illustrated and full specifications are given. Address: Heath/Schlumberger Instruments, Benton Harbor, MI 49022.

NEWSLETTER FOR ELECTRONIC GUITARISTS/MUSICIANS

Device, the Newsletter for the Electronic Guitarist/Musician, is a monthly publication for musicians involved in today's technology. Co-edited by Craig Anderton and Roger Clay, subjects regularly covered include reviews of musical equipment, construction articles, interviews, features on circuit design and reader opinion polls. Rates are \$15/year (USA), \$16 (Canada/Mexico) and \$18 (International). A free sample issue is available from *Device*, P.O. Box C, Carmichael, CA 95608.

GOULD OSCILLOSCOPE BULLETIN

Rugged, lightweight professional oscilloscopes with standard features usually found in more expensive instruments are described in a new four-page illustrated bulletin from Gould. The listing includes three dual-trace and one true dual-beam scopes that range in price from \$595 to \$995. For a free copy of Form No. 449-7, contact: Marketing Services, Gould Inc., Instruments Div., 3631 Perkins Ave., Cleveland, OH 44115.

RADIO SHACK MICROCOMPUTER CATALOG

The TRS-80 Microcomputer Catalog #RSC-2 is offered by Radio Shack. The 20-page catalog includes current information on the TRS-80 microcomputer, its peripherals and accessories with descriptions, application ideas and specifications. A general section explains what a computer is, what it can do, "Who can use the TRS-80," and "Why the TRS-80?" The catalog then describes the TRS-80 System, Level-I and Level-II Basic Language, and the peripheral equipment available for use with the TRS-80 including its expansion interface, Mini-Disk System, printers, interfaces, manuals and TRS-80 System Desk. Address: Radio Shack, 1400 One Tandy Center, Fort Worth, TX 76102

AKAI STEREO COMPONENT CATALOG

Akai's 56-page catalog describes its full line of stereo components, including tape decks, turntables, receivers, amplifiers, tuners, loud-speaker systems, an equipment cabinet, a mic/line mixer and stereo accessories. The catalog has information on product features, specifications, and color photos of each model, plus a glossary to explain specifications and provide stereo terminology. Address: Catalog, Akai America, Ltd., P.O. Box 6010, Compton, CA 90224.

ANTENNA INCORPORATED CATALOG

An expanded Land Mobile Antenna catalog for commercial two-way communications

systems is offered by Antenna Incorporated. The catalog includes several new antenna models and provides reference material in chart format, enabling the reader to match antenna frequency range and model number with the desired type of antenna mount. Included are: 100- and 200-watt low-band vhf antennas; 100-, 150- and 200-watt, 3-dB gain, high-band vhf antennas; 100-watt and 150-watt, 5-dB gain collinear uhf antennas; 1/4-wavelength models; heavy-duty mobile antennas for use between 25 and 54 MHz; "disguise" cowl-mount models and base station antennas. Address: Antenna Incorporated, 26301 Richmond Road, Cleveland, OH 44146.

WE DARE YOU

Stop reading. And start listening. It's that simple.

Even with today's tape technology, there's no such thing as an ideal tape for every machine. Only what's best for *you*. Which depends only on the sound *you* like and the response of *your* deck.

Compare specs if you wish—we'll match ours against anyone else's. But we honestly think you'll be more impressed by comparing the *sound* of our FX-I or II to that of any other premium cassette.

Visit your audio dealer and take the Fuji challenge.

FUJI

Magnetic Tape Division
of Fuji Photo Film U.S.A., Inc.
350 Fifth Avenue,
New York, New York 10001



CIRCLE NO. 24 ON FREE INFORMATION CARD

Now NRI makes it TV/Audio home

**Side-by-side
equipment comparison
of NRI and two
other leading schools
shows what you get
for what you pay.
When you have to pay
as much as \$905 more
for another school's course,
you should carefully
consider your tuition
investment.**

When you sit down and try to pick out the school that's best for you, it gets

to be a problem. Catalogs are radically different and some are not too clear as to what you actually get for your money. So NRI has done a lot of the work for you. And put the prices right up front so you can make your own judgment.

Of course, we can't compare everything. Lesson clarity and content vary. What one covers here, another covers there...or not at all. The material one school breaks down into eight lessons may be four at another. And the qualifications and abilities of instructors are another question.

One Million Students, Over 65 Years' Experience

So we can only tell you what NRI has to offer. We've been in education since 1914, starting as a radio school six years before commercial broadcasting was even on the scene. Since then, we've kept right up with the times, improving techniques, adding material, creating new courses to help people improve their skills and income.

Early on, we learned to keep our lessons compact...thoroughly covering a subject, but not so much that students would be overwhelmed. We call them "bite-size" lessons because they're easy to digest.

Learn by Doing with "Hands-on" Training

And, we pioneered the concept of "hands-on" training. NRI goes far beyond theory and textbooks to give our students actual bench experience and prepare them for the realities of electronic servicing. Every piece of equipment in our Master Course in TV and Audio Servicing is designed for learning.

You build your own big-screen TV, the only one complete with computer tuning that lets you program an entire evening's entertainment...a solid-state

	NRI	SCHOOL A	SCHOOL B
COURSE TITLE	Master Course in TV, Audio, and Video System Servicing	Master Course in Color TV Servicing	Electronics Technology and Advanced Troubleshooting I & II
CASH PRICE (terms available)	\$1,375	\$1539	\$2280
TV SET	NRI designed-for-learning kit. 25" (diagonal) color TV with built-in computer programming and cabinet	Heathkit GR-2001 25" (diagonal) color TV (cabinet extra)	Zenith model G4020W 19" (diagonal) color TV (fully assembled)
OSCILLOSCOPE	NRI designed-for-learning kit. 5" (8 x 10 cm) triggered sweep	Heathkit IO-4541 5" (8 x 10 cm) triggered sweep (not given until after graduation)	Heathkit IO-4541 5" (8 x 10 cm) triggered sweep
COLOR BAR GENERATOR	NRI designed-for-learning kit. 10 patterns	Elenco SG-200 (kit) 10 patterns	Elenco SG-200 (fully assembled) 10 patterns
FREQUENCY COUNTER	NRI designed-for-learning kit. Complimentary metal oxide semiconductor digital type		
METER	NRI designed-for-learning kit. Transistorized AC/DC volt-ohm meter	Heathkit (part of TV kit) DC only; 1K Ohm/volt	Private label multimeter
AUDIO	NRI designed-for-learning kit. Solid-state stereo AM/FM receiver with cabinet and speakers	Private label pocket transistor AM radio kit and AM-FM-SW solid-state portable radio kit	
TRAINER	NRI Discovery Lab	Breadboard	Experimental Electronics Lab
MISCELLANEOUS EQUIPMENT	Digital logic probe built into TV set	EICO Digital Logic Probe	

All data as shown in each school's catalog as of April 1, 1979.



Learn as you build with "hands-on" training.

RUSH THIS POSTAGE-PAID CARD FOR YOUR FREE CATALOG.

NO SALESMAN WILL CALL.

NEW FROM NRI...

- TV/Audio/Video servicing courses with computerized TV that programs an entire evening's entertainment
- All-new Computer Electronics courses with designed-for-learning microcomputer you build and keep
- New Professional Appliance Servicing courses with training in solid-state and electronic controls
- Complete Communications course with digitally synthesized transceiver you assemble as you learn



Name _____ (Please Print) _____ Age _____

Street _____

City _____ State _____ Zip _____

Accredited by the Accrediting Commission of
the National Home Study Council

1-089

CHECK ONE:

- ☐ Color TV, Audio, and Video System Servicing
- ☐ Computer Electronics Including Microcomputers
- ☐ Communications with CB • Complete Communications Electronics • FCC Licenses • Aircraft Electronics • Mobile Communications • Marine Electronics
- ☐ CB Specialist Course
- ☐ Amateur Radio • Basic and Advanced Courses
- ☐ Industrial & Business Electronics • Digital Electronics • Electronic Technology • Basic Electronics
- ☐ Small Engine Servicing
- ☐ Electrical Appliance Servicing
- ☐ Automotive Mechanics
- ☐ Auto Air Conditioning Specialist
- ☐ Air Conditioning, Refrigeration, Heating and Solar Technology Courses

All career courses approved
under GI Bill. Check for facts.

POPULAR ELECTRONICS



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 10008 WASHINGTON, D.C.

POSTAGE WILL BE PAID BY ADDRESSEE

NRI Schools

McGraw Hill Continuing
Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016



easy to compare study courses.

stereo tuner and amplifier with speakers
...your own oscilloscope, digital frequency
counter, and other instruments you use in
your course, use later to service TV's,
audio equipment, and video tape units.

The point is, none of this equipment
is hobby-kit or commercial assembly line
units with lessons "retrofitted" to what
was at hand. NRI has designed each so
you get invaluable training and experi-
ence you just can't get any other way.
As you build, you study operation of cir-
cuitry, see how sections interact, perform
"power-on" experiments only possible
with NRI. This total training is exclusive
with NRI...no other school, home study
or resident, offers it.

Instructors Who Know Their Business

NRI instructors are thoroughly
qualified, with both technical and educa-
tional experience. Most of them helped
develop NRI courses, lessons, and equip-
ment, so they really know what they're
talking about. They're interested in their
students, always ready to help with a
question, a problem...give good advice
to help you reach your goals.

It's instructors and training like
this that have made NRI the choice of
professional TV servicemen who have
taken home study courses. As a national
survey shows (summary on request), they
recommend NRI by a majority of three to
one over any other school.

So how does NRI give you all this
and still cost so little? We keep costs down
by designing our own training kits,
eliminating the middleman's profit on
hobby kits or commercial units. And by
offering our training by mail only. We
have no sales force, no commissions to
pay. You make up your mind in your own
time, without pressure, let the facts speak
for themselves. We pass these savings on
to you in the form of lower tuitions, more
equipment, carefully designed courses
and effective lessons.

Send for Free Catalog, No Salesman Will Call

Send for our free catalog today
and get all the details. See every piece of
equipment and kit you get...a complete
listing of fully described lessons...expla-
nations of each and every experiment you
perform. Read about NRI's background
and qualifications...career opportunities
...what NRI graduates say about their
training...costs and monthly payment
plans for the courses that interest you.
Then compare NRI value and results and
make your decision. Like the million
that have gone before you, we think
you'll choose NRI. Send the card today.



Build and keep 2-meter transceiver, test equipment
for a communications career.

Or check out NRI value-training in Computer or Communications/ CB Equipment Servicing.

NRI's new Microcomputer and
Microprocessor course trains you to be the
complete computer technician, at home
with both hardware and software. As
you learn, you build your own advanced
technology microcomputer, get "hands-
on" experience in servicing and pro-
gramming. Or you may want to look into
the expanding world of communications
...mobile
radio, CB,

microwave, commercial broadcasting,
and more. NRI can help you as you build
and experiment with your own digitally
synthesized 2-meter transceiver. For facts
on these and other NRI home study
courses, check the postage-paid card and
mail today. If card is missing, write to:



NRI Schools
McGraw-Hill Continuing
Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016





Stereo Scene

By Ralph Hodges

RECORDING AS NATURE INTENDED

IT WAS to be a typical recording session (details of time and place are not pertinent to this discussion), and once it began, our little party of journalists took just five minutes to zero in on the best seats from which to hear the orchestra. What we heard as the music unfolded was indeed magnificent. As I sat, spellbound by the glorious sound, I could almost visualize my own microphones hanging there just so far off the floor and just the right distance from the front desks of musicians.

However, that wasn't where the mikes were at all! For one thing, instead of the two or perhaps three I had visualized, there were some two dozen (neither the producer nor the engineer could recall the exact number) and they were strewn around the orchestra like raisins in a fruit cake. The treatment of French horns was particularly puzzling. Sound-reflecting panels had been erected a short distance behind them, which seemed logical because the bell of the horn faces to the rear and the back wall of the stage reflects the sound out to the audience.

Since the recording team had brought the orchestra off the stage and out into what would be the audience seating area—a very common practice in U. S. orchestra recording—something was needed to take the place of the stage's enclosure. What seemed less logical was that the mikes were not in front of the horns but behind them, a few feet away from the reflecting panels. Now if God intended the French horn to be heard with its bell pointing away from the listener or the microphone, what were mikes doing behind the horns and in line with the bell openings? Certainly the sound in the control room did nothing to throw light on the matter.

I suppose I have heard worse emanating from a set of monitors, but that's not saying much. When, for example,

the producer wanted to make sure the brass did not drown out the strings, he had the engineer turn up the string mikes—often to the point where the violins became shrill caricatures of themselves. With microphones sprinkled hither and yon throughout the orchestra, there were no landmarks by which a listener could get his bearings in the stereo image. Perhaps this was just as well, for a more plausible perspective that churned and twisted as this one did (because of the continual changes in instrumental balance that were being dialed in), might have caused motion sickness. The tympani were getting into all the microphones, thus losing their crispness and much of the "snap" of their impact. It was discouraging to realize that this sound was the product for which many dollars per minute were being spent, when you could walk 30 steps into the hall and hear how wrong it all was.

Miking the Space. A reaction against this sort of recording technique has been underway for some time now. As a concept it might be termed "miking the space." Instead of trying to pick up 40 violins, 25 violas, 20 cellos, 10 string basses, 2 oboes, etc., you adopt the outlook that you're going to try to capture every acoustic event that takes place in an area of, say, 80 by 40 feet—the sort of area a symphony orchestra might occupy. The nature of the acoustic event doesn't matter—it might be a concert of music, a tap-dancing competition, a game of dice, or a fly buzzing around. What matters is that the event as recorded sounds natural; that it seems to occupy the amount of space that it did in reality; and that its aural perspectives are preserved. If something is happening in the rear or over to the left, the sound should come from there when the finished recording is played back.

Of course, this is not the sort of recording technique you use if you are trying to cover up deficiencies in the performance or flatter the sound in some way. What actually takes place is what the microphones hear and the tape preserves, warts and all. Nor is it a technique that is easy to bring off in every environment. But if you accept the idea that the space need not be a nice neat rectangle as long as your performing forces can be squeezed into it, and if you realize in advance that the minimum number of microphones required is usually best, with additional microphones often proving detrimental, you can usually manage something.

Here is a procedure I very often find helpful, although like everything in audio, it is fallible. First consider the recording environment, because it will determine the character of the reverberation present on the finished tape. A small auditorium, for example, is usually less reverberant than a stone church. This means that microphones can usually be placed a bit farther away from the performers without loss of clarity. An advantage can be realized here when working with very few microphones, because a more distant mike means less variation in performer-to-mike distance for any given performer and fewer problems with balance. If the performers know how to balance themselves, the recording will be balanced.

A church may require closer miking if reverberation is not to interfere with clarity. In this case, you might want to try more closely spaced mikes and group the performers in an arc around them; in other words, the "space" you're defining now becomes a rough semicircle instead of a rectangle. These suggestions are perforce very general; every recording situation is a cut-and-try proposition.

Setting Up. Once the mikes are roughly placed (and before the performers arrive), send your assistant to stage center and have him move forward and back, continuously announcing his distance from an imaginary line connecting the microphones. When the monitor system yields what seems to you the most pleasing balance between the sound coming directly from him and the reverberation his voice sets up in the environment, you've established an approximate "subjective distance" for the performance—subjective because you will usually find that he is somewhat closer to the mikes than he sounds to be. Have him mark his position on the stage floor

POLICE RADAR MEETS ITS MATCH.



With GUL's Micro Scan, you can own a high-technology radar detector for only \$79.

Your radar detector should do two things well: give you as much advance warning of police radar as possible, and screen out false signals. And few competitive units are able to perform both these functions well. However, the GUL G-73, developed by B.E.L. Laboratories represents a breakthrough in both sensitivity and false signal rejection in a compact, well-designed case.

Road Superiority.


The 10-year researched GUL has been tested numerous times against such units as the Fuzzbuster XK, the Whistler XK and the XK Snooper. In separate tests conducted by the Canadian Tire Corporation and Motor Consumer Report, the GUL demonstrated a detection distance significantly greater on both X and K bands, than all three competitors. Its nondirectional elliptical horn antenna receives these signals from front, back, and sides, and is even sensitive enough to detect the new short pulse KR-11 radar. Signals of less than .01 millionths of a volt (ranging from 9.445-24.445 GHz) are sufficient to trigger the alert signal and provide valuable warnings when approaching hills and curves. An adjustable gain control

A good driving record makes for lower insurance rates and prevents possible loss of your driver's license. GUL can help protect yours. It may even pay for itself within the first year of use, depending upon your driving habits.

knob lets you optimize GUL's sensitivity for both city and country conditions.

Doesn't Cry "Wolf."

The GUL takes full advantage of modern integrated circuit technology to provide a capability of more than 100 transistors. Many competitive units try to get by with

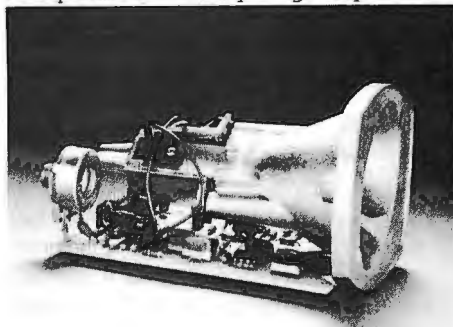

as few as 20 transistors and they just don't work as well. GUL's sophisticated circuitry is completely shielded by a diecast and extruded aluminum case. This not only provides a better wearing case than the often used plastic ones, but also protects the input terminals from stray signals, the most common cause of false alarms. In addition, the GUL uses an internal voltage regulator, commutating filter, and

synchronous detector to reduce power consumption to a minimum and provide a more stable gain setting—features usually found only in units costing twice as much.

Two Warnings You Can't Miss.

The GUL uses a double warning system. Both a tone and light come on in the presence of radar. And both remain on until radar is gone. You're never lulled into a false sense of security by a tone that sounds once and then goes off. And you can control the tone with a front-mounted on/off switch.

Quick Installation.

The GUL detector is one of the most compact units available, measuring only 4"x3"x4½", and weighing just 20 oz. Its aluminum case is finished in glare-free matte black and comes with its bracket in place. To mount, simply take the adhesive Velcro pad, peel off the back, and adhere it to the top of your dashboard. The bottom of the bracket has a matching Velcro foot which anchors your unit securely on top of the dash. It plugs into your cigarette lighter. That's all there is to it. The same Velcro mounting also allows for easy removal in seconds to prevent theft. The small size GUL will fit into any glove compartment.

Try It Yourself.

Order the new GUL detector today. Better yet, road test it yourself. See how comforting it is to observe police radar when it's observing you. If you don't find it to be the best electronic counter-intelligence you can have for \$79, simply mail it back: Your GUL comes with The Sharper Image two-week return privilege and a manufacturer's 120-day warranty.

ORDER NOW TOLL-FREE

Call the toll-free ordering number below and charge it to your credit card, or send check for \$79 plus \$2.50 delivery (add \$4.74 tax in CA).

(800) 227-3436

In California (800) 622-0733

THE SHARPER IMAGE™

260 California St., Dept. GL—
San Francisco, CA 94111
(415) 788-4747

with a strip of that indispensable silver tape.

Then, while he faces forward and talks continuously, have him move left and right on a traverse that approximately encompasses the width you expect the performing group to occupy on stage. If at any time during his traverse his voice seems to recede, have him move forward until the original sense of distance is restored and mark that position with tape. (And, of course, have him move back appropriately if his voice seems to approach the microphones.) When this process is over you will have established a base line for the front row of performers. Ultimately you'll be able to move them slightly forward or back of this line to establish final balances.

Finally, your assistant should cavort around the performing area stamping his feet, clapping his hands, and making as much noise as possible, but never stepping forward of the base line. As he does his act, you should get a vivid sense of continuous movement within a well-defined space. The space may not sound quite like the area blocked out on stage, but it should seem plausible.

The Inevitable Little Things. By this time you should be in pretty good shape for the arrival of the performers, who it is to be hoped will give you a few minutes of run-through so you can set final balances. If the environment is reverberant and you have had to mike fairly closely, you may find that sibilants are exaggerated in vocals. Raising the mikes somewhat and instructing the performers *not* to sing at the mikes but instead straight out into the presumed audience is the usual remedy.

A frequent problem that can be baffling unless you're prepared for it is the initial sound reflection that comes from the performer, caroms off the floor just in front of him, and reaches the microphone an instant after the direct sound. As a rule this is the strongest reflection you'll have to deal with, and it can have an appreciable influence on the sound. The easiest remedy is a sound absorber at the exact bounce point. Church-pew cushions can be highly recommended as absorbers. Do not, however, overdo the treatment at first. Start with a single cushion at the bounce point—which can be easily worked out when you consider that the angle of reflection will equal the angle of incidence—and work up from there as necessary.

If the performance calls upon the performers to move—or if they move whether required or not—you have a special problem. Practical stereo microphone setups simply do not respond to movement as two ears attached to a human head do. To get the most natural-sounding effect, you will probably have to discuss their movements with them in advance, using the subjective-distance base line as a guide. Even then there are likely to be difficulties.

... and it works. You may not believe it now, but with luck, application, and a mere two microphones, it is possible to get startlingly credible and satisfactory results with this basic technique, as many brilliant tapes produced by persevering amateurs have shown. Even large-studio professional recordists, who sometimes seem incapable of believing, have inadvertently proven it. Here, an anecdote might serve. It may be apocryphal in some details, but I believe it to be true in the overall sense.

Back shortly before the era of stereo, a major label had proposed to do an LP of excerpts from *Swan Lake* with a well-known orchestra. Evidently, the production was to be a quick and easy job just to fulfill contractual agreements. But

there was a hitch—the orchestra was going to be on tour on the date for which the session was scheduled, and the engineers knew nothing about miking the hall in which the recording would have to be made. Worse yet, there was no time to experiment.

This was an intimidating state of affairs because recording engineers and the particular hall had had a long history of enmity. Engineers had found the place prone to echoes, lack of clarity, unfortunate balances, and almost any other sonic ill you can name. The only statement that could be made in the hall's favor was that expert listeners have long found it to be one of the most thrilling and satisfactory environments in the world for listening to symphonic music. In the end, not knowing what else to do, the engineers hung a single microphone above the orchestra on stage and crossed their fingers.

The recording that resulted was peculiar in a number of respects. The strings sounded like strings instead of strident implements of aural torture; you could sense that the brasses could totally overpower them unless held in check by the conductor; and the instruments in the back of the orchestra actually sounded more distant than those in the front. The bass drum was a special revelation; when it went off, you knew something had really hit you—right in the gut. In short, the record had a signal on it that actually managed to represent a symphony orchestra with some plausibility.

And this recording sold—not immediately or in great numbers, but strongly and steadily. The company, convinced it had discovered a hitherto secret love affair between the American record-buying public and *Swan Lake*, some years later issued a two-LP stereo set of excerpts played by the same orchestra. This time, however, the engineers were on familiar ground and were able to fuss around with mikes and mike placements to their hearts' content. Imagine their surprise when the new, much more lavishly produced recording didn't sell.

As adamant as my ears may be on this point, I can't prove that the differences in recording technique alone account for the wide variation in sales between the two versions. But I suspect that anyone who has no investment in the status quo in recording will prefer the results of simple miking over the multi-mike "forest" technique, at least for classical music, given the chance to compare. If you have the opportunity, try it for yourself. ◇



★ **FREE!** ★

**NEW CATALOG OF
HARD-TO-FIND
PRECISION TOOLS**

Jensen's new catalog is jam-packed with more than 2000 quality items. Your single source for hard-to-find precision tools used by electronic technicians, scientists, engineers, instrument mechanics, schools, laboratories and government agencies. This popular catalog also contains Jensen's world-famous line of more than 40 tool kits. Send for your free copy today!

 **JENSEN TOOLS & ALLOYS**
1230 SOUTH PRIEST DRIVE • TEMPE, AZ. 85281

A BUSS & LAMSON COMPANY

CIRCLE NO. 33 ON FREE INFORMATION CARD

Julian Hirsch Audio Reports



Fisher Model ST460 Speaker System



The Model ST460 from Fisher is a floor-standing three-way speaker system whose

salient characteristic is high efficiency, which permits it to develop very high output levels when driven by low-to moderate-power amplifiers. Bass frequencies are propagated by a 15" (38.1-cm) woofer that operates at frequencies up to about 1000 Hz, where a pair of 5" (12.7-cm) cone-type midrange drivers take over. There is a second crossover at 5000 Hz to a single horn-loaded tweeter with a nominal 3" (7.5-cm) mouth diameter. Both crossovers have symmetrical, 12-dB/octave slopes.

Overall size of the ST460 is 29 1/4" x 18 1/4" x 14 9/16" (74.3 x 46.4 x 37 cm) and weight is 53 lb. Suggested retail price is \$389.95, or with genuine walnut veneer finish as the Model ST461 for \$409.95.

General Description. The drivers are mounted symmetrically on the front of the cabinet, with the woofer at the bottom in its own approximately 4-cu-ft ducted-port enclosure. The two midrange drivers are side by side above the woofer with the tweeter centered above them. At the top of the cabinet is a control panel with sepa-

rate three-position switches for adjusting the levels of the midrange and high-frequency drivers over a range of ± 3 dB. A pushbutton near the controls resets the circuit breaker that protects the system against overloads. The front of the speaker is covered by removable, acoustically transparent cloth.

Laboratory Measurements. We

made our basic measurements on the ST460 with the system's midrange and tweeter level controls in their 0-dB (center) positions. The frequency response curve obtained in the reverberant field of our testing room was spliced to a woofer response curve taken with close microphone spacing. The latter includes the separately measured contribution of the port radiation at very low frequencies, corrected for the relative radiating areas of the port and the driven cone.

As a rule, even a 12" woofer might be expected to show cone breakup, beaming, and other undesirable effects at an operating frequency as high as 1 kHz. We were not too surprised, therefore, to find response irregularities and a general drop in output from the ST460's 15" woofer beyond about 500 Hz.

Maximum bass output was reached at frequencies between 70 and 90 Hz, falling off steeply at lower frequencies. Contribution of the port is mostly at frequencies below 40 Hz; while it is effective to a degree between 20 and 40 Hz, the average output in this octave is far below that of the upper-bass. Above 100 Hz, the output dropped off smoothly and gradually to a minimum at 1000 Hz of 10 dB below the maximum bass level. Beyond 1000 Hz, the output again rose gradually to


Performance Specifications

Specification	Rating	Measured
Frequency response	40-20,000 Hz ± 10 dB	48-18,000 Hz ± 5 dB 20-19,000 Hz ± 10 dB
Efficiency (avg SPL at 1 meter, 1 watt)	92 dB	92 dB
Recommended amplifier power	25-130 watts	Confirmed
Peak distortion-free SPL with stereo pair in typical room	112 dB	Not checked
Crossover frequencies	1000 and 5000 Hz	Confirmed
Woofer diameter	15"	Confirmed
Voice coil	2"	Not checked
Loading	Ducted reflex	Confirmed
Midrange (size/type)	Two 5" cones	Confirmed
Voice coil diameter	9/16"	Not checked
Tweeter (size/type)	3" horn	2" mount diam.
Nominal impedance	8 ohms	Confirmed
Enclosure dimensions	29 1/4" x 18 1/4" x 14 9/16"	Confirmed
Weight	53 pounds	Confirmed

about +5 dB between 7000 and 16,000 Hz and fell off sharply at about 18,000 Hz. Overall frequency response (with the controls centered) was ± 5 dB from 48 to 19,000 Hz, well within Fisher's ratings. Tweeter dispersion was quite good.

The ST460's high efficiency was demonstrated by its ability to produce a 92-dB sound pressure level (SPL) at a distance of 1 meter when driven by 2.83 volts of random noise in an octave centered at 1000 Hz. The toneburst response was uniformly good, with no signs of prolonged ringing or spurious output frequencies. Impedance averaged about 8 ohms, reaching a maximum of about 30 ohms at the 65-Hz bass resonance and a minimum of 6 ohms at 750 Hz. Bass distortion at a 1-watt input was less than 1% from 100 to 50 Hz, and only 7% at 30 Hz. At a 10-watt input, distortion measured less than 2% down to about 50 Hz and climbed to 14% at 30 Hz.

User Comment. We listened to a stereo pair of the Fisher ST460 speakers mounted on stands that raised them about 7" above the floor—an arrangement that, while not critical, seems to enhance the sound of many speakers. What we heard sounded clean, with a generally good frequency balance that correlated well

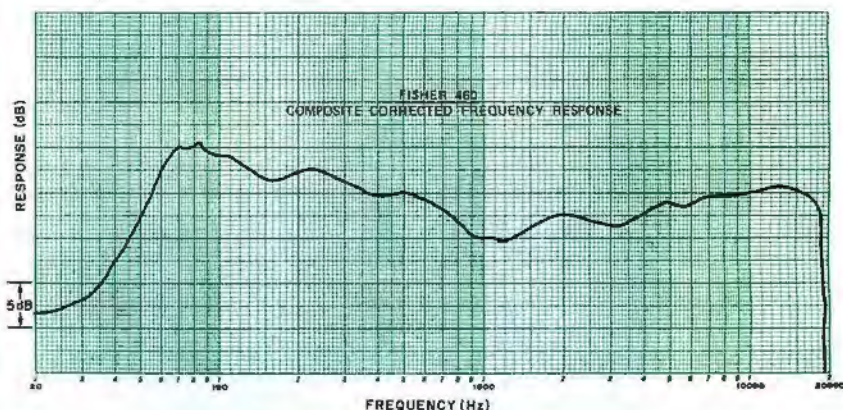

Composite corrected frequency response for ST460 Speaker System.

with what we had measured. Occasionally, we experienced a heaviness in male speaking voices and in some musical material. We attribute this to the emphasis in bass response around 80 Hz. Although some of the low-frequency performance is based on psychoacoustic illusion, it is convincing enough to give an overall impression of very solid bass.

Clearly, the balance of compromises (a component of all loudspeaker design) has been tipped in favor of disco and rock music in the case of the ST460. The frequency response gives a little extra "punch" to the bass and "sizzle" to the treble, without weakening the midrange to an extent that would cloud vocals. And while the

CIRCLE NO. 101 ON FREE INFORMATION CARD

system's performance with classical music might not suit the most demanding listeners, it is more than adequate for its intended application.

One characteristic of the ST460 that will probably have a special appeal to the rock and disco listener is its ability to conserve amplifier power. We were able to drive the system to ear-shattering levels with a 20-watt amplifier. On the other hand, the system took the output of a 200-watt amplifier right in stride. By most standards, the ST460 would not be considered cheap, but if the potential saving in amplifier power is taken into account, along with the level of musical performance offered, it seems like quite an economical speaker.



Shure M95HE Stereo Phono Cartridge



The Model M95-ED stereo cartridge has occupied the position just below the

V-15 Type III in Shure's product line,

filling the gap between the moderately priced M91 series and the deluxe V-15 series. Although priced only slightly above the M91, the M95 cartridge was designed for a somewhat flatter high-frequency response.

When Shure introduced the top-of-the-line Model V-15 Type IV phono cartridge last year, one of its features was a hyperelliptical stylus shape derived from the hyperbolic stylus previously developed for the M24H (CD-4) cartridge. This type of stylus has an extended contact area against the groove wall and a small radius that gives it excellent high-frequency tracking ability. It occupies the same position in the Shure products that the Shibata and its derivatives do in the lines of other manufacturers.

The new M95HE consists of an M95 body fitted with the new N95HE stylus. The diamond tip of the stylus is identical to that of the V-15 Type IV. According to Shure, it makes a reduction of as much as 25% in harmonic and intermodulation distortion compared to the elliptical stylus used in the M95ED. Since the M95 cartridge is electromagnetically similar to the


V-15 series, it would appear that adding the N95HE stylus to the M95 body might result in a cartridge that has many of the special qualities of the V-15 Type IV but at a substantially lower price.

The M95HE is designed to track at forces from 0.75 to 1.5 grams. Shure's "trackability" ratings rank it a close second to the V-15 Type IV. Since the body is that of a standard M95ED, owners of that cartridge can upgrade to an M95HE at any time by merely plugging in a new N95HE stylus assembly. The M95HE costs \$89.50, the N95HE stylus \$34.00.

Laboratory Measurements. We tested the M95HE in the tonearm of a Thorens Model TD-115C record player at the maximum tracking force of 1.5 grams. The electrical load was 47,000 ohms in parallel with 500 picofarads. Shure recommends capacitance between 400 and 500 pF, (more than most turntables and preamps supply), but response measurements with both values showed that 500 pF yielded flatter overall response.

The cartridge's output was 4.75 mV/channel at a 3.54-cm/s velocity. Channel levels balanced within 0.9 dB. The vertical stylus angle, measured with a CBS STR160 record, was 26°. Frequency response and channel separation were measured with CBS STR100, JVC TRS-1007, and B&K QR-2009 test records. In addition, we measured the separation at a number of spot frequencies with an Audio-Technica AT-6605 record.

Frequency response differences between the records were relatively minor. With the STR100 record, response was flat within ± 1 dB from 40 to 16,000 Hz falling to about -6 dB at 20,000 Hz. Channel separation readings fell into two groups. The CBS and B&K records revealed less separation than the JVC and Audio-Technica records, which were fairly similar. The midrange separation was 22 to 23 dB with the first two discs and 30 to 35 dB with the other two. At 10,000 Hz, the

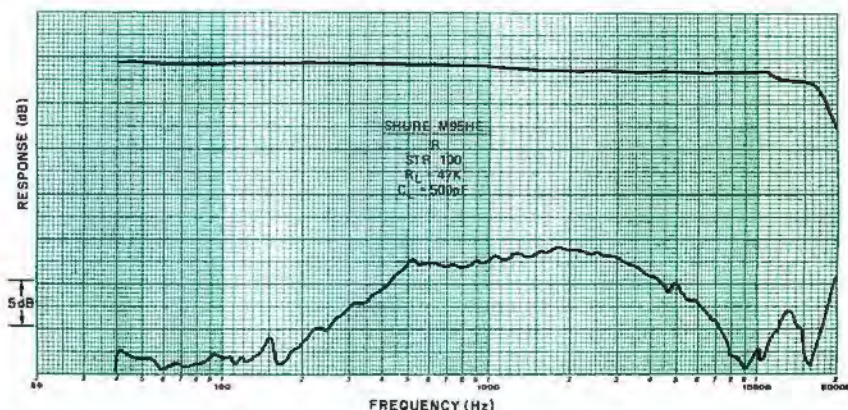

Frequency response and crosstalk for M95HE Stereo Phono Cartridge.

separation was 28 to 30 dB with all but the B&K record, which gave a 20-dB reading. At 20,000 Hz, the CBS and B&K records gave respective separation readings of 17.5 and 15 dB, while the JVC and Audio-Technica records showed a 22-dB separation.

The low-frequency resonance in the low-mass Thorens tonearm (14 grams effective mass, including the 6.3 grams of the cartridge) was at 10 Hz, with an amplitude of about 7 dB. Tracking distortion was measured with Shure's TTR102 (400- and 4000-Hz intermodulation distortion) and TTR103 (10.8-kHz tone bursts at a 270-Hz repetition rate) test records. The IM readings with the TTR102 increased from 2% or 3% at low levels to 6% to 8% at velocities in the 22-to-27-cm/s range. With the tracking force reduced to 1 gram, the cartridge mistracked severely above 22 cm/s. The repetition rate distortion with the TTR103 record was extremely low (Shure cartridges have consistently been outstanding in this test), increasing from 0.63% to 0.84% as the velocity increased from 15 to 30 cm/s.

Subjective tracking of the M95HE was judged with Shure "Audio Obstacle Course" records. As with the TTR103, we have found that Shure cartridges tend to be among the best in their ability to track these very-high-velocity musical selections without audible distortion. The M95HE was no exception, handling everything on the

ERA III record without difficulty and revealing only a trace of "hardness" on the highest levels of the bells and combined harp and flute sections of the ERA IV record.

User Comment. While it is easy to distinguish between a low-priced cartridge and a high-priced one by listening or measurement, differences tend to become more elusive when comparing cartridges of similar overall quality. Consequently, we found no dramatic audible differences between Shure's M95ED and M95HE cartridges. Their measured performance was similar, too, although most of the differences did favor the M95HE. Of course, we could not measure record wear, which should be appreciably lower with the greater contact area of the hyperelliptical stylus.

The M95HE supplements, but does not supplant, the M95ED in the Shure line. Anyone about to replace a worn stylus on the M95ED would do well to choose an N95HE, but it would be harder to justify replacing a good N95ED stylus with the N95HE just to modernize. While these two siblings can be distinguished on the basis of audible and measured performance, it is the family resemblance that prevails. It may be that reduced record wear, a fairly intangible factor hard to confirm through measurement, will tip the balance in favor of the M95HE.

CIRCLE NO. 102 ON FREE INFORMATION CARD

Lectrotech Model PPI-400 Dual-channel Peak Power Indicator

POPULAR ELECTRONICS



THE Lectrotech Model PPI-400 dual-channel, LED peak-power indicator is suitable


for monitoring the outputs of a stereo or two mono power amplifiers. It indicates power levels over a 30-dB range on two vertical columns of LEDs. A range switch provides 18 calibration points for the 0-dB level (six power levels at impedances of 4, 8, and 16 ohms). The indicator can also be calibrated to any other power or impedance over a very wide range by connecting appropriate resistances across terminals on the rear apron. The 0-dB power level can be set anywhere from 3 to 1250 watts at 8 ohms or over a different power range for impedances between 2 and 35 ohms.

The device can be connected across the speaker outputs of an amplifier or across the input terminals of the speaker systems themselves. It measures 14"W x 8"D x 3 3/4"H (35.6 x 20.3 x 9.5 cm) and weighs 3.5 lb (1.6 kg). Suggested retail price is \$129.95 (plus \$24.95 for optional No. LWC-1 walnut cabinet).

General Description. Each column of power indicators consists of eight calibrated LEDs. The bottom four are green LEDs and are labelled -30, -28, -24, and -12 dB. The next two are yellow LEDs and are labelled -9 and -6 dB. Finally, the two top LEDs are red and are labelled -3 and 0 dB. If the red LEDs flash during operation, it can be assumed that the amplifier is being overdriven or is being driven too close to its limits. This, of course, assumes that 0 dB corresponds to the amplifier's rated maximum output power.

The seven-position range switch has six positions calibrated in watts full-scale from 25 to 800 at a 4-ohm impedance. Separate inner scales are used for 8- and 16-ohm loads, with 0-dB power levels corresponding to 12.5 to 400 watts full-scale at 8 ohms and 6.25 to 200 watts full-scale at 16 ohms. The seventh position, labelled AUX, can be used with the optional calibration procedure to set the 0-dB sensitivity for almost any power and impedance level one wishes.

The Model PPI-400 is shipped from the factory with its calibration terminals connected together by jumper links and the AUX sensitivity set for 6.25 watts into 4 ohms for a 0-dB level indication. (This is 6 dB more sensitive than the lowest standard range.) By replacing the links with suitable resistances, their values determined according to a formula given in the own-

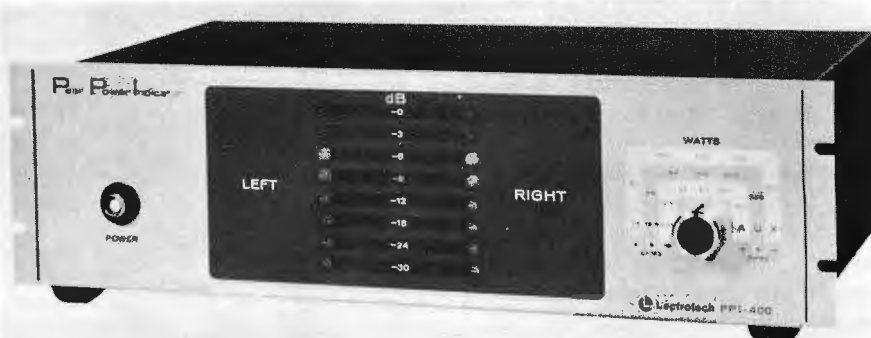

er's manual, the 0-dB sensitivity can be set as desired.

Although the accuracy of the 0-dB calibration depends on the accuracy of the resistors, the relationship between it and other power-level LEDs is fixed by the internal design of the Model PPI-400. (Precision resistors are available from Lectrotech.) Since the two channels are fully independent of each other, it is possible to set each for a different 0-dB reference.

Laboratory Measurements. We connected the Model PPI-400 across the output of an amplifier capable of developing the 60 volts or so required to activate its highest level LEDs. We then drove both channels in parallel to check the device's tracking.

The accuracy of the LED displays was checked at 1000 Hz. At each setting of the range switch, we increased the signal level until each of the LEDs in turn began to glow at its maximum brightness. The actual voltage applied to the device was then measured with an accurate meter and converted to an equivalent power level. Since the LEDs are not driven by a flip-flop or similar circuit, there was some ambiguity as to exactly when each LED was just on. The LEDs began to glow well below the level that produced full brightness, which resulted in an uncertainty factor of a couple of decibels when reading the display. In every case, however, the two channels behaved in identical manner.

The readings we obtained were consistently low. (The indicated power was less than the actual power.) If we had elected to use the point at which a LED first began to glow as our measuring criterion, the error would have been even greater. The error was not significant in any case, measuring about 1 dB and a maximum of 2 or 3 dB near the -24-dB indicator.

We measured the response of the

device with 1000-Hz tone-burst signals. As we changed the duty cycle from continuous to 4 cycles on and 128 cycles off, the error did not exceed 1 dB. Sensitivity was up about 0.7 dB at 20 Hz and down 4.4 dB at 20,000 Hz, relative to 1000 Hz.

User Comment. In view of its intended application as a peak-power indicator (not a meter), the errors we observed in the Model PPI-400 are of no significant import. The device does a fine job of displaying the actual operating signal levels—both average, shown by the number of LEDs lighted during any passage, and peak. (Even the briefest peak registers visibly on the display.)

The PPI-400 is easy to connect into an audio system, and its LED displays are clearly visible and easy to interpret even from a distance.

The owner's manual refers to the use of the Model PPI-400 as a speaker-system phasing checker. This is not entirely accurate, since all it can check is a polarity reversal of the two sets of signal leads coming from the amplifier to the speaker systems and to the device itself. Actual phasing of the connections at the speaker systems can have no effect on the behavior of the Model PPI-400.

A power-on indicator in the Model PPI-400 would have been a welcome addition. Its absence, for example, caused us to unwittingly leave the device powered for days on end. But even leaving it powered continuously, the PPI-400 operated coolly, even under full-load conditions.

In sum, this was one of the most versatile and inexpensive peak-power indicators we have used. It is attractive, flexible, and does exactly what it is supposed to do. Such a device can be an educational addition to an audio system.

CIRCLE NO. 103 ON FREE INFORMATION CARD

Use this card to send for facts about opportunities in the Marines

☐ Send me your book about opportunities in the Regular Marines

☐ Send me your book about hometown service in the Marine Reserve

Mr.
Ms. _____

(PLEASE PRINT)

Address _____

City _____

State _____ Zip _____

Telephone Number _____

Name of School _____

Date of Birth _____ Last Grade Completed _____
(Mo/Day/Yr)

MGPEX08019
Popular Electronics

Use this card to send for facts about opportunities in the Marines

☐ Send me your book about opportunities in the Regular Marines

☐ Send me your book about hometown service in the Marine Reserve

Mr.
Ms. _____

(PLEASE PRINT)

Address _____

City _____

State _____ Zip _____

Telephone Number _____

Name of School _____

Date of Birth _____ Last Grade Completed _____
(Mo/Day/Yr)

MGPEX08019
Popular Electronics

Headquarters Marine Corps
Code MRRA
Washington, D.C. 20380

Official Business
Penalty for Private Use, \$300

Postage and Fees Paid
Department of the Navy
DoD—317
FIRST CLASS MAIL



MARINE CORPS OPPORTUNITIES
Box 38901
Los Angeles, California 90038

Headquarters Marine Corps
Code MRRA
Washington, D.C. 20380

Official Business
Penalty for Private Use, \$300

Postage and Fees Paid
Department of the Navy
DoD—317
FIRST CLASS MAIL



MARINE CORPS OPPORTUNITIES
Box 38901
Los Angeles, California 90038

If you can carry on a tradition...



Marine Corps tradition is one of strength and pride. And, as a Marine, you learn to carry it on. You learn an important job skill

from those who know their trade. You sharpen your confidence with tough physical training. And, then, you walk with pride. Because you've earned a part in

the tradition of the Corps. Find out more about us. Mail the card or call 800-423-2600, toll free. In California, 800-252-0241.

Maybe you can be one of us.



The Few.
The Proud.
The Marines.

CIRCLE NO. 51 ON FREE INFORMATION CARD

NEW FROM DSI!

50 Hz — 500 MHz 8 DIGITS

1 Meg INPUT — 1 Hz RESOLUTION — 1 PPM TCXO

- AC—DC Operation
- BNC Inputs 1 Meg Direct 50 Ohms Prescaled
- 8 Large .4" LED Readouts
- Auto Decimal Point & Zero Blanking
- 1 Year Limited Warranty Parts & Labor
- 100% Factory Assembled in U.S.A.

\$149⁹⁵

MODEL 500 HH
50 Hz — 500 MHz
Without Battery Capability

MODEL 100 HH
50 Hz — 100 MHz

\$99⁹⁵

Without Battery Capability

SAVE \$5⁰⁰

With Battery Capability

MODEL 500 HH ... \$169.95

MODEL 100 HH .. \$119.95

The 100 HH and 500 HH hand held frequency counters represent a significant new advancement, utilizing the latest LSI design . . . and because it's a DSI innovation, you know it obsoletes any competitive makes, both in price and performance. No longer do you have to sacrifice accuracy, ultra small readouts and poor resolution to get a calculator size instrument. Both the 100 HH and 500 HH have eight .4 inch LED digits — 1 Hz resolution — direct in only 1 sec. or 10 Hz in .1 sec. — 1 PPM TCXO time base. These counters are perfect for all applications be it mobile, hilltop, marine or bench work. CALL TODAY TOLL FREE: (800—854-2049) Cal. Res. CALL (800—542-6253) TO ORDER OR RECEIVE MORE INFORMATION ON DSI'S FULL PRODUCT LINE OF FREQUENCY COUNTERS RANGING FROM 10 Hz TO 1.3 GHz.

FREQUENCY COUNTER CONSUMER DATA COMPARISON CHART

MANUFACTURER	MODEL	SUG'STD. LIST PRICE	FREQUENCY RANGE	TYPE OF TIME BASE	ACCURACY OVER TEMPERATURE		SENSITIVITY			DIGITS		PRE-SCALE INPUT RESOLUTION	
					17° - 40°C	0° - 40°C	100 Hz - 25 MHz	50 MHz - 250 MHz	250 MHz - 450 MHz	No.	SIZE IN INCHES	1 SEC	1 SEC
DSI INSTRUMENTS	100 HH	\$ 99.95	50Hz-100MHz	TCXO	1 PPM	2 PPM	25 MV	NA	NA	8	.4	100 Hz	10 Hz
DSI INSTRUMENTS	500 HH	\$149.95	50Hz-550MHz	TCXO	3 PPM	2 PPM	25 MV	20 MV	30 MV	8	.4	100 Hz	10 Hz
CSC†	MAX-550	\$149.95	1kHz-550MHz	Non-Compensated	3 PPM @ 25°C	8 PPM	500 MV*	250 MV	250 MV	6	1	NA	1 kHz
OPTOELECTRONICS	OPT-7000	\$139.95	10Hz-600MHz	TCXO	1.8 PPM	3.2 PPM	NS	NS	NS	7	.4	1 kHz	100 Hz

* 1 KHz - 50 MHz † Continental Specialties Corp.

The specifications and prices included in the above chart are as published in manufacturer's literature and advertisements appearing in early 1979. DSI INSTRUMENTS only assumes responsibility for their own specifications.

100 HH... \$ 99.95 W/Battery Pack... \$119.95
500 HH... \$149.95 W/Battery Pack... \$169.95

Prices and/or specifications subject to change without notice or obligation.

These prices include factory installed rechargeable NiCad battery packs.




DSI INSTRUMENTS, INC.

7924 Ronson Road, Dept. G
San Diego, California 92111

CIRCLE NO. 15 ON FREE INFORMATION CARD

T-500 Ant. ... \$ 7.95
AC-9 Battery Eliminator ... \$ 7.95

TERMS: MC - VISA - AE - Check - M.O. - COD in U.S. Funds. Please add 10% to a maximum of \$10.00 for shipping, handling and insurance. Orders outside of USA & Canada, please add \$20.00 addition to cover air shipment. California residents add 6% Sales Tax.

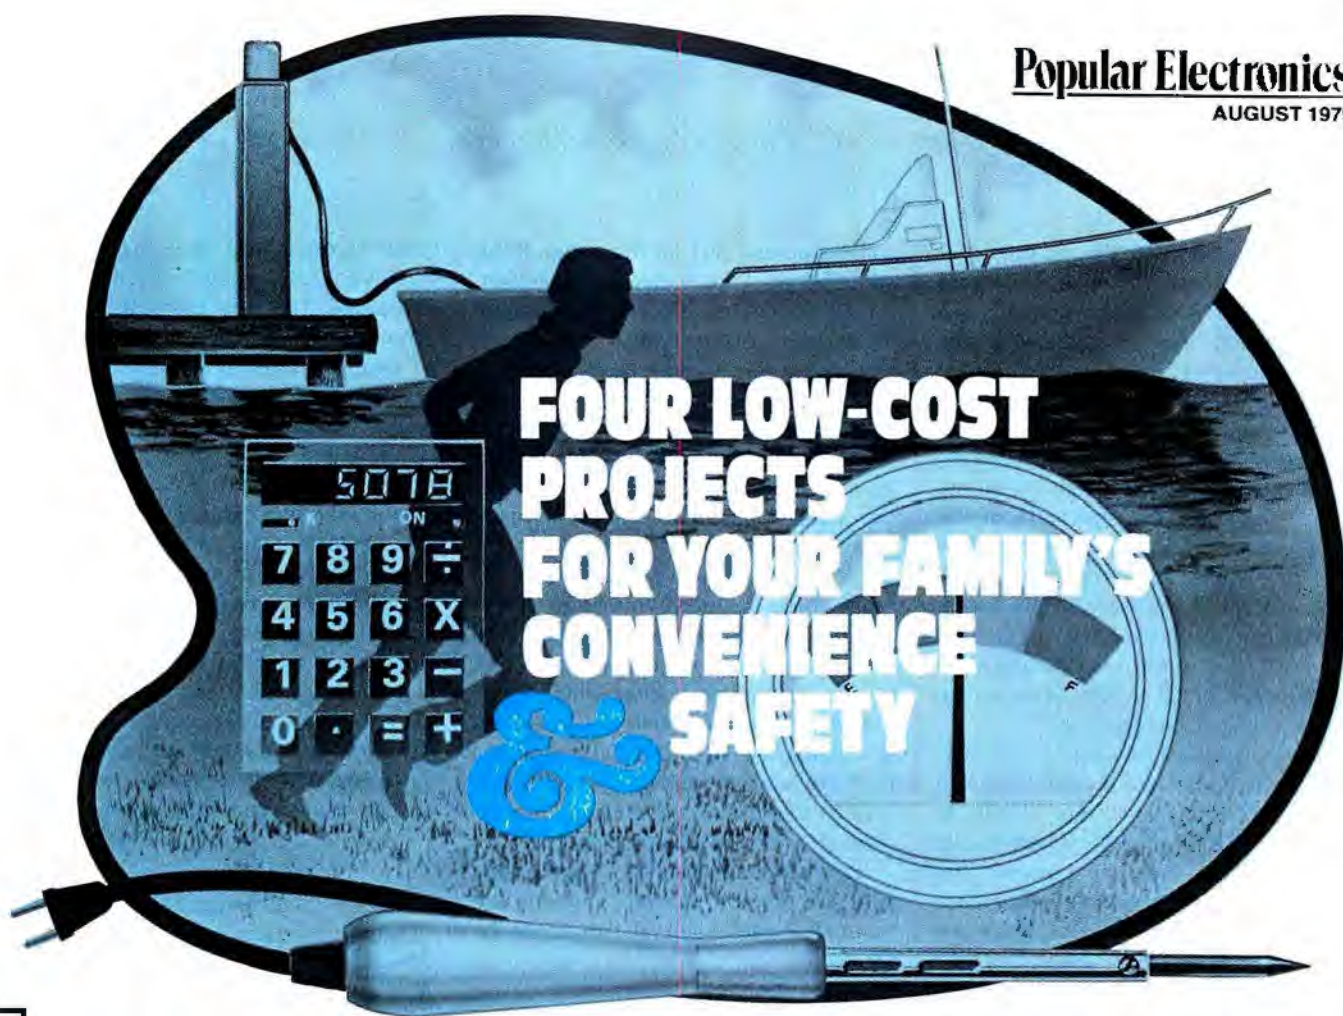

FOUR LOW-COST PROJECTS FOR YOUR FAMILY'S CONVENIENCE & SAFETY

Solid-state level-sensing switch for sump pumps

By Phillip Windolph

A FLOODED basement is a minor household disaster. That's why most homeowners whose basements are prone to flooding install sump pumps. Some, however, have discovered to their chagrin that the pump somehow fails to operate when it is most needed. In many instances of failure, the pump itself is actually in perfect working order. Rather, it is the water-detecting actuator switch that's the culprit, never sending a turn-on command to the pump.

Here's a simple, dependable circuit to replace the often-unreliable (usually mechanical) switch supplied as part of the pump assembly. It will automatically activate the pump when the water level reaches the level of a pump trigger probe. Once activated, the pump will re-

main energized until the water level falls below a keep-alive probe. If the pump fails or cannot keep the water in check, an optional alarm will sound as the water level reaches a trigger probe specifically for that purpose. The project can be powered either by batteries or the ac line. Inexpensive components are employed, most of which will be found in any well-stocked junk box.

About the Circuit. The Electronic Sump Pump Switch is shown schematically in the figure. Positive voltage from the power supply is applied to the common probe via resistors *R1* and *R2*. (This and all other probes are stiff wires or metal rods suspended above and extending to different levels in the sump.)

Replaces often-unreliable pump switch and sounds alert if water level continues to rise or pump isn't working



Low-cost Projects continued...

As can be seen in the figure, the COMMON probe extends almost to the bottom of the sump. Any water entering the sump comes into contact with this probe, but as yet nothing which would cause activation of the pump happens.

As the water level in the sump rises, the KEEP-ALIVE probe touches the water, but this still does not activate the pump. If the water reaches the level of the PUMP TRIGGER probe, current can flow from the positive supply voltage terminal through R1, R2, the water in the sump, R5 and finally into the base of Q3. This transistor then turns on and provides base current for Q4. When Q4 conducts, it energizes the coil of relay K1.

Once this relay is energized, the normally open contacts are closed and two things happen. Line current is able to flow through the coil of K2, a heavy-duty ac relay. Also, the path between the KEEP-ALIVE probe and the base of Q3 is completed. Energizing K2 provides line


voltage across S01 for the pump. If the sump pump is connected to the socket, it will be activated and will start to pump the water out of the sump.

As the water level drops, the conductive path provided by the water in the sump between the COMMON and PUMP TRIGGER probes will be interrupted. However, current will continue to reach the base of Q3 via the KEEP-ALIVE probe, R7, and one set of contacts of relay K1. Because this probe extends almost to the bottom of the sump, relays K1 and K2 remain energized (as does the pump motor) until practically all of the water has been evacuated. When the water level drops below the free end of the KEEP-ALIVE probe, Q3 is deprived of base current and is cut off. This causes Q4 to stop conducting, deenergizing K1, K2 and the pump motor.

If the pump motor fails or cannot cope with the amount of water entering the sump, the water level will rise above the

PUMP TRIGGER and KEEP ALIVE probes and eventually reach the ALARM TRIGGER probe. This probe is part of the optional alarm circuit and should be mounted near the top of the sump. Although the alarm circuit is independent of the pump controller, it is a valuable addition to the project.

The alarm circuit closely resembles that of the pump controller and operates in a similar manner. Water reaching the ALARM TRIGGER probe provides a path for current to reach the base of Q1. This transistor begins to conduct and provides base drive for Q2. Transistor Q2 then conducts and completes the circuit for audible alarm A1, which alerts the homeowner to the fact that water in the sump has risen to a critically high level. He can then try to get the pump working

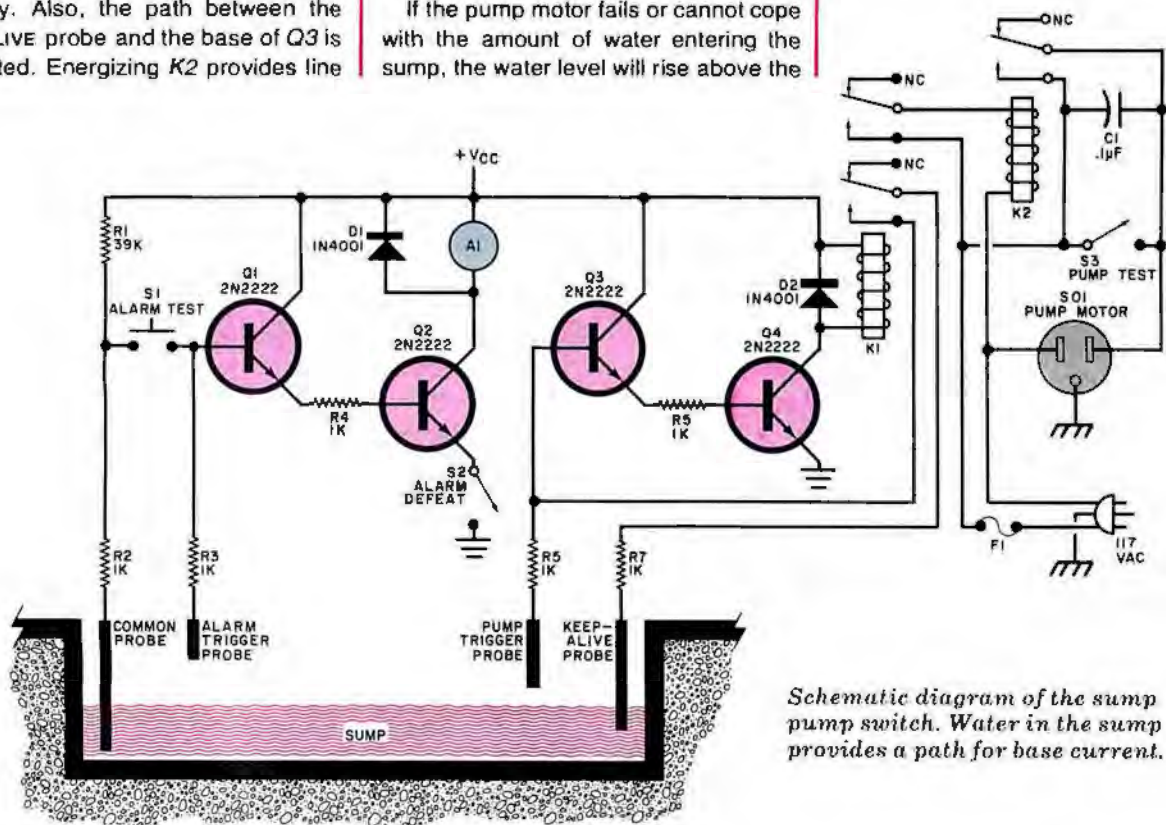

Schematic diagram of the sump pump switch. Water in the sump provides a path for base current.

PARTS LIST

A1—De-energized buzzer, bell, Sonalert™ or similar audible alarm*
C1—0.1-μF, 1000-volt disc ceramic
D1, D2—1N4001 rectifier
F1—Fast-blow fuse*
K1—De-energized relay*
K2—117-volt relay*
Q1 through Q4—2N2222 or similar npn switching transistor*

The following are 1/4-watt, 10% tolerance carbon-composition resistors:
R1—39,000 ohms*
R2 through R7—1000 ohms*
S1—Normally open pushbutton switch
S2—Miniature spst toggle switch
S3—Spst toggle switch*

S01—Ac power socket
Misc—Line-powered, regulated or battery dc supply*; suitable enclosure; barrier terminal strip; perforated board; fuseholder; line cord; metal rods or stiff, solid-conductor wire; hookup wire; solder; self-tapping and machine hardware, etc.

*See text.

or, if necessary, bail the water out of the sump manually.

Two switches are associated with the alarm circuit and one switch is included in the pump controller. These switches provide test facilities for the alarm and pump (S1 and S3, respectively) and the ability to silence the alarm (S2). The currents handled by S1 and S2 are relatively small, so miniature components can be used in these locations. Switch S3, however, as well as the contacts of K2 must be capable of handling the current demanded by the pump motor, so use heavy-duty components.

The author employed a solenoid/spring-type buzzer as his prototype's audible alarm. Diode D1 is connected across the buzzer to protect Q2 from inductive spikes generated by the buzzer. Other types of alarms can be used, some of which will not require the inclusion of D1. A Sonalert™ or similar audio oscillator will not necessitate diode protection for Q2, but an alarm bell will.

Which type of audible alarm you choose is largely a matter of personal preference and parts availability. Similarly, there is a great deal of leeway in the choice of components Q1 through Q4 and R1 through R7. General-purpose 2N2222 transistors are suggested in the parts list. Just about any low-power npn transistor is suitable for use as Q1 and Q3. Exactly which transistor types are acceptable for use as Q2 and Q4 depends on the audible alarm and relay (K1) used. If the current demand of either load is fairly low, say, 300 mA or less, a general-purpose component such as type 2N2222 can be used as a relay or alarm driver.

However, if a load draws more than 300 mA, a higher-power driver will have to be used. A good rule of thumb is to use a transistor with a collector current rating that is double the current required by the alarm or relay coil. The author employed a sensitive 6-volt relay for K1 (Sigma No. 70R4T-6DC), which permitted the use of a low-power npn driver. Diode D2 was included to protect the relay driver from inductive spikes.

The values specified for the fixed resistors (R1 through R7) are nominal ones. Substitutions can be made freely if you want to use components you have on hand. However, do not make the fixed resistances so low that they tax the base current ratings of the transistors employed in the project.

Either a line-powered or battery supply can be used for the project. The exact value of supply voltage is not critical

and can be chosen to accommodate a particular dc relay (K1). Practical supply voltages range from 6 to 15 volts. Although it is not necessary, voltage regulation is desirable in a line-powered supply. The widespread availability of voltage regulator ICs makes the inclusion of regulation simple and inexpensive.

If the alarm circuit is included in the project, battery power enjoys a significant advantage over a line-powered supply—it will still provide power to the project if the commercial power line is blacked out. Of course, if line power is not available, the pump motor will not be activated, even though K1 will be energized. The alarm circuit, however, will be activated if the water in the sump rises to the level of the ALARM TRIGGER probe. This will alert the homeowner that water is accumulating and had best be bailed out before any damage occurs. Also, when neither the alarm nor pump controller circuit is triggered, practically no current is drawn from the battery supply. If nonrechargeable batteries are used to power the project, long operational life can be expected.

Construction. The circuit is relatively simple, which suggests the use of perforated board and point-to-point wiring techniques. Remote mounting of the alarm and pump controller circuits will simplify any future servicing. If this is done, the circuit board, relays, switches and power supply can be housed in a suitable enclosure which can be installed at some convenient location.

A four-terminal barrier strip can be mounted on the control box for the leads running to the sump probes. These probes can be fashioned from either metal rods or lengths of solid No. 12 or No. 14 copper wire and should be mounted rigidly above the sump. The probes are of varying length, with the COMMON probe extending almost to the bottom of the sump, the KEEP-ALIVE probe extending almost as deeply, the PUMP TRIGGER probe reaching about halfway down, and the ALARM TRIGGER probe extending only a short distance into the sump. Suitable lengths of hookup wire should be soldered to the probes and routed to the barrier terminal strip on the control box.

When constructing the control box, be sure to observe the polarities of all semiconductors and, if a line-powered supply is built in, of electrolytic capacitors. Use the minimum amount of solder and heat consistent with making good connections. Take special care in wiring the

117-volt ac portions of the project so that no shock hazard is present.

Checkout and Installation. After the control box has been wired, connect short lengths of hookup wire to the barrier terminal strip. Remove a portion of the insulation from the free end of each wire. Next, fill a drinking glass or measuring cup with water and place the wire connected to the COMMON probe terminal into the water. Place the wire connected to the KEEP-ALIVE probe terminal into the water. (Keep these and all probes from touching each other to realistically simulate actual operation. No damage will occur, however, if the probes accidentally come into contact.) Activation of the pump controller, indicated by a click as the relays are energized, should not yet happen.

Now insert the wire connected to the PUMP TRIGGER probe terminal into the water. You should hear a click as the relays are energized. If desired, a lamp can be connected to power socket S01 and the line cord connected to the power line (assuming this has not yet been done). The lamp will then indicate that the relays are energized and that line power is reaching socket S01.

Remove the PUMP TRIGGER wire from the water. The relays should remain energized and no click should be heard. Then remove the KEEP ALIVE wire from the water. At this time, the relays should drop out and a click heard. Finally, insert the ALARM TRIGGER wire into the water. The alarm should sound and remain on until the wire is removed from the water.

Press the ALARM TEST pushbutton and keep it depressed. The alarm should sound and remain activated until the ALARM DEFEAT switch is opened. The operation of the PUMP TEST switch can be checked by closing it and observing whether the load connected to socket S01 receives line power.

Once it has been determined that the control box is functioning properly, a permanent installation can be made. Mount the control box at some convenient point and interconnect it with the sump probes and pump motor. Be sure to bypass the stock pump-activating switch as it is no longer needed. As a final check, you can quickly fill the sump with water. The alarm should sound until the pump has lowered the water level beyond the reach of the ALARM TRIGGER probe. The pump should remain on until the KEEP ALIVE probe is no longer immersed, at which point nearly all of the water will have been taken out. ◇

(Project continued overleaf)



Low-cost Projects continued...

2. Vehicle low-fuel indicator

Alarm sounds when level in vehicle fuel tank drops to a predetermined level

By Bradley Albing

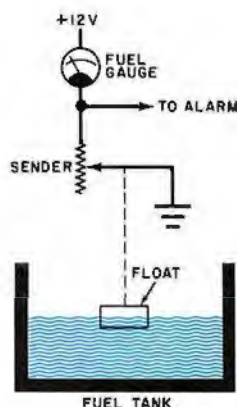


Fig. 1. Typical fuel-gauge circuit.

RUNNING out of gas can be an exasperating experience. The low-fuel indicator described here can help you avoid this situation. It will sound an alarm when the fuel level in your gas tank reaches a predetermined minimum. This level can be preset by a simple potentiometer adjustment.

Circuit Operation. In most vehicles, the fuel-level sensor is a float-controlled potentiometer (sender) wired in series with the dashboard-mounted fuel gauge (meter) and connected between the chassis and +12-volt line as shown in Fig. 1. As the fuel level changes, the resistance changes, making the meter indication change.

The voltage level thus generated across the fuel-level sensor can be tapped off (at the meter) and, as shown in Fig. 2, applied through a low-pass filter *R8-C4* so that the voltage across *C4* is the average across the sender. This low-pass filter also eliminates any rapid voltage fluctuations due to gasoline sloshing and a bouncing sensor float, or

voltage transients generated by the switching voltage regulator as used in some vehicles.

The *C4* voltage is applied to the non-inverting (+) input of comparator *IC1*, and rises with decreasing fuel in the tank. When this voltage exceeds the *R4*

preset voltage on the inverting (-) input, the output of *IC1* (pin 6) goes high.


This voltage (approximately 9 volts) is high enough to cause zener diode *D6* to conduct and turn on transistor *Q1*. When turned on, this transistor draws current through audible alarm *A1*, and turns on optional indicator *LED1*.

As long as the fuel level is low, the output of *IC1* remains high. To silence the alarm until the tank is filled, CANCEL switch *S1* is depressed to trigger *SCR1*. When triggered, the SCR brings the junction of *R5-D6* (the input to *Q1*) down to approximately 2.2 volts, which is not high enough to cause *D6* to conduct and activate the alarm circuit. Since the SCR is powered by dc, it will remain turned on as long as the *IC1* output is high (the fuel level is low).

As long as *SCR1* is conducting, there will be about 1.2 volts (two diode drops) across *D7* and *D8*, enough to turn on *Q2* and cause *LED2* to operate. This LED is a special type that incorporates a built-in flasher circuit that makes the LED flash at a 2.5-Hz rate as long as the LED is

(Continued on page 40)

Cable on author's prototype has connector for +12 volts, ground and tank sender unit.

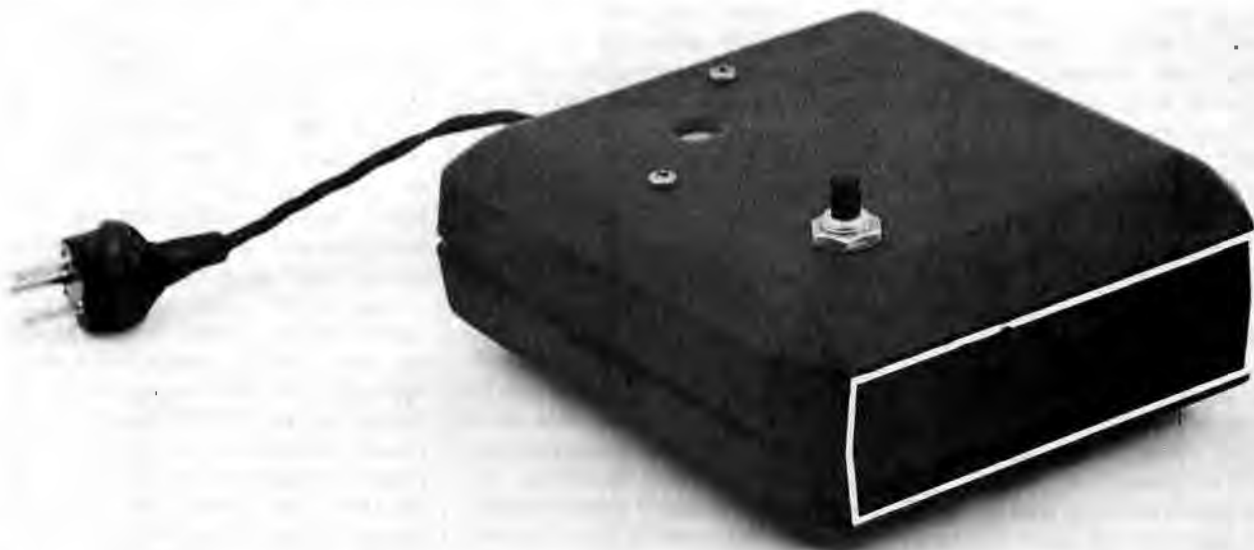

A1—Sonalert, buzzer or other 12-volt alarm
(Radio Shack 273-060 or similar)
C1,C2—100- μ F, 25-V aluminum electrolytic
C3,C5—0.1- μ F, 25-V disc or Mylar
C4—300- μ F, 15-V tantalum electrolytic
D1,D7,D8—1N914
D2—1N5742, 18-V, 400-mW zener
D3,D4,D9—1N751A, 5, 1-V, 400-mW zener
D5—1N4001
D6—1N5732, 6.8-V, 400-mW zener
IC1—3140E op amp
LED1—red LED
LED2—Litronix FRL-4403 flashing LED (Radio Shack 276-036)
Q1—2N3053 or similar
Q2—2N3904 or similar
The following are $\frac{1}{4}$ -watt, 10% tol. resistors.
R1,R11—100 ohms
R2—33 ohms
R3,R5,R12—470 ohms
R6—10 megohms
R7—470,000 ohms
R8—33,000 ohms
R9—330 ohms
R10—10,000 ohms
R13—820 ohms
R14—200 ohms
R4—25,000 ohm potentiometer
SCR1—2N5062
S1—normally open pushbutton switch
Misc.—Suitable enclosure (Radio Shack 270-285 or similar), interconnecting leads, mounting hardware
Note: The pc board (LF-2) is available for \$4.50 plus \$1 postage/handling from BFA Electronics, P.O.Box 212, Northfield, OH 44067. Ohio residents please add sales tax.

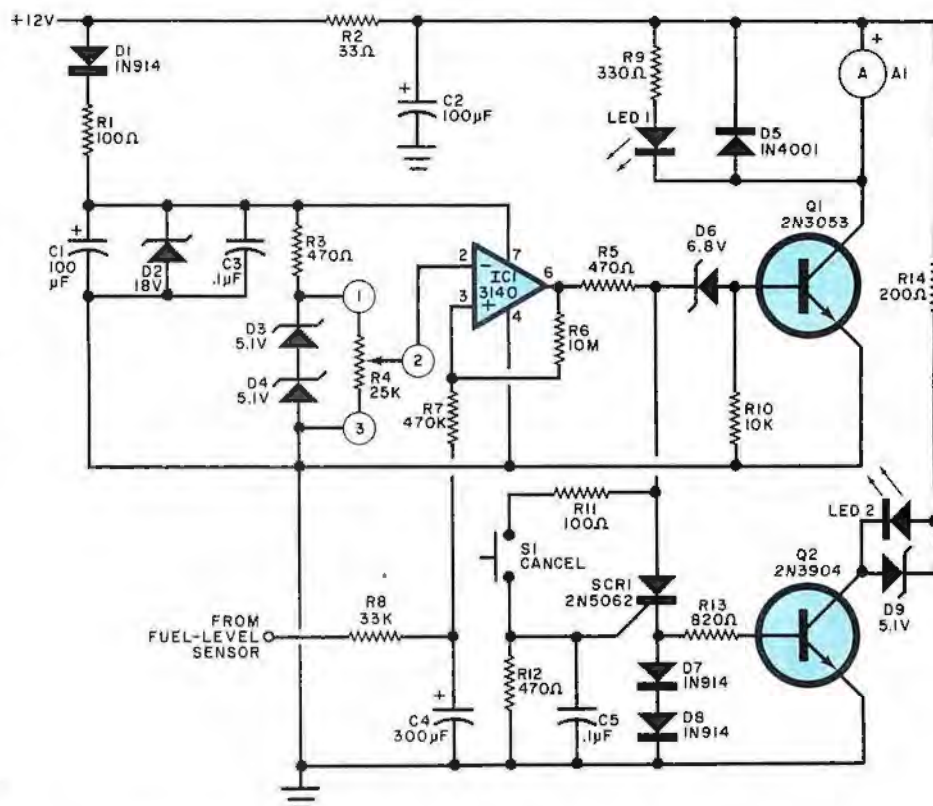


Fig. 2. Comparator IC1 turns on when fuel drops below some predetermined level, and sounds the alarm. The SCR circuit energizes a flashing LED during the Cancel mode.

Printed circuit board mounted in prototype with alarm and CANCEL switch on top.



At CIE, you get electronics career training from specialists.

If you're interested in learning how to fix air conditioners, service cars or install heating systems – talk to some other school. But if you're serious about electronics, come to CIE – The Electronics Specialists.

John E. Cunningham

**Special Projects Director
Cleveland Institute of Electronics**



My father always told me that there were certain advantages to putting all your eggs in one basket. "John," he said, "learn to do one important thing better than anyone else, and you'll always be in demand."

I believe he was right. Today is the age of specialization. And I think that's a very good thing.

Consider doctors. You wouldn't expect your family doctor to perform open heart surgery or your dentist to set a broken bone, either. Would you?

For these things, you'd want a specialist. And you'd trust him. Because you'd know if he weren't any good, he'd be out of business.

Why trust your education and career future to anything less than a specialist?

You shouldn't. And you certainly don't have to.

FACT: CIE is the largest independent home study school in the world that specializes exclusively in electronics.

We have to be good at it because we put all our eggs in one basket: electronics. If we hadn't done a good job, we'd have closed our doors long ago.

Specialists aren't for everyone.

I'll tell it to you straight. If you think electronics would make a nice hobby, check with other schools.

But if you think you have the cool—and want the training it takes—to make sure that a sound blackout during a prime time TV show will be corrected in seconds—then answer this ad. You'll probably find CIE has a course that's just right for you!

At CIE, we combine theory and practice. You learn the best of both.

Learning electronics is a lot more than memorizing a laundry list of facts about circuits and transistors. Electronics is interesting because it's based on some fairly recent scientific discoveries. It's built on ideas. So, look for a program that starts with ideas—and builds on them.

That's what happens with CIE's Auto-Programmed® Lessons. Each lesson uses world-famous "programmed learning" methods to teach you important principles. You explore them, master them completely... before you start to apply them!

But beyond theory, some of our courses come fully equipped with the electronics gear to actually let you perform hundreds of checking, testing and analyzing projects.

In fact, depending on the course you take, you'll do most of the basic things professionals do every day—things like servicing a beauty of a Zenith color TV set... or studying a variety of screen display patterns with the help of a color bar generator.

Plus there's a professional quality oscilloscope you build and use to "see" and "read" the characteristic waveform patterns of electronic equipment.

You work with experienced specialists.

When you send us a completed lesson, you can be sure it will be reviewed and graded by a trained electronics instructor, backed by a team of technical specialists. If you need specialized help, you get it fast... in writing from the faculty specialists best qualified to handle your question.

People who have known us a long time, think of us as the "FCC License School."

We don't mind. We have a fine record of preparing people to take... and pass... the government-administered FCC License exams. In fact, in continuing surveys nearly 4 out of 5 of our graduates who take

the exams get their Licenses. You may already know that an FCC License is needed for some careers in electronics—and it can be a valuable credential anytime.

Find out more! Mail this card for your FREE CATALOG today!

If the card is gone, cut out and mail the coupon.

I'll send you a copy of CIE's FREE school catalog, along with a complete package of independent home study information.

For your convenience, I'll try to arrange for a CIE representative to contact you to answer any questions you may have.

Remember, if you are serious about learning electronics... or building upon your present skills, your best bet is to go with the electronics specialists—CIE. Mail the card or coupon today or write CIE (and mention the name and date of this magazine), 1776 East 17th Street, Cleveland, Ohio 44114.



Patterns shown on TV and oscilloscope screens are simulated.

CIE Cleveland Institute of Electronics, Inc.

1776 East 17th Street, Cleveland, Ohio 44114

Accredited Member National Home Study Council

☐ **YES...** John, I want to learn from the specialists in electronics—CIE. Send me my FREE CIE school catalog—including details about troubleshooting courses—plus my FREE package of home study information. PE-95

Print Name _____

Address _____ Apt. _____

City _____

State _____ Zip _____

Age _____ Phone (area code) _____

Check box for G.I. Bill information: ☐ Veteran ☐ Active Duty

Mail today!



Low-cost Projects continued...

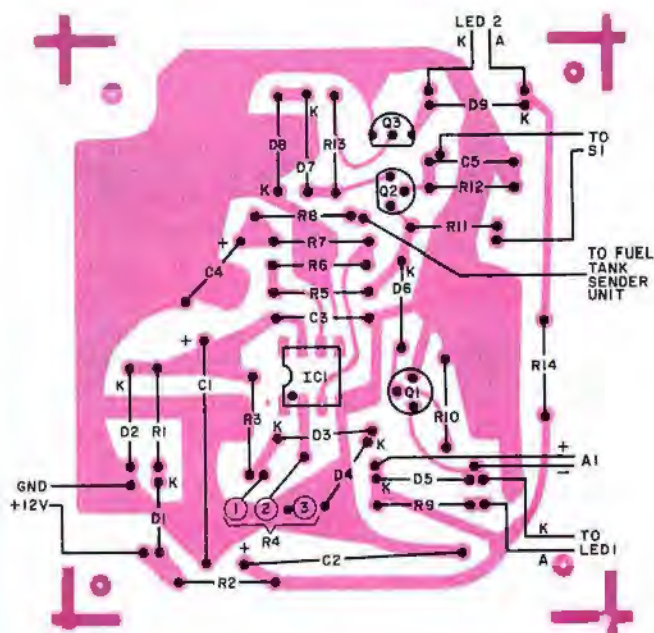


Fig. 3. Actual-size etching and drilling guide is shown at left. Component placement guide is above.

powered. The maximum voltage permitted across this special LED is 6 volts, hence the presence of 5.1-volt zener diode *D9*.

The incoming dc power line is noise decoupled by *R1*, *C1* and *C3*. Zener diode *D2* clamps any transients to a maximum of 18 volts while diode *D1* makes sure that the correct polarity is supplied to *IC1*. Filter *R2-C2* decouples the power line to the alarm and indicator circuit. Diode *D5* clamps any voltage spikes that may occur if an inductive load, such as a buzzer, is used as the alarm. Resistor *R6*, connected between the output of *IC1* (pin 6) and the noninverting (+) input, adds a small amount of positive feedback to give the comparator a little hysteresis and speed up the transition from low to high. This also reduces the likelihood of comparator oscillation.

Construction. The circuit may be constructed on perf board, Wire-Wrapped, or on a pc board such as that

shown in Fig. 3 along with the component installation.

The two LED indicators, CANCEL switch *S1*, level-select potentiometer *R4*, and the selected audible alarm are not mounted on the pc board.

The finished pc board can be mounted within a selected enclosure that will also mount the off-board components. Power can be derived from any +12-volt source that becomes active when the vehicle ignition key is operated. The ground can be any convenient metal element that is solidly connected to the vehicle chassis.

You will have to locate the dashboard end of the fuel sensor lead. Test this lead by measuring the voltage across it with various levels of fuel. Usually, the lower the fuel level, the higher the voltage. It is possible for this voltage to vary due to the action of the vehicle switching voltage regulator (if your vehicle uses one) so this must be considered.

If you have any doubt as to the type

and wiring of the fuel-level sensor in your vehicle, consult the vehicle repair manual.

Calibration. There are two ways to calibrate the system. The first is to wait until the fuel level is down to the selected low level, then adjust *R4* until the alarm sounds off.

The second approach is to disconnect the fuel gauge from its feed line to the fuel sender but leave the lead connected to the low-fuel alarm, then connect a resistor-substitution box between the fuel gauge and ground (as a substitute for the fuel sender). Adjust the value of the resistor until the fuel gauge indicates the desired level. Adjust *R4* to sound the alarm at that point. Disconnect the resistor box and replace the fuel sender line.

Once the fuel-level turn-on point has been determined, depress *S1* to silence the alarm. After the tank is filled, the alarm will be reset until the fuel level drops below the predetermined point. ◇

3.

Portable gas leak meter

By Cass Lewart

Ultra-sensitive instrument gives quantitative indication of natural gas, propane, fuel vapors, etc.

TOXIC and explosive gases are an ever-present danger in our modern society. They include natural gas, propane, fuel vapors, and invisible and odorless carbon monoxide.

The ultra-sensitive gas-leak detector presented here indicates the quantitative presence of these gases and enables one to track down and pinpoint the source of a gas leak by observing the unit's meter indication. Moreover, it is a portable, battery-powered model for use in boats, automobiles, at campsites, or in any other location where ac power is not available. (An ac-operated noxious gas detector with an audible alarm for preset gas levels was described in a project that appeared in POPULAR ELECTRONICS, August 1976.)

Circuit Operation. The gas sensor, GS1 in Fig. 1, consists of an electrically heated tin-oxide pellet that changes resistance when exposed to carbon monoxide, hydrogen, propane, alcohol, gasoline vapor, and other oxygen-reducing gases. Power for the circuit can be obtained from either six D cells, preferably rechargeable, connected in series or from an optional 9-volt battery eliminator. Regulator IC1 reduces the available 9-volt level to the 5 volts required by the circuit. Optional LED1 is a 9-volt power-on indicator.

Current from the regulator heats gas sensor GS1's semiconductor pellet. The sensor, R4, R7, and R8 are arranged in a bridge configuration. The null indicator consists of M1 and R6, while D1 and D2

serve as protection for M1. Overall circuit sensitivity is determined by the value of resistor R5, while S2 provides a BATT. TEST function.

Once the bridge is balanced, by NULL potentiometer R8, any change in the resistance of GS1 will create an unbalanced condition. When this occurs, the meter's pointer swings up-scale, by an amount proportional to the change in resistance of GS1.

Construction. With the exception of GS1, J1, M1, B1, R8, S1, and S2, the circuit can be assembled on a piece of perforated board. Select an enclosure large enough to accommodate the board and all off-board components, including B1 and its holder.

TIMEGLOW

NEW Digital Electronic Alarm Clock Systems and Clock/radio Modules in **RED, GREEN, YELLOW or BLUE**

Timeglow Company Ltd. — A company exclusively devoted to electronic time "movements"

Our prices are **LOWEST** because we specialize in time systems. All merchandise 100% guaranteed.

Now you can make a digital clock anywhere and in any color you want. Step by step instructions provided for systems. Only soldering iron and solder needed for easy assembly.

Functional Features TG 1001 and TG 1002

- Available in two display sizes: TG 1001, 6" (15mm) and TG 1002, 9" (23mm)
- High efficiency "RED", "GREEN" and "YELLOW" LED display
- User programmable 12/24 hr., 50/60 Hz. fixed or flashing color indicator
- On board alarm oscillator
- P.M., Colon, Alarm, "ON" LED indicators
- Multiple 9-minute snooze counter
- Direct drive LED display - no RFI
- 24 hr. alarm with ON/OFF control
- Display flashes after power has been interrupted for more than 2 seconds
- Insensitive to temporary loss of power (2 sec.)
- Easy to use slow, fast and seconds time set controls
- One finger 59-minute sleep counter setting
- Four display modes: TIME, SECONDS, ALARM and SLEEP
- Leading zero blanking
- External brightness control capability
- On board radio switch for clock radio applications
- Pulsating 2 kHz alarm tone output
- Operates from single winding transformer

Functional Features TG 1003

- User programmable 12 or 24 hr. and fixed or flashing color indicators
- Digit size 3" (7.5 mm) 4 digit fluorescent indicator panel
- Hours, minutes, seconds set controls
- Hours, minutes, seconds reset control with on the hour signal output (1024 Hz, 1 sec)
- Speaker included
- Operates from 12 VDC supply
- Lockout of time setting when display is "off" with display mode select
- Automotive display brightness control logic
- Crystal controlled oscillator (4.194304 MHz)
- Bright 0.3" vacuum fluorescent display filterable to Blue, Green and Yellow
- Projected against automotive voltage transients and battery reversal
- Convenient no roll over time setting controls at 1 Hz rate
- Leading zero blanking

Functional Features TG 1004

- LED 4" (10mm) 4 digit display
- AM, PM indicator (for 12 hr only), WK (wake time) and TM (sleep time) indicators
- 12 or 24 hr. available
- User programmable fixed or flashing color
- On board alarm oscillator
- Multiple 7 minute snooze counter
- 24 hr alarm with on/off control
- 59 minute sleep counter setting
- Convenient no roll over time setting controls at 1 Hz rate on hours and minutes
- Hours, minutes reset control with on the hour signal output
- Crystal controlled oscillator of 32.768 KHz
- Leading zero blanking

TG 1005 — A 12 or 24 hr clock module featuring 4 digit, 6" (15mm), vacuum fluorescent display filterable to Blue, Green or Yellow. Other features similar to TG 1001

Kit includes: Clock Module, Transformer, AC Line Cord, Switches, Speaker, Wire Nuts, and Connecting Wire.

Digital Electronic Alarm Clock System

(Complete kit except case)

QTY.	ITEM NUMBER	DESCRIPTION	**PRICE
	TG 1001 R12-S	LED Red, 12 hr., 6" (15mm) module	\$ 8.80
	TG 1001 R24-S	LED Red, 24 hr., 6" (15mm) module	11.50
	TG 1002 R12-S	LED Red, 12 hr., 9" (23mm) module	11.50
	TG 1002 R24-S	LED Red, 24 hr., 9" (23mm) module	13.00
	TG 1001 G12-S	LED Green, 12 hr., 6" (15mm) module	12.50
	TG 1001 G24-S	LED Green, 24 hr., 6" (15mm) module	14.00
	TG 1001 Y12-S	LED Yellow, 12 hr., 6" (15mm) module	12.50
	TG 1001 Y24-S	LED Yellow, 24 hr., 6" (15mm) module	14.00
	TG 1003 B-S	VF Blue, 12 or 24 hr., 3" (7.5mm) system V200C, Case switches & speaker inc.	19.95
	TG 1004 12-S	LED, 12 hr., 4" (10mm) system includes switches & speaker	19.95
	TG 1004 24-S	LED, 24 hr., 4" (10mm) system includes switches & speaker	19.95
	TG 1005 B-S	VF, 12 hr., 6" (15mm) module	12.50
	TG 1005 24-S	VF, 24 hr., 6" (15mm) module	14.00

Accessories

QTY.	ITEM NUMBER	DESCRIPTION	PRICE
	TG 100	Fast and slow set, seconds and alarm on/off switch	\$1.00
	TG 101	Snooze and alarm set switch	1.00
	TG 120 LE7 VF	Transformer 120V	2.00
	TG 220 LE7 VF	Transformer 220V	3.00
	TG 300	Speaker for alarm	1.00
	TG 400	Line cord 120V	1.00
	TG 401	Line cord 220V	2.00
	TG 500	Case for TG 1001 (3 1/2" x 2 1/4" x 2")	5.95

Clock (radio) Module only

QTY.	ITEM NUMBER	DESCRIPTION	**PRICE
	TG 1001 R12	LED Red, 12 hr., 6" (15mm) module	\$ 8.80
	TG 1001 R24	LED Red, 24 hr., 6" (15mm) module	11.50
	TG 1002 R12	LED Red, 12 hr., 9" (23mm) module	11.50
	TG 1002 R24	LED Red, 24 hr., 9" (23mm) module	13.00
	TG 1001 G12	LED Green, 12 hr., 6" (15mm) module	12.50
	TG 1001 G24	LED Green, 24 hr., 6" (15mm) module	14.00
	TG 1001 Y12	LED Yellow, 12 hr., 6" (15mm) module	12.50
	TG 1001 Y24	LED Yellow, 24 hr., 6" (15mm) module	14.00
	TG 1003	VF, 12 or 24 hr., 3" (7.5mm) speaker included (no switches, no case)	14.95
	TG 1004-12	LED, 12 hr., 4" (10mm) module	17.95
	TG 1004-24	LED, 24 hr., 4" (10mm) module	17.95
	TG 1005 12	VF, 12 hr., 6" (15mm) module	9.50
	TG 1005 24	VF, 24 hr., 6" (15mm) module	10.25

*For TG 1001 and TG 1002 modules and systems, only the 24 hr. modules have optional 12/24 hr. capability.
**After a 4 month introductory period, prices will increase starting Dec. 1, 1979, for systems with \$2.00 and for modules with \$1.50 per item. Accessories prices will remain the same.

Shipping and Handling Charges

For clock systems add \$2.50 per system.
For modules and accessories (except transformers) add \$1.00 per order.
For transformers add \$1.00 per transformer.
For orders over \$100.00 - no charge.
We ship worldwide - Add 20% for overseas orders.
Prices subject to change without notice.

To order, call or send check/money order with order form to: Microprom, Inc. 14320 Saratoga-Sunnyvale Road, Saratoga, CA 95070 U.S.A.
Tel. (408) 867-5659
TWX/TELEX: 910-560-9000 Microprom

Name _____	Phone _____
Address _____	City _____ State _____ Zip _____
Charge card number VISA/MC _____	Exp. Date _____
For MC include 4-digit Interbank number _____ Signature _____	

Total price of items checked above _____
Calif. residents add 6% sales tax _____
Shipping & handling charges _____
Total check or money order _____

OEM customers: Large discounts available.

CIRCLE NO. 36 ON FREE INFORMATION CARD



Low-cost Projects continued...

Mount the meter movement on one side of the enclosure's front panel, the remaining off-board components (except B1 and J1) on the other side of the panel. The battery holder and optional battery-eliminator/charger jack J1 are best mounted on the rear wall of the en-

er, set S1 to ON and S2 to BATT. TEST, and make a note of the point on the meter's scale at which the pointer comes to rest. Turn off the power and carefully remove the cover from the meter's face. Use a felt marker to identify the battery-test point on the meter's scale.

S2 to RUN and, in a neutral atmosphere, adjust NULL control R8 until the meter indicates zero. Now, place a drop of alcohol or gasoline on a finger and approach the sensor. The meter pointer should swing up-scale. Move the finger away from the sensor; it will take a min-

PARTS LIST

- B1—Six D cells in series
 D1, D2—Germanium diode (1N34A or similar)
 GS1—Model 812 gas sensor
 IC1—5-volt regulator (Radio Shack No. 276-1770 or similar)
 J1—Normally closed miniature phone jack (Radio Shack No. 274-281 or similar)
 LED1—Red light emitting diode
 M1—50- μ A meter (Radio Shack No. 22-051; No substitute)
 R1—1000-ohm, $\frac{1}{2}$ -W, 10% resistor
 R2—22,000-ohm, $\frac{1}{2}$ -W, 10% resistor
 R3, R7—4700-ohm, $\frac{1}{2}$ -W, 10% resistor
 R4—15,000-ohm, $\frac{1}{2}$ -W, 10% resistor
 R5—2700-ohm, $\frac{1}{2}$ -W, 10% resistor
 R6—2200-ohm, $\frac{1}{2}$ -W, 10% resistor
 R8—10,000-ohm linear potentiometer
 S1—Spst switch
 S2—Dpdt switch
 Misc.—7-pin miniature tube socket; battery holder; enclosure; 9-volt dc calculator-type ac adapter (optional); machine hardware; hookup wire; solder, etc.
 *Available for \$7.50 postpaid from Southwest Technical Products Dept., PE-2, 219 W. Rhapsody, San Antonio, TX 78216

closure. If desired, GS1 can be mounted either directly on the front panel or in a separate housing, the latter fitted with a cable to connect it to the main enclosure. The sensor itself takes a miniature 7-pin tube socket.

After the project is assembled, install a fresh set of D cells in the battery hold-

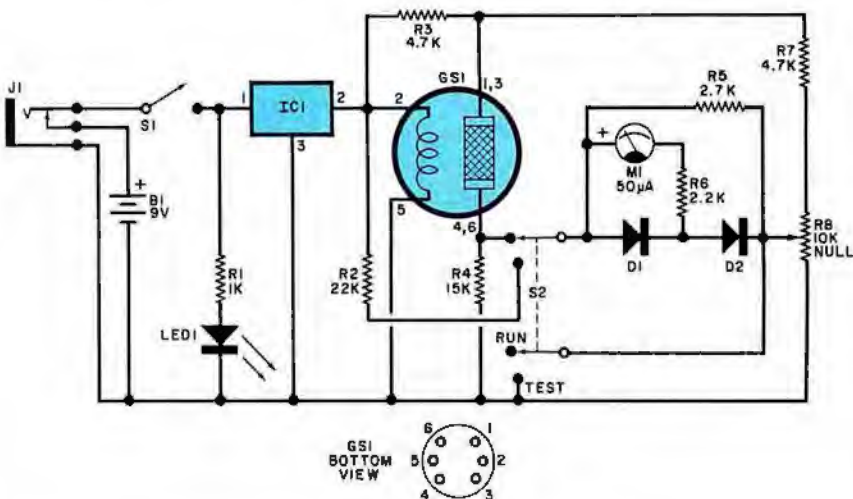


Fig. 1. The gas sensor forms one arm of a Wheatstone bridge. Pins 1, 2 and 3 can be interchanged with pins 4, 5 and 6. Once bridge is balanced by R8, a change in resistance of GS1 will cause meter pointer to swing up-scale.

Operation. Set S1 to ON and allow the sensor to heat up for about two minutes. Set S2 to BATT. TEST and check that sufficient voltage is available from the battery. (A set of fresh D cells will last about 20 hours. An external 9-volt battery-eliminator/charger can be used.)

After the sensor has warmed up, set

ule or so for the sensor to settle back for the next measurement. Readjustment of R8 may be necessary occasionally. If setting time is too long, change R7 to 1000 ohms.

When looking for a gas leak, note locations where the meter swings up-scale to narrow down the location. ◇

4. Electronic pedometer for joggers

By Andrew A. Modla

How to convert a calculator into a pedometer to record distance covered while walking or jogging.

AN INEXPENSIVE pocket calculator can be converted to operate as an electronic pedometer to keep an ongoing tally of the number of steps taken while walking and jogging. Then, with a

simple conversion, you can use the calculator to determine the number of yards, meters, miles, or kilometers travelled. Although the conversion described here is "hard wired" into the cal-

culator, you sacrifice none of the calculator's basic built-in capability.

Calculator Conversion. The first thing you must do is determine whether

Order **SKIING** and get a **FREE** Olympic Ski Program!

Skiing is proud to have been named to produce the Official Program for the 1980 Lake Placid Olympics. This program, which will sell for \$1 at the Olympics, will be reprinted as part of the February 1980 issue of Skiing. Order now to get this great FREE bonus!

☐ One year (7 issues) for \$5.99. That's 33% off the regular subscription rate of \$8.98.

☐ Two years for \$11. ☐ Three years for \$15.

Mr.
Mrs.
Ms. _____
(please print full name) PE 5 X 364

Address _____ Apt. _____

City _____

State _____ Zip _____

CHECK ONE: ☐ Payment enclosed. ☐ Bill me later.

Foreign postage: Add \$3 a year for Canada. Add \$5 a year (cash payment in U.S. currency only) for other countries outside U.S. and possessions. First issue shipped, in season, 30 to 60 days from receipt of order

59006 ☐ Send me 1 year of
Popular Electronics for \$8.97

**SUBSCRIBE
TODAY
PRICES GO UP
NEXT MONTH!**



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 909 BOULDER COLORADO

POSTAGE WILL BE PAID BY ADDRESSEE

SKIING

P.O. Box 2770
Boulder, Colorado 80321



or not your calculator has a built-in constant function. To do this, press CLEAR, 1, +, 1, =, =. If your calculator has the necessary constant function, the display should read 3 and should increment by 1 for each additional operation of the = key. Having established the fact that your calculator does indeed have the constant function, you can proceed with the conversion.


Conversion of the calculator consists in simply wiring a foot-operated switch across the = key. First, carefully open the calculator's case and locate the contacts for the = key. Then solder a 5' (1.5-meter) or so length of 26-gauge flexible stranded wire to each = switch contact. Insulate the soldered connections with a layer of electrical tape.

Now, test your hookups in the following manner. Turn on the calculator and key in 1, +, 1. Touch together and separate the free ends of the wires two times. With the first touch, the display should read 2 and with the second, 3. If the test checks out properly, turn off the calculator and reassemble it, routing the wires out through the side of the case. If necessary, use a sharp knife to cut a slot to allow the wires to exit the case. No other modification is necessary.

Footswitch Fabrication. As shown in the drawing, the footswitch is fabricated from a commercially available "air-pillow" foam insole. Begin by cutting a 1" (25.4-cm) square away from the center of the heel area of the insole. Cement a square of copper-coated Mylar or any other flexible conductive material over the cutout on both sides of the insole, conductive surfaces face-to-face.

Solder the free ends of the flexible wires from the calculator to the conductive material. Then cover the "switch" assembly with duct or other durable tape to keep out dirt and moisture.

Slide the insole into your shoe and put on the shoe. Turn on the calculator and



Place copper foil on each side of insole hole and insulate with tape.


key in 1, +, 1. Now, as you walk around, the display should read 2, then 3, then 4, etc., as you successively put weight on the switch shoe with each step. If you do not obtain these results, turn off the cal-

culator and carefully check out the switch arrangement.

Determining Distance. Every time you use the pedometer, you must first key in 1, +, 1. Thereafter, the calculator increments the display by 1 for each step taken by the shoe in which the switch is installed. To determine how far you have run or walked, you must find out how many steps you take in a given measured distance (mile, kilometer, etc.). You must, therefore, measure off the "control" distance and walk or run it to determine how many steps are required to cover the course.

Let us assume you wish to know how many miles you have walked and have previously determined that it takes you 1056 steps to walk a mile. (Note that a step is two strides. If the switch is in your right shoe, a step is completed every time you set down your right foot.) Now, subtract 1 from the total displayed by the calculator. This is necessary because the first step you take will register 2. If we assume you stopped at 7200 steps, simply divide this number by 1056, your "control" number, using the calculator to obtain the number of miles walked. Therefore, $7200/1056 = 6.82$ miles. ◇

NEW!

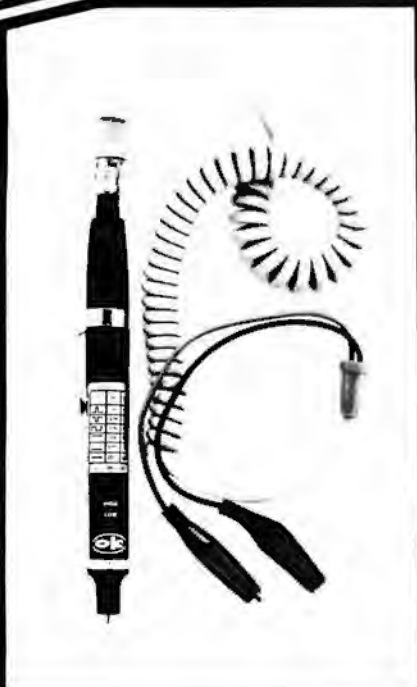

PRB-1 DIGITAL LOGIC PROBE

Compatible with DTL, TTL, CMOS, MOS and Microprocessors using a 4 to 15V power supply. Thresholds automatically programmed. Automatic resetting memory. No adjustment required. Visual indication of logic levels, using LED's to show high, low, bad level or open circuit logic and pulses. Highly sophisticated, shirt pocket portable (protective tip cap and removable coil cord).


- DC to > 50 MHz
- 10 Nsec. pulse response
- 120 K Ω impedance
- Automatic pulse stretching to 50 Msec.
- Automatic resetting memory
- Open circuit detection
- Automatic threshold resetting
- Compatible with all logic families 4-15 VDC
- Range extended to 15-25 VDC with optional PA-1 adapter
- Supply O.V.P. to ± 70 VDC
- No switches/no calibration

\$36⁹⁵*

* ADD \$2.00 FOR SHIPPING
(N. Y. CITY AND STATE RESIDENTS ADD TAX)

OK MACHINE & TOOL CORPORATION

3455 Conner St., Bronx, N.Y. 10475 (212) 994-6600 / Telex 125091

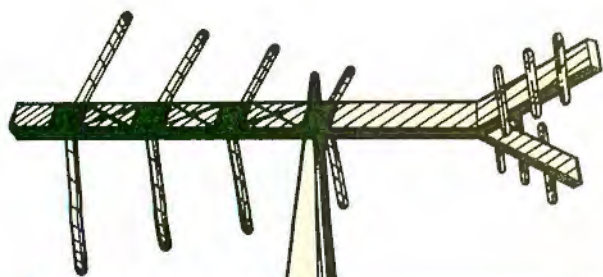

BY ROBERT GROVE


Make-it-yourself
antenna
improves reception
of
public services

GOOD RADIO reception depends as much on a good antenna as it does on a "hot" radio receiver. This is especially true with modern public-safety-band vhf/uhf scanning monitors, which almost invariably have high sensitivities in the range of 0.5 μ V or better. Aside from the usual whip antenna supplied with the scanning monitor, there are few commercially made antennas available for working vhf and uhf.

Fortunately, there is an alternative to a commercially made vhf/uhf antenna. A standard TV antenna can be "tailored" to provide excellent reception on the public safety bands. In this article, we will describe how this can be done and give you some idea of how the modified TV antenna stacks up against a popular high-performance discone antenna.

Antenna Theory. The standard whip antenna supplied with scanning monitors is generally adequate for city-wide reception of repeaters and base stations. However, when an external antenna is connected to the scanner to improve weak-signal reception, *all* signal

**SCANNER
BEAM
PINPOINTS
THE
ACTION!**

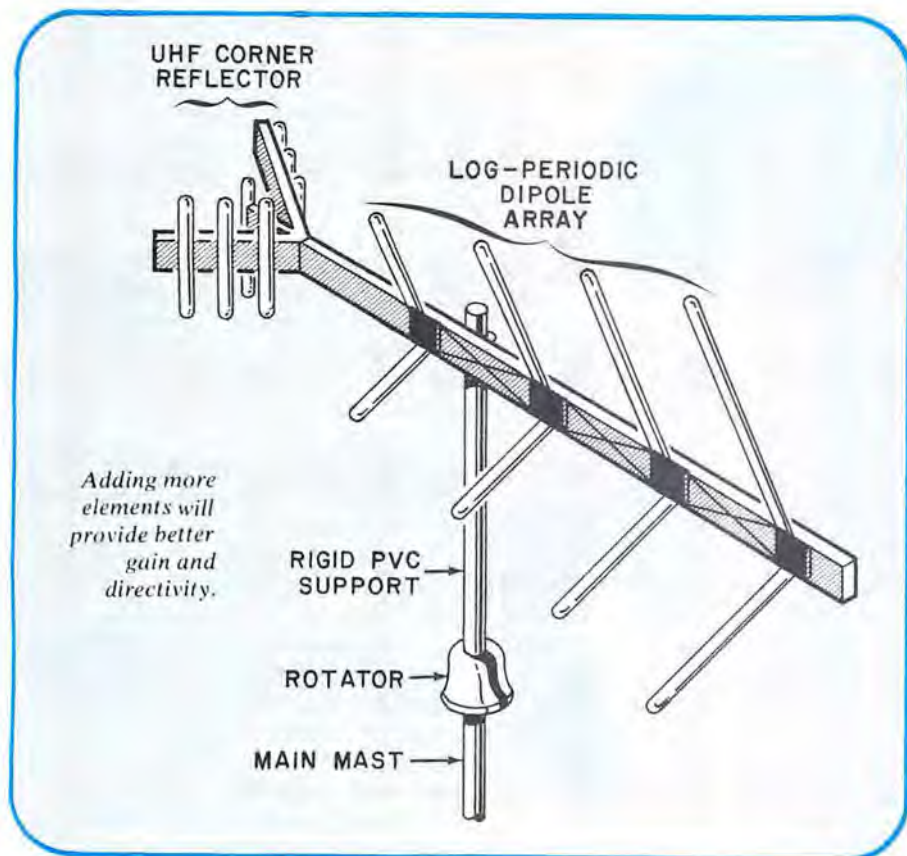

levels increase dramatically—including the levels of local signals. This can lead to problems. The most serious forms of scanning monitor interference are front-end overloading and intermodulation distortion, recognized by their frequent recurrence throughout the tuning range of the receiver. Images from aircraft communication and FM and TV signals that pop up in the middle of the public safety bands are another problem.

The problems that plague the public-safety-band listener are especially severe in metropolitan areas. The problem is compounded with the use of omnidirectional ground-plane antennas that respond equally well in all directions. What is really needed to maximize reception is a beam antenna with high forward gain and greatly limited side and rear gain. Such an antenna can be aimed at the transmitting source to zero in on that single signal to the virtual exclusion of other signals that can interfere with and mask the desired signal.

A few modifications to a low-cost TV antenna can produce an excellent beam antenna for vhf/uhf public-safety-band monitoring. We modified a Radio Shack "Super Color Special" (similar to the Model VU-90) antenna for our purposes. The results we obtained were so satisfactory that no further experimentation was necessary.

The TV antenna employs a log-periodic design in which every element is cross-connected to the feed line. The antenna is actually a series of center-fed dipoles, each slightly different in length to resonate at a slightly different frequency. The dipoles are connected to a common feedline. The response of the elements is related to the logarithm of the frequency; hence, the name log-periodic dipole array.

Electrically, elements that are not resonant at the frequency to which a receiver is tuned at any given moment behave like directors and reflectors. This endows the antenna array with both directivity and gain. The elements of a log-periodic antenna are incrementally shortened from the longest wavelength at the lowest frequency to the shortest wavelength at the highest frequency, which gives the antenna a characteristic V-shaped outline.

Each dipole is used at two frequencies—its resonant half-wave ($\lambda/2$) frequency and its three-half-wave ($3\lambda/2$) frequency. Hence, the longest element performs on 140 and 420 MHz, while the shortest element performs on 174 and 522 MHz. Also, because of the large diameter of the elements, compared to their length, the dipoles are very broad-band. This makes the modified antenna usable over a range from well below 130

to beyond 174 MHz in its $\lambda/2$ mode and from below 400 to beyond 550 MHz in its $3\lambda/2$ mode.

With the antenna erected, you will note that its elements are angled forward. This is done to merge the front lobes of the characteristic cloverleaf pattern that occurs on any $3\lambda/2$ dipole. The result is that the directivity of the antenna is considerably increased.

When used for TV only applications, the Radio Shack Super Color Special (as well as the Model VU-90) antenna offers an average gain of 4 to 6 dB (about 1 S unit) over a single dipole. Its front-to-back ratio is around 12 dB. Antennas with more elements will provide better gain and directivity figures.

Because the feed impedance for the antenna is approximately 300 ohms or less, a standard 4:1 TV Balun matching transformer is required between the antenna and the coaxial line you will be using. You need not concern yourself about the impedance of the feed line; either 50- or 75-ohm coax will work fine. For cable runs in excess of 50' (15.2 m), use RG-8/U foam dielectric coax. Although new dry 300-ohm twin-lead feed cable is low in losses, when it gets old, wet, and cracked, it causes more problems than it is worth. It is for this reason that coaxial cable is recommended industry-wide for two-way radio communication and commercial TV signal distribution systems.

Modification. Referring to the drawing, saw off the entire boom section that contains the 6" (15.2-cm) elements in front of the corner reflector. Be careful to avoid damaging the longer element closest to the reflector (this element is connected to the antenna's cross-feed system) or any of the reflector elements.

Next, cut the longest pair of angled elements to a length of 20" (50.8 cm) on each side of the boom. This 40" (101.6-cm) dipole is now cut for 140 and 420 MHz. Now, cut the shortest pair of angled elements to 16" (40.6 cm) on each side of the boom. This 32" (81.2-cm) dipole is now cut for 170 and 510 MHz.

Once the longest and shortest elements are trimmed to size, the remaining elements can be proportionately trimmed so that the outline of the antenna will have a characteristic V shape. You simply place a straightedge on each side of the antenna so that it touches the extreme ends of the cut elements and locate the cut points for the remaining elements. In the case of the Super Color Special and Model VU-90 antennas, the



Eye-level Weight Watcher

Separate digital readout puts your exact weight right before your eyes.

Your present scale gives you a number for every five pounds - and a line for the pounds in between. To make matters worse, the needle's at your feet.

Our scale puts your weight where your eyes are—in bold, red, easy-to-read numbers. It's marvelous! You step on the scale and your weight's right there. A visual record of the pounds you shed.

The readout unit mounts with either self-adhesive clips or screws. The color's soft white. The physical size of the scale unit is 10.5" x 10.5" x 2.5" and the digital readout unit is 4.75" x 3" x 1.25". Try it on a 15-day money back guarantee. Call toll free to charge it to any national credit card or send your check for \$49.95 plus \$5.50 shipping and handling to Douglas Dunhill, (Ill. residents add sales tax.) Complete with four AA batteries. Watching your weight's never been easier or as nice.

**Call Toll-Free
800-621-5554**

Illinois residents please call 800-972-5858
(In operation 24 hours, 7 days a week)



- Computer controlled electronic accuracy
- Automatically adjusts to zero
- 300 lb. capacity
- A fraction of the price of doctor-type pedestal scales without a digital readout

Douglas Dunhill
INC. AFFORDABLE QUALITY

Dept. 53-2378
Ten Douglas Dunhill Drive, Oak Forest, IL 60452
© Douglas Dunhill Inc. 1979



third and second longest elements will be 17" (43.2-cm) and 18" (45.4-cm) long, respectively, on each side of the log periodic array's boom.

Trim the longer corner reflector elements so that each of them is 16" long. Then lift the antenna to locate its new center of balance. Drill two new 1/4" (6.35-mm) holes, properly spaced, through the boom to accommodate the U bolt that fastens the antenna to its mast. Make certain that these holes are drilled to permit the antenna to be oriented so that its elements point up and down after mast mounting. Also, make certain that the U-bolt hardware does not touch the aluminum wire that cross-connects the elements.

Mount the antenna on a 36" (0.91-m) length of 1 1/4" (31.8-mm) outer-diameter rigid PVC pipe. Do not substitute a metal pipe because it will interfere with the signal path. The metal mast should be at least $\lambda/4$ away from the longest antenna element. (Rigid PVC pipe can be obtained from any building supply house and many hardware stores.)

Mount the antenna and PVC pipe support on a rotator, following the cable-routing instructions faithfully. Connect the Balun transformer to the antenna and the coax feed line to the Balun. Then coat the connections with silicone adhesive to weatherproof them.

How It Performs. We made comparison checks between the modified TV antenna and an excellent commercially available vhf/uhf discone monitor antenna. Signals that were barely readable on vhf with the discone antenna came in substantially stronger with the modified beam antenna. More important was the fact that signals from the back of the antenna were noticeably reduced and those off to the sides were deeply attenuated with the beam, all of which contribute to a reduction in interference and an overall improvement in reception. The modified beam performed even better on uhf than it did on vhf. Signals improved from "barely-discernable" to "full-quieting."

Our experience with the modified beam makes it clear that this antenna is an excellent choice for listeners who are plagued by strong nearby transmitters and experience weak incoming signals. The modified beam even has the added advantage that it works well on the 2-meter amateur radio band; just be careful to avoid pumping more than a few watts into the Balun to avoid overheating. Happy listening. ◇

SIMPLE TRS-80 PROGRAMS SOLVE ELECTRONICS CALCULATIONS

BY ROY BABYLON

THE FOLLOWING programs were designed to be run on a Level-1 TRS-80 microcomputer having 4K of memory. All the programs are self-prompting when run and are also readily adaptable to any other BASIC. (The square-root subroutine can be eliminated if your particular BASIC has a built-in square-root function.)

Ohm's Law. This program, shown in Table 1, is fairly short and has no subroutines. Line 40 selects the unknown resistance, voltage, current or power. Lines 70 through 100 are used to deter-

mine the unknown resistance; lines 110 through 130 are for current, while lines 145 through 160 are used to determine the voltage. Once the current (I) and resistance (R) have been determined, line 295 displays the wattage.

Resonance. The program shown in Table 2 can determine frequency of a tuned circuit when C and L are known, or can determine either C or L if the desired resonant frequency and one of these two elements are known. The program will also determine the Q of a series or parallel tuned circuit, bandwidth

and/or the impedance. The square-root subroutine used in determining resonant frequency is called at line 220.

Inductive Formulas. Table 3 illustrates a program that will determine instantaneous voltage, inductance of a single-layer coil, inductive/resistive time constant, the values of series and/or parallel inductors, the Q of a coil, inductive reactance and impedance of an inductive/resistive circuit. The only subroutine used (square root) is called at line 720, with this subroutine residing at line 30000.

Table 1—Ohm's Law

```

15  CLS
20  P.T.(20); "OHM'S LAW FORMULAS"
30  P. "SELECT NUMBER FOR DESIRED FUNCTION"
40  IN. "RESISTANCE=R, CURRENT=C, VOLTAGE=V,
    POWER=P"; A
60  IF A=R, G.70
62  IF A=C, G.110
65  IF A=V, G.145
67  IF A=P, G.180
70  IN. "ENTER VOLTAGE IN VOLTS"; E
80  IN. "ENTER CURRENT IN AMPERES"; I
100 P. "THE RESISTANCE EQUALS"; E/I; " OHMS"
105  END
110 IN. "ENTER VOLTAGE IN VOLTS"; E
120 IN. "ENTER RESISTANCE IN OHMS"; R
130 P. "THE CURRENT IS EQUAL TO"; E/R; " AMPERES"
140  END
145 IN. "ENTER CURRENT IN AMPERES"; I
150 IN. "ENTER RESISTANCE IN OHMS"; R
160 P. "THE VOLTAGE IS "; I*R; " VOLTS WITH "; R; " OHMS
    AND "; I; " AMPERES"
170  END
180 IN. "ENTER MISSING VARIABLE R,I,E"; B
190 IF B=R, G.210
195 IF B=I, G.240
200 IF B=E, G.270
210 IN. "ENTER CURRENT (I)"; I
220 IN. "ENTER VOLTAGE (E)"; E
230 P=I*E
235  G.295
240 IN. "ENTER VOLTAGE (E)"; E
250 IN. "ENTER RESISTANCE (R)"; R
260 P=(E*E)/R
265  G.295
270 IN. "ENTER CURRENT (I)"; I
280 IN. "ENTER RESISTANCE (R)"; R
290 P=(I*I)*R
295 P. "THE POWER IS "; P; " WATTS"
300  END
    
```

Table 2—Resonance (Tuned Circuits)

```

5  CLS
10  P.T.(15); "VARIOUS FORMULAS
    ON RESONANT FREQUENCY"
20  P. "ENTER NUMBER OF DESIRED FUNCTION";
30  P. "RESONANT FREQUENCY (FO)          #1"
40  P. "UNKNOWN INDUCTANCE (L)           #2"
50  P. "UNKNOWN CAPACITOR (C)            #3"
60  P. "Q OF SERIES OR PARALLEL CIRCUIT (Q) #4"
70  P. "BANDWIDTH (BW)                   #5"
80  P. "IMPEDANCE, SERIES OR PARALLEL (Z) #6"
90  IN. "UNKNOWN FACTOR IS NUMBER "; U
100 IF U=1, G.170
110 IF U=2, G.240
120 IF U=3, G.280
130 IF U=4, G.320
140 IF U=5, G.360
150 IF U=6, G.520
170 IN. "ENTER VALUE OF INDUCTOR IN MILLIHENRIES"; L
180 IN. "ENTER VALUE OF CAPACITOR IN MICROFARADS"; C
210 X=(L/1E3)*(C/1E6)
220 GOS.30030
230 P. "THE RESONANT FREQUENCY IS "; 159/Y; " HERTZ"
235  END
240 IN. "ENTER RESONANT FREQUENCY (FO) DESIRED"; F
250 IN. "ENTER CAPACITOR VALUE IN MICROFARADS"; C
260 L=.0254/(F*F)*(C/1E6)
270 P. "THE INDUCTOR NEEDED IS "; L*1000; " MILLIHENRIES"
275  END
280 IN. "ENTER RESONANT FREQUENCY DESIRED "; F
290 IN. "ENTER INDUCTOR VALUE IN MILLIHENRIES "; L
300 C=.0254/(F*F)*(L/1E3)
310 P. "THE CAPACITOR NEEDED IS "; C*1E6; " MICROFARADS"
315  END
320 IN. "ENTER THE REACTANCE (XC OR XL) IN OHMS"; X
330 IN. "ENTER THE SERIES RESISTANCE IN OHMS"; R
340 P. "THE Q OF THE CIRCUIT IS "; X/R; " UNITS"
350  END
360 IN. "ENTER UNKNOWN, O=Q, FO=F, BW=B"; X
370 IF X=Q, G.400
    
```



```

380 IF X=F,G.440
390 IF X=B,G.480
400 IN."ENTER FO IN HERTZ";F
410 IN."ENTER BW (F2-F1) IN HERTZ";B
420 P."THE Q IS EQUAL TO ";F/B;" UNITS"
430 END
440 IN."ENTER THE Q OF THE CIRCUIT";Q
450 IN."ENTER THE BW (F2-F1) IN HERTZ";B
460 P."THE RESONANT FREQUENCY (FO)
    IS ";Q*B;" HERTZ"
470 END
480 IN."ENTER RESONANT FREQUENCY (FO) IN HERTZ";F
490 IN."ENTER THE Q VALUE";Q
500 P."THE BANDWIDTH IS ";F/Q;" HERTZ"
510 END
520 IN."ENTER VALUE OF INDUCTOR IN MILLIHENRIES";L
530 IN."ENTER FREQUENCY IN HERTZ";F
535 IN."ENTER RESISTOR VALUE IN OHMS";R
540 P."AT SERIES RESONANCE, XL AND XC CANCEL
    THEREFORE Z=";R
550 P="(6.28)*(F)*(L/1E3)
560 Q=P/R
570 P."THE PARALLEL IMPEDANCE IS EQUAL
    TO ";P*Q;" OHMS"
580 END
30000 END
30010 REM *SQUARE ROOT* INPUT X, OUTPUT Y
30020 REM ALSO USES W & Z INTERNALLY
30030 IF X=O T, Y=O:RET.
30040 IF X > O T, 30060
30050 P."ROOT OF NEGATIVE NUMBER?":STOP
30060 Y=X*.5:Z=O
30070 W=(X/Y-Y)*.5
30080 IF (W=O) + (W=Z) T, RET.
30090 Y=Y+W:Z=W:G.30070

```

Table 3—Inductive Formulas

2	CLS	
10	P."AFTER EACH SOLUTION, PRESS R. ENTER TO BEGIN."	
15	P.T.(15)"VARIOUS INDUCTIVE FORMULAS"	
20	P."ENTER THE NUMBER NEXT TO DESIRED FUNCTION"	
30	P."INSTANTANEOUS VOLTAGE	#1"
40	P."INDUCTANCE OF A SINGLE LAYER COIL	#2"
50	P."INDUCTIVE/RESISTIVE TIME CONSTANT	#3"
60	P."SERIES AND PARALLEL INDUCTORS	#4"
70	P."Q OF A COIL	#5"
80	P."INDUCTIVE REACTANCE (XL)	#6"
90	P."IMPEDANCE OF INDUCTIVE/RESISTIVE CIRCUIT	#7"
100	IN."FORMULA DESIRED";F	
110	IF F=1 G.160	
120	IF F=2 G.220	
130	IF F=3 G.280	
140	IF F=4 G.320	
144	IF F=5 G.570	
145	IF F=6 G.640	
146	IF F=7 G.690	
160	IN."ENTER VALUE OF INDUCTANCE IN HENRIES";L	
170	IN."ENTER CHANGE IN CURRENT (I2-I1) IN AMPS";I	
180	IN."ENTER CHANGE IN TIME (T2-T1) IN SECONDS";T	
190	E=L*(I/T)	
200	P."THE VOLTAGE DEVELOPED IS";E;"VOLTS"	
210	END	
220	IN."ENTER NUMBER OF TURNS";N	
230	IN."ENTER RADIUS OF COIL IN INCHES";R	
240	IN."ENTER LENGTH OF COIL IN INCHES";D	
250	L=(N*R)*(N*R)/(9*R)+(10*D)	
260	P."THE INDUCTANCE IS";L;"MICROHENRIES"	

```

270 END
280 IN."ENTER THE VALUE OF INDUCTANCE
    IN HENRIES";L
290 IN."ENTER THE VALUE OF RESISTANCE
    IN OHMS";R
300 T=L/R
310 P."THE TIME CONSTANT IS";T;"SECONDS"
315 END
320 IN."ENTER THE NUMBER OF INDUCTORS";B
330 IF B=2 G.360
340 IF B=3 G.420
350 IF B=4 G.490
360 IN."ENTER VALUE OF L1 IN HENRIES";A
370 IN."ENTER VALUE OF L2 IN HENRIES";B
380 C=A+B
390 P."THE TOTAL SERIES INDUCTANCE IS";C;"HENRIES"
400 D=(1/A)+(1/B)
405 P."THE TOTAL PARALLEL INDUCTANCE
    IS";1/D;"HENRIES"
410 END
420 IN."ENTER VALUE OF L1 IN HENRIES";A
430 IN."ENTER VALUE OF L2 IN HENRIES";B
440 IN."ENTER VALUE OF L3 IN HENRIES";C
450 D=(1/A)+(1/B)+(1/C)
460 P."THE TOTAL INDUCTANCE IN SERIES
    IS";A+B+C;"HENRIES"
470 P."THE TOTAL INDUCTANCE IN PARALLEL
    IS";1/D;"HENRIES"
480 END
490 IN."ENTER VALUE OF L1 IN HENRIES";A
500 IN."ENTER VALUE OF L2 IN HENRIES";B
510 IN."ENTER VALUE OF L3 IN HENRIES";C
520 IN."ENTER VALUE OF L4 IN HENRIES";D
530 E=(1/A)+(1/B)+(1/C)+(1/D)
550 P."THE TOTAL PARALLEL INDUCTANCE
    IS";1/E;"HENRIES"
540 P."THE TOTAL SERIES INDUCTANCE
    IS";A+B+C+D;"HENRIES"
555 END
570 IN."ENTER INDUCTOR VALUE IN HENRIES";L
580 IN."ENTER THE FREQUENCY IN HERTZ";H
590 IN."ENTER RESISTOR VALUE IN OHMS";R
600 X=6.28*H*L
610 Q=X/R
620 P."THE REACTANCE OF THE CIRCUIT
    IS";X;"OHMS WITH A Q OF";Q
630 END
640 IN."ENTER THE VALUE OF INDUCTOR IN
    MILLIHENRIES";L
650 IN."ENTER THE FREQUENCY IN HERTZ";H
660 X=(6.28)*(H)*(L/1000)
670 P."THE REACTANCE OF THE CIRCUIT IS";X;"OHMS"
680 END
690 IN."ENTER THE VALUE OF INDUCTIVE REACTANCE
    IN OHMS";P
700 IN."ENTER THE VALUE OF RESISTANCE
    IN OHMS";R
710 X=(P*P)+(R*R)
720 GOS 30030
730 P."THE IMPEDANCE OF THE CIRCUIT IS";Y;"OHMS"
740 END
30000 END
30010 REM *SQUARE ROOT* INPUT X, OUTPUT Y
30020 REM ALSO USES W AND Z INTERNALLY
30030 IF X=O T, Y=O:RET.
30040 IF X > O T, 30060
30050 P."ROOT OF A NEGATIVE NUMBER?":STOP
30060 Y=X*.5:Z=O
30070 W=(X/Y-Y)*.5
30080 IF (W=O) + (W=Z) T, RET.
30090 Y=Y+W:Z=W:G.30070

```




The Art of EQUALIZATION



*An expert tells how to "sweeten"
instruments and achieve
that special recorded "sound"*

BY ETHAN WINER

¶ A growing number of audio enthusiasts are using equalizers to shape a stereo system's frequency response, whether to "adjust" a room or for creative recording purposes.

¶ An equalizer is nothing more than a device to allow frequency response of an audio signal path to be adjusted in some way. Thus, conventional bass and treble controls qualify as charter members of the club. More often, however, the term implies equipment that is more complex and sophisticated, such as that used by a mixing engineer. Let's take a look at some of the reasons equalization (EQ) is useful and how its implementation has developed into a high art.

¶ Standard bass and treble tone controls are broadband devices that have greatest effect at the frequency extremes; that is, the highest highs and the lowest lows.

While this is fine for touching up reproduction, it is of virtually no help in correcting for narrowband colorations, which are often highly disturbing. For example, a peak in the response of an audio system in the low-to-middle treble region can produce a shrill or scratchy quality that a normal treble control cannot effectively tame. Turning down the control enough to eliminate the shrillness kills too much of the highest treble, robbing music of clarity and sparkle. Similarly, using a bass control to correct tubbiness or muddy bass response also falls short of success. Turning the control down to relieve such midbass exaggeration would simply remove the deepest frequencies so important to life-like reproduction, while perhaps still allowing some muddiness to persist. There's got to be a better way—and there is.


(continued overleaf)

Fig. 1. Layout of a typical front panel for an equalizer. Note that it has controls for treble, midrange, and bass as well as a 3-position low-cut filter.

Enter the Graphic Equalizer. The graphic equalizer has become very popular in recent years. It is called "graphic" because, as the front-panel sliders are adjusted, their positions give an approximate display of the resultant frequency response. Each of the five to ten or more frequency bands into which the audible spectrum is divided by these devices is adjustable via its own boost/cut control. Instead of broad adjustments of treble, bass, and maybe the midrange (presence), we now have independent control over the low bass, midbass and high bass, low midrange, etc.

If we attack that shrill midtreble emphasis with an octave-band graphic equalizer, we should be able, more or less, to correct for only the troublesome peak. We'll have to settle for "more or less" because it is highly unlikely that any response anomaly could correspond exactly to the adjustments of even a ten-band device. Therefore, many professional sound contractors, recording studios and audio enthusiasts seeking precise results use the even greater resolution afforded by $\frac{1}{3}$ -octave equalization. The $\frac{1}{3}$ -octave graphics usually have 27 or so bands, and can, when teamed up with the proper measuring equipment, be used to make just about any high-quality speaker system flat to within a dB or so over much of the audible range. But there's much more to EQ than simply correcting nonideal loudspeakers or listening rooms.

EQ In the Studio. Now, let's look at the professional recording studio with its abundant knobs, lights, and buttons. This is where the multiple original tracks are adjusted in level and equalized before being mixed together to comprise the final two-track product. The key phrase is "before being mixed." Whereas the home listener can alter the program only in its entirety, the recording engineer can—and must—equalize sounds picked up by each microphone separately. The tool of choice for this ap-

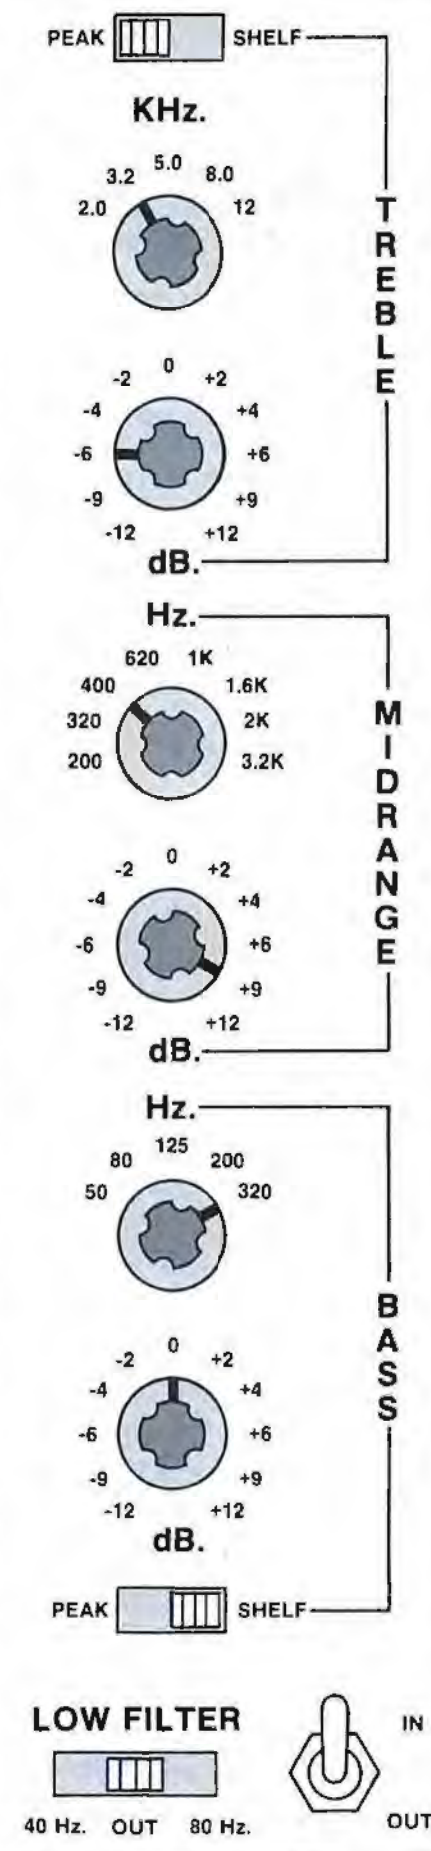

plication is yet another equalizer referred to by many as the "console type." Virtually all professional mixing consoles use this sort of device, with one available for each mike or line input. Additional equalizers are often devoted to echo and reverb lines.

A typical front panel for such an equalizer (Fig. 1) shows that we're back to the bass-mid-and-treble format. But there are no less than five different frequency choices for treble, eight for midrange, and another five for bass. In addition, a 3-position low-cut filter is provided, as is an in/out switch for instant comparison of "before" and "after." Here we have a device that can exercise control over fifteen different frequency ranges and also be made small enough to fit in quantity into a single mixing board. (A large console will have some 30 or more of these, so size is an important factor.) Though all 15 frequencies cannot be adjusted simultaneously as with the graphic, this rarely is needed in a "one-for-each-mike" situation. Besides, you can always "patch-in" a graphic if you absolutely have to.

The last control, the **PEAK/SHELF** switch, changes the basic shape of the response curve being created. This is shown in Fig. 2, where in both cases treble frequency has been set to 3.2 KHz and 12 dB of boost is applied. The upper curve represents the switch in the **PEAK** position while the lower curve shows a **SHELF**. Notice that, while the treble peak affects mainly the specified frequency, there is still some influence on nearby frequencies, whether boosting or cutting. In the **SHELF** position, the boost or cut reaches its maximum at that frequency and remains there for all higher frequencies. The same principle applies to the bass control. The boost or cut reaches maximum at the named frequency but instead continues downward thereafter. The midrange has no shelf capability, but more expensive consoles generally have a second, additional midrange control for added flexibility. Fig. 3 contains bass shelf cuts at four different frequencies. Fig. 4 illustrates the effect of varying the bandwidth of a midrange dip. Bandwidth? Well now we're talking about the "parametric equalizer," the most recent addition to the EQ machine family.

Parametric Power. In a sense, the parametric equalizer is the most powerful of the equalizer types, allowing continuous adjustment of all equalization parameters (hence the name). It is

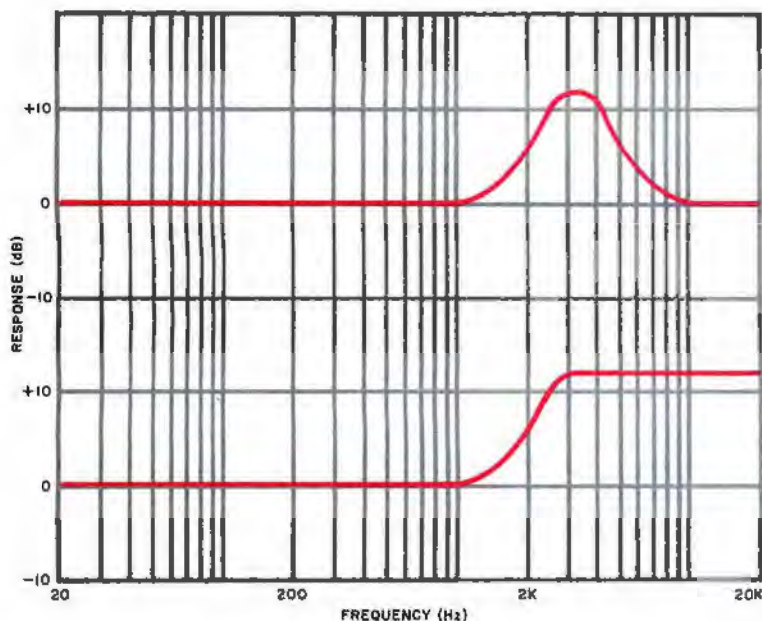


Fig. 2. The top switch in Fig. 1 changes the basic shape of the response as shown here to a peak (top) or shelf (bottom).

structured similarly to the console equalizer, but there are differences worth elaborating. First, and probably most important, all controls of a parametric are continuously adjustable. Potentiometers, rather than discrete, switch-related resistors, are employed as the tuning elements, allowing a choice of virtually any center frequency. Boost and cut controls are also continuous and typically offer a range of ± 20 dB, more than is characteristic of other equalizer types.

Another important difference is the inclusion of a bandwidth control. It was explained previously that in boosting or cutting a peak, the effect "spills over" to adjacent frequencies. How far away from the indicated center this influence

extends is determined by the setting of the bandwidth control. When set to NARROW, it allows only a small range of frequencies to be influenced. This is particularly useful for suppressing ringing or removing extraneous tones from, say, drums without changing the basic sound character. On the other side of the coin, this narrowband setting can be used to emphasize a single tone and can often effectively "purify" a muddy-sounding tom tom. Of course, this is not a substitute for proper tuning of the drums, but when all else fails. . . .

Except when dealing with drums and perhaps some tuned percussion instruments like triangles or cowbells, narrow-bandwidth boosts should usually be


avoided because unpleasant resonances or other bad effects may show up when the mix is heard on different speakers. In fact, most recording studios have alternate speaker systems available for making instant comparisons.

Broad-bandwidth settings accentuate a larger range of frequencies. Parametric equalizers are inherently peaking rather than shelving devices, but a wide setting can reasonably approximate a shelf. Do not confuse peaking with boosting, though. Peaking refers only to the shape of the curve, not to whether it is being boosted or attenuated.

All this newfound versatility, however, is not without some potential drawbacks. Probably the most obvious is the lack of precise repeatability. Since the operating controls are continuously variable, it may be difficult to recreate settings exactly to perhaps undo something you later don't like. Another factor is noise. Parametric equalizer designs generally use more op amps per frequency band than do graphic and console types. This means that cumulative noise can be more of a problem, especially when large amounts of boost are used. Distortion can build up in a similar fashion, though the latest high-slew, low-noise FET input op amps are bringing both of these factors under better control. Still, most commercially available units have a switch to bypass each band or section if it's not needed.

While studios have not unanimously traded in all their old equalizers for parametrics, many have added at least one or two. And some of the newer mixing boards are showing up with equalizers having a sweepable midrange band or a two-position switch for sharp or broad peak shape selection. So a few of the

Fig. 3. Response curves show changes for bass shelf cuts at four different frequencies.

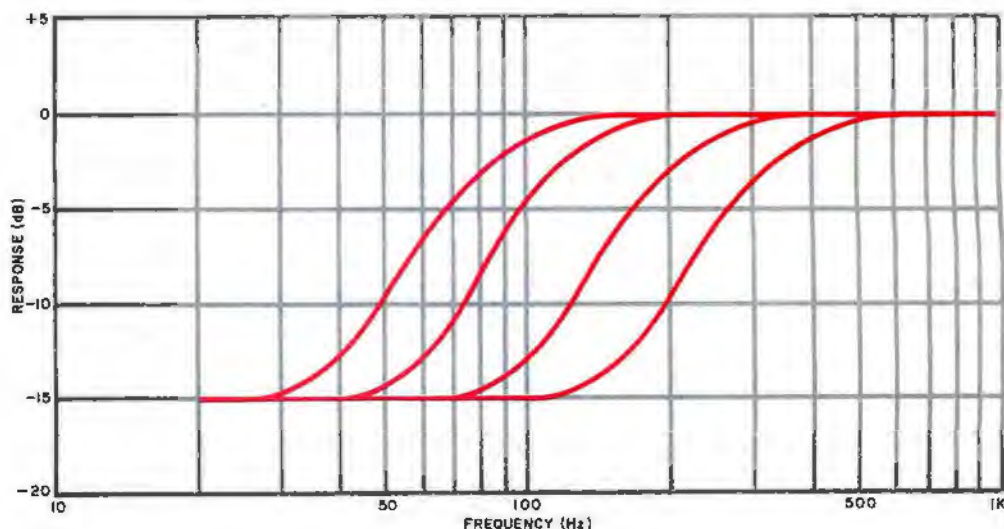

conveniences are added without having to go to a full parametric design.

Now that we've looked at the different types of devices and know how they operate, how can we use EQ to best advantage? When and how would a professional recording engineer use it? Well, first we should note that equalization can be used in two basic ways: as a tool and for personal taste.

EQ As A Tool. If you reflect on the task of a recording engineer, the idea that he is going to run into problems in his work will not seem surprising. The difficulties encountered may lie in the areas of instrumental balances, equipment overload, signal-to-noise ratio, and frequency response, to name a few possibilities. When the problem can be traced to frequency response—and quite a few can—the equalizer becomes an extremely valuable tool.

For example, one problem that occurs regularly is caused by the "proximity effect," a bass boost that happens when using a directional microphone in close-miked situations. Here, the low filter would be your best bet. First, it will attenuate the excessive low-frequency signal before it enters the actual EQ circuitry, minimizing the chance of overload; second, it will leave the bass control free for other uses if needed. (If the mike has its own switchable low-cut filter built in, using that to keep the unwanted frequencies out of the preamp as well will give even more overload protection.)

Another proper occasion to use the low filter is when recording vocals close-up. Not only because of the proximity effect just mentioned, but also to minimize "popping" P's, which contain a lot of low-frequency energy. Moreover, rumble and low-frequency mud can enter

your recordings owing to extraneous vibrations such as walking on non-concrete floors, operating air conditioners, and the like.

Treble is often accentuated to increase clarity or to enhance the presence of a vocal or string part that might otherwise be lost in the mix. Horns, cymbals, acoustic guitars and many other instruments can also be greatly enhanced in this way, but the engineer must know where the formants (the most important characteristic frequencies for the various instruments) lie. Boosting high treble on an instrument with little output in that region will do nothing but add hiss. In fact, when dealing with such an instrument, it is often possible to make a substantial improvement in the signal-to-noise ratio by carefully reducing the unnecessary high-frequency bandwidth with treble control on each channel for frequencies beyond the range of interest. This is most effective when done in mixdown, as tape hiss will also be reduced. For this same reason, when treble boost is employed, it is usually best applied ahead of the recorder.

EQ can also help to correct for poor room acoustics. Recording live, even the most accurate mike may not capture that terrific sound you hear when you stand right next to the instrument. Close-miking may help, but in many cases this is impractical since many instruments do not radiate sound from a single point source.

Consider a grand piano, string bass, xylophone, or gong. All of these radiate sound from a large surface area, leaving no single mike position that would be close to all parts of the source. Such large instruments require a more distant microphone placement if a well-balanced pickup is to be had. Unfortu-

nately, as the distance between source and mike increases, acoustics of the room begin to affect the sound. This isn't always bad—a good room might add a warmth and character unobtainable in any other manner. But when a close-up sound with lots of presence is desired, equalization in the form of treble boost or midrange cut can often do the trick.

Seasoning To Taste. While no one yet has found a definitive way to tell what sounds good and what doesn't, recording engineers have developed various techniques for emphasizing what they consider to be the more pleasant qualities of musical sounds. In fact, many engineers pride themselves on "getting their own sound." This is an area of taste, so naturally there are no hard, fast rules to apply. Some good starting points can be established, though, as follows. Generally speaking, you would boost treble for clarity or presence (the midrange can affect this too), and bass for fullness or punch. Sometimes it seems that no matter how much top or bottom you add, something is still not right. Often what is involved is one or more unpleasant resonances caused, as mentioned earlier, by either microphone characteristics or placement, or even by bad qualities within the instrument itself, especially if it is out of adjustment or of low quality. Eliminating these midrange resonances will often improve the sound and may minimize a need to boost highs and/or lows.

To find these magic EQ settings, start by turning off all but the principal microphone that can pick up the instrument you're working with. If it's the snare drum, for example, shut off the tom and kick mikes. They'll interact later anyway, but the less you need to concern your-

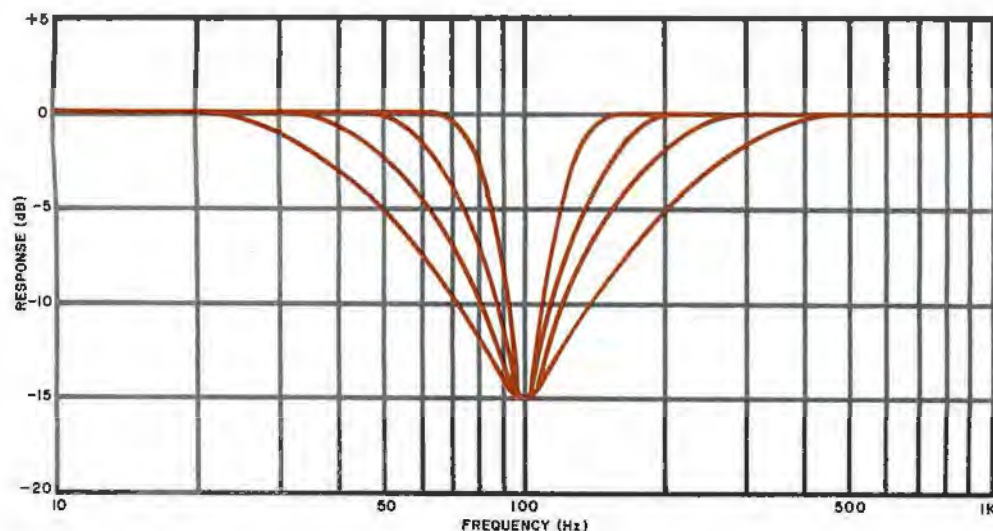


Fig. 4. Response curves showing the effect of varying the bandwidth of a midrange dip.

The chart given below lists some common instruments with frequencies at which boost or cut can be effectively applied to cure various problems or obtain certain effects. Indicated frequencies are necessarily approximate, as no two instruments sound exactly alike. The column marked "comments" gives cautions or observations based on experience. They should be taken as guidelines rather than prescriptions, for every situation is different and every recordist has his own sonic goals.

A few general hints may contribute to the effective use of equalization: (1) Your

SPECIFIC INSTRUMENTS AND THEIR CHARACTERISTIC FREQUENCIES

memory is shorter than you think; return to a flat setting now and then to remind yourself where you began.

(2) Make side-by-side comparisons against commercial releases; this will help you in judging overall blend.

(3) You can tailor the sound of an instru-

ment only so far without losing its identity; every instrument can't be full, deep, bright sparkly, etc., all at once. Leave some room for contrast.

(4) Take a break once in a while. Critical listening tends to numb one's senses after awhile, especially if you like to run monitors at high levels. Sounds may appear very different to you the next morning.

(5) Don't be afraid to experiment. If you can't find just what you want with equalization, try moving the mike a little, if that won't work, move the instrument. But most of all, keep trying.

COMMON FREQUENCIES FOR EQUALIZATION

Instrument	Cutting	Boosting	Additional Comments
Human Voice	Scratchy at 2 kHz. Nasal at 1 kHz. Popping p's below 80 Hz.	Hot at 8 or 12 kHz. Clarity above 3 kHz. Body at 200-400 Hz.	Tend towards thin when blending many voices.
Piano	Tinny at 1-2 kHz. Boomy at 320 Hz.	Presence at 5 kHz. Bottom at 125 Hz.	Not too much bottom when mixing with rhythm section.
Electric guitar	Muddy below 80 Hz	Clarity at 3.2 kHz. Bottom at 125 Hz.	
Acoustic guitar	Tinny at 2-3.2 kHz. Boomy at 200 Hz.	Sparkle above 5 kHz. Full at 125 Hz.	
Electric bass	Tinny at 1 kHz. Boomy at 125 Hz.	Growl at 620 Hz. Bottom below 80 Hz.	Sound varies greatly depending on type of strings used.
String bass	Hollow at 620 Hz. Boomy at 200 Hz.	Slap at 3.2-5 kHz. Bottom below 125 Hz	
Snare drum	Annoying at 1 kHz.	Crisp above 2 kHz. Full at 125 Hz. Deep at 80 Hz.	Also try adjusting tightness of snare wires.
Kick drum	Floppy at 620 Hz. Boomy below 80 Hz.	Slap at 3.2-5 kHz. Bottom at 80-125 Hz.	Usually recorded with front drum head removed. Place blanket inside of drum resting against head.
Tom toms	Boomy at 320 Hz.	Slap at 3.2-5 kHz. Bottom at 80-200 Hz.	Tuning head tension is extremely important.
Cymbals, bells, tambourines	Annoying at 1 kHz.	Sparkle above 5 kHz.	Record these instruments at conservative levels, especially at slower tape speeds.
Horns and strings	Scratchy at 3.2 kHz Honky at 1 kHz. Muddy below 125 Hz	Hot at 8 or 12 kHz. Clarity above 2 kHz Lush at 320-400 Hz.	

self with now, the better. Next, try boosting some different midrange frequencies, adding at least 10 or 15 dB, to make the changes obvious. Where you start will naturally depend on the instrument. Since physical resonances of instruments usually fall between, say, 100 Hz and 1 or 2 kHz, these frequencies are likely starting points. After determining which one sounds the *worst*, return to the flat setting momentarily to allow your ears to readjust, and then cut the chosen frequency in small steps until the

optimum point is reached. The same general plan can work for boosting, although then you'd be looking for frequencies that make the sound better when boosted.

When adding treble or bass, be sure the controls are doing what you expect them to. If you don't obtain an appreciable improvement, move on to a different frequency. Remember, a lot of boost at the extreme low end can route excessive infrasonic energy to the loudspeakers, which could damage them. Similar-

ly, too much ultrasonic content can damage tweeters and overload the tape deck. Even with VU meter indicators in the black, safety is not guaranteed; limited meter frequency response sometimes prevents them from giving a true picture. Also, VU meters tend to miss sharp transients from drums and other percussion instruments; the pointer simply cannot move fast enough. Pre-emphasis within the deck also can aggravate the situation, so be particularly careful at the slower tape speeds. ◊

BUILD A Speaker Protection Circuit

BY MIKE ROGALSKI

AFTER LONG periods of listening to reproduced music played at a high volume level, it's not uncommon for one's hearing to become insensitive to average loud sounds. As a result, the listener often turns up the gain to compensate for this diminished sensory perception.

The best way to protect our hearing ability—and do a good turn for our speaker systems—is to put an upper limit on the decibel level our sound systems can generate. This is precisely what the automatic audio-overload/speaker-protection circuit described here does.

There are, of course, many circuits that use zener diodes and SCRs to shunt power to dummy loads. Most act too fast, however. This causes important dynamics such as drum rolls, cymbal crashes, and trumpet blasts to get "crunched." A slow-acting threshold sensor that has built-in hysteresis and a comparator circuit would be excellent for providing automatic level limiting, but it requires a power supply. The speaker-protection system here, on the other hand, is far simpler in circuitry, self-powered, automatic in action, and connects directly between the power amplifier and the speaker system it is to protect. It is also inexpensive to build.

About the Circuit. The output from the power amplifier to the speaker-protection circuit is shown in Fig. 1. (The rectifier diodes should have a forward resistance of approximately 600 ohms to introduce minimal signal distortion.) The signal then goes to the normally-closed relay contacts and out to the speaker system.

At high signal levels, the charging circuit consisting of $R1$ and $C1$ generates sufficient voltage levels to energize $K1$ and open its contacts. When $K1$ energizes, $R2$ is connected in series with the speaker system to drop the sound level. Then, when the input signal level drops, $K1$ de-energizes

and its contacts automatically close, removing $R2$ from the circuit.

Construction. The simplicity of the protection circuit lends itself to just about any method of construction desired. For those who wish to use printed-circuit construction, an actual-size etching-and-drilling guide and components-placement diagram are given in Fig. 2. Once wired, this compact pc assembly can be permanently mounted inside the speaker system's enclosure or connected directly to the speaker terminals.

Relay $K1$ should have a dc coil resistance of about 100 ohms and a dc pull-in rating of at least 2 volts less

than the required rms voltage cutout point of the speaker system. This allows for the voltage drop across the rectifier circuit. The diodes and capacitors should have twice the peak voltage rating of the signal passing through them. The components specified in Fig. 1 are for a 4- and an 8-watt unit and will protect a speaker system rated at 5 to 10 watts with a 20% derating factor for safety.

Resistor $R1$ can be bypassed to move the operating point of $K1$ down to 4 watts.

Adjustment. Make certain that the common of each amplifier output circuit is connected to the common of the speaker protector and observe proper speaker phasing when connecting the device into your audio system. With a relay whose coil resistance is about 100 ohms, the circuit shown in Fig. 1 will cut out at 4, 8, or 12 watts if the value of $R1$ is 0, 50, or 100 ohms, respectively. Since the circuit is basically a voltage divider, doubling the value of $R1$, shifts the rms point 50% higher. You can also experiment with the value of $R2$ to obtain the low level desired.

PARTS LIST

- $C1$ —100- μ F, 50-volt electrolytic
 - $D1$ thru $D4$ —Silicon rectifier diode (see text)
 - $K1$ —Spst relay with 100-ohm dc-resistance coil (American Zetler No. A 535-11-2 or similar) (see text)
 - $R1$ —Value depends on power protection level: 0 ohms for 4 watts; 50 ohms for 8 watts; 100 ohms for 12 watts
 - $R2$ —50-ohm, $\frac{1}{2}$ -watt resistor
- Note: The following items are available from Micro Sound, 1012 Disston St., Philadelphia, PA 19111: Pcb board for \$3.00; board and all components (state $R1$ wattage) for \$10.00 postpaid.

Fig. 1. The self-powered circuit, left, automatically reduces speaker level when peaks occur.



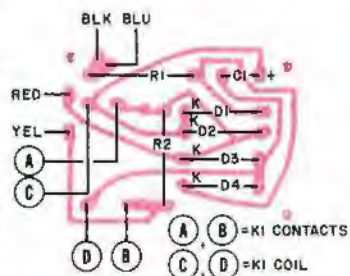


Fig. 2. Actual-size etching and drilling guide, right; component placement above.

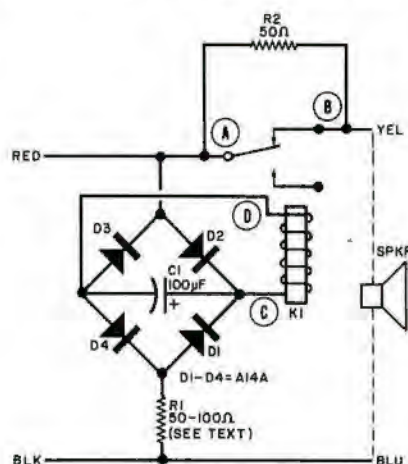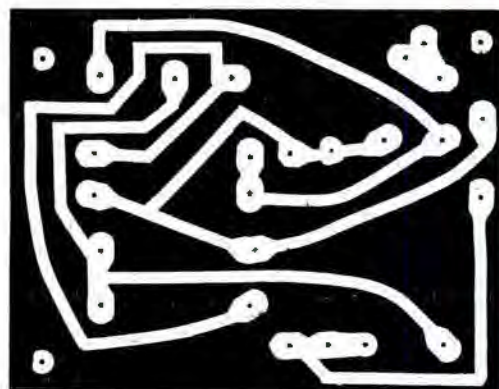

SPACE-AGE ELECTRONIC PROJECTS FOR BOATS *part two*

LAST MONTH, we showed you various ways to use the LM3914 dot/bar display driver in instruments for your boat, new approaches to water-level detection, and a rudder-angle indicator. In this second and final part, concentration is on bilge-water warning systems, electrical-system transient protection, and a unique digital tachometer.

Bilge Alarm. There are a number of ways to provide bilge-water warning. One of the simplest is the float-actuated-switch system shown in Fig. 10. Here, a sealed tube containing a reed switch is surrounded by a float with a built-in magnet. The float rides up and down the tube with increasing and decreasing water level, closing and opening the switch's contacts.

With the actuating switch assembly placed low in the bilge, the float lifts with rising water level. At some predetermined point, the contacts of the reed switch close and the alarm sounds or/and an indicator light comes on. Alternatively, the system can be rigged to automatically turn on the bilge pump as well as sound an alert.

There is nothing electronic about the system shown in Fig. 10, but it is so sim-

ple that it is just about foolproof. While you can fabricate your own float switch if you wish, it is hardly worth the effort because all-plastic units for boats are available from marine hardware stores at low cost.

A second bilge alarm is shown in Fig. 11. Here, a pair of electrodes is sealed in an insulating housing that is mounted low in the bilge. A small screen surrounds the probe-like elements to prevent bridging by debris.

In fabricating the probe shown in Fig. 11, two small brass bolts are mounted on a small disc of insulating board and are connected through a pair of resistors to a water-tight cable that goes to the instrument panel. The disc fits one end of a $\frac{3}{4}$ " (19.1-mm) plastic plumbing fitting. Then the whole rear of the assembly is filled with epoxy to seal in the probe ends, resistors, and cable connections. When potting is finished, there should be no place, except at the probe tips, where moisture can bridge the circuit.

When water bridges the probe tips, the SCR fires and actuates the alarm. The Sonalert alarm will continue to sound, even after the water level drops below the point where it bridges the probe tips, until the switch is opened. To

Projects in this concluding part cover a bilge-water alarm, a tachometer and voltage-transient protection

rearm the alarm, simply close the switch.

A third type of bilge alarm is illustrated in Fig. 12. This system is designed for boats with multiple bilge spaces that are separated by watertight bulkheads. An audible alarm and a visual indicator to tell you which bilge has water in it are required in this system.

The sensors in this circuit are LM1830 fluid-detector ICs. When water bridges the probes, the output of the associated IC goes high and turns on the pair of transistors connected to it. Output connections to the transistor switches are arranged so that water entering any bilge space and bridging its probes will activate the Sonalert but will light only the LED labelled for that bilge. You can duplicate the circuit for each bilge to be protected. The only thing in common among the circuits is the Sonalert.

Shown in Fig. 12 is a method for marking the safety panel area where the LEDs are mounted. Using the layout shown, you know instantly which of the bilges is leaking (by its lighted LED) when the alarm sounds.

The transistors can be replaced by a DIP transistor array, provided the outputs can sink enough current to drive the Sonalert. You can use a high-power alarm sounder by replacing the Sonalert with a relay whose contacts can handle the bigger alarm's current. If you use this arrangement, be sure to install a protective diode across the relay's coil.

Tachometer. The circuit shown in Fig. 13 consists of a basic 0-to-2.4-volt meter system and a frequency-to-voltage (f/v) converter. The voltmeter portion made up of IC1 and IC2 features 20 divisions, each represented by a LED. The IC3 f/v converter accepts varying-frequency pulses from the engine's ignition points and converts them into proportional dc voltages with constant updating.

Using a system like that shown makes possible an economical solid-state alternative to the traditional analog meter. It is free from parallax errors and is much easier to read and interpret than the analog meter, too. At night, readability increases, and the red emission of the LEDs has little effect on night vision.

The two LED drivers are cascaded by connecting mode pin 9 of IC1 to pin 1 of IC2. Pin 9 of IC2 connects to pin 11 to produce dot operation. Internal IC operation requires R1 to be connected across LED9 (pin 11 of IC1) to obtain proper operation. Resistor R2 sets the

Fig. 10. A simple type of bilge-water warning system is shown here. Details of float-actuated switch are at top. Circuit in center simply actuates LED or alarm, while that at bottom turns on bilge pump at the same time.




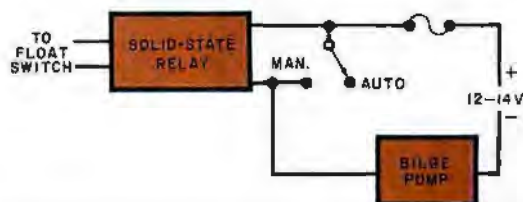


Fig. 11. In this type of bilge alarm, the electrodes are simple steel screws sealed in insulated housing. Alarm sounds until switch is opened.

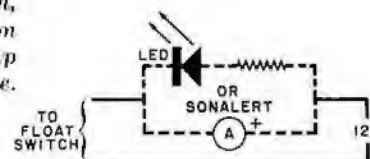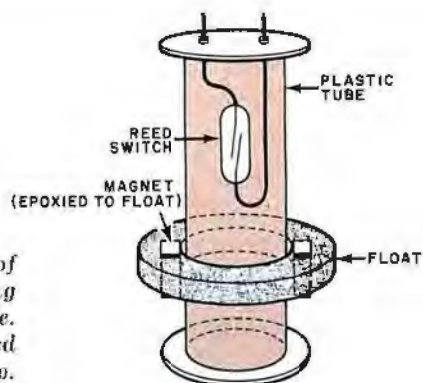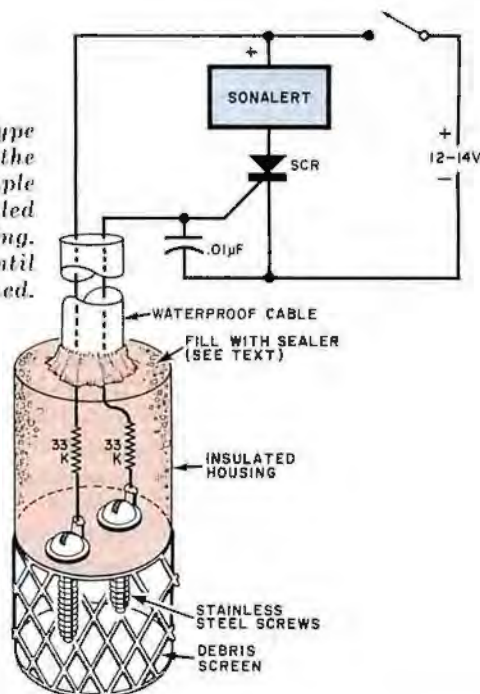

scale of IC1 to half the voltmeter range. Because 1.2 volts should be generated across it, this resistor should have a 1% or better tolerance. Also, since 2.4 volts is generated across it, R3 should be rated at 1% or better tolerance. These re-

sistors also program the ICs to deliver 10 mA to each LED.

A charge-pump frequency-to-voltage (f/v) converter, high-gain op-amp/comparator, and an uncommitted output transistor are contained in IC3 (Fig. 14).

A Schmitt-trigger device is used for the input. It features a built-in hysteresis to provide clean switching if noise is present on the input signal. In the 14-pin DIP LM2917N version of the IC, an internal zener diode also maintains calibration stability.

In Fig. 13, $R5$, $R6$, and $C1$ condition the input signal from the points. A stable-temperature-characteristic capacitor must be used for $C2$, which is the timing capacitor for the charge pump. Potentiometer $R9$ serves as the discharge path and doubles as the scale calibration control. Charge-pump filtering is provided by $C3$. The uncommitted emitter of the internal output transistor is connected to $R10$.

The input signal for the voltmeter is taken from $R10$'s wiper. This allows the output of the tach section to be matched to the voltmeter's full-scale range. (Although this could be accomplished via $R9$, better linearity is possible when the full output of the tach circuit is used and then reduced in level to match the requirements of the voltmeter.) Biasing for the internal op amp is obtained with $R7$ and $D2$.

There are a number of ways to assemble the tach. The LEDs can be arranged in a vertical column, with the highest rpm at the top, or you can opt for

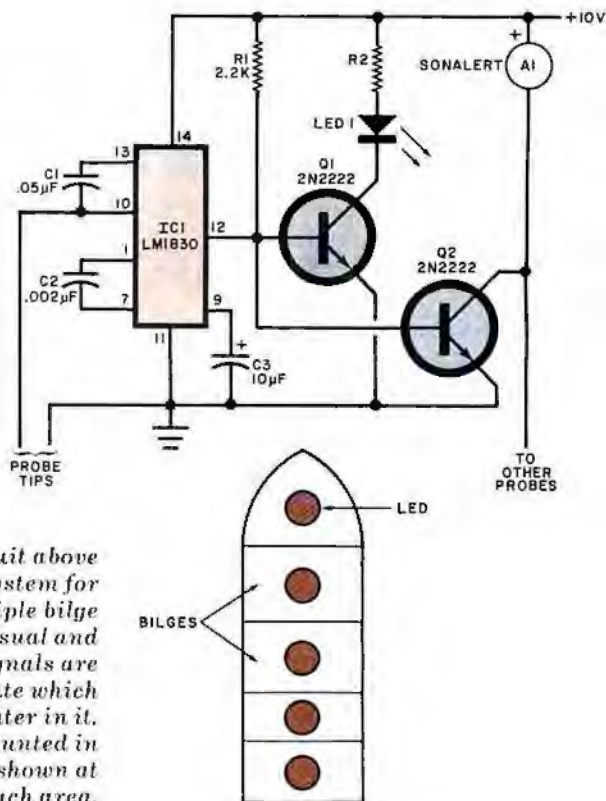


Fig. 12. Circuit above is an alarm system for boat with multiple bilge spaces. Visual and audible signals are used to indicate which bilge has water in it. LEDs are mounted in diagram as shown at right to show each area.

PARTS LIST (Fig. 12)

A1—Sonalert SC628 or similar
C1—0.05- μ F disc capacitor
C2—0.002- μ F disc capacitor
C3—10- μ F, 6-V electrolytic
IC1—LM1830 (National)
LED1—Bright red LED
Q1, Q2—2N2222 transistor
R1—2200-ohm, $\frac{1}{2}$ -W resistor
R2—To suit LED current

PARTS LIST (Fig. 13)

C1, C2—0.02- μ F capacitor
C3—1- μ F, 12-V electrolytic
D1—18-V zener (see text)
D2—1N914
IC1, IC2—LM3914 Dot/Bar Driver (National)
IC3—LM2917N 14-pin F/V Converter (National)
IC4—10-V, 0.5-A positive regulator
LED1 through LED20—Bright red LED
R1, R6—20,000-ohm, $\frac{1}{2}$ -W resistor
R2—100-ohm, 1%, $\frac{1}{2}$ -W resistor
R3—2400-ohm, 1%, $\frac{1}{2}$ -W resistor
R4—10-ohm resistor (see text)
R5, R7—10,000-ohm, $\frac{1}{2}$ -W resistor
R8—470-ohm, $\frac{1}{2}$ -W resistor
R9—100,000-ohm, multi-turn pot
R10—10,000-ohm, multi-turn pot

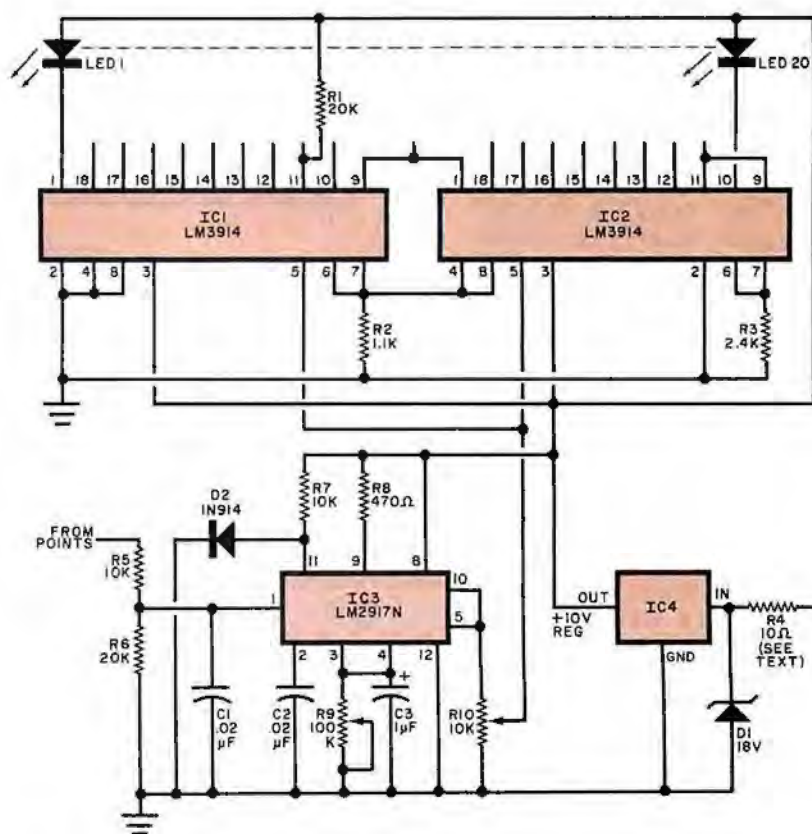


Fig. 13. Circuit for converting pulses from ignition points to voltages which activate LEDs from 1 to 20 to indicate speed.

the more familiar circular arrangement.

When assembling the project, it is best to slightly recess the LEDs behind a red filter to avoid effects of washout in brightlight. Use high-luminosity LEDs instead of the commonly available "standard" LEDs. Finally, to assure maximum contrast and eliminate reflections as much as possible, apply a coat of matte black paint on all surfaces behind the LEDs and the front panel or bezel into which the red filter is set.

Wiring is not critical. However, it is important that you observe the common ground point near pin 2 of IC1.

There is a considerable variation in the range requirements for a tachometer for inboard boat engines. Commercial analog tachs are scaled for 6000 rpm and supplied with links to adapt them to all types of engines. With the tach described here, the top end of the range can be chosen to suit the requirements of any given engine.

A 4-cycle engine fires each cylinder once every two revolutions. An 8-cylinder engine running at 4000 rpm would fire 4×4000 or 16,000 times per minute. This is equivalent to a tach input frequency of 266.67 Hz. For a 6-cylinder engine operating at 4000 rpm, there are three pulses per revolution, which is equivalent to an input frequency of 200 Hz. Note that this is a linear relationship and can be plotted as shown in Fig. 15.

Following is the calibration procedure for a 6-cylinder engine with LED20 indicating 4400 rpm. Apply 15 volts from a bench-type power supply to the power leads of the tach. Next, connect the output of a square-wave generator to the tach's input through a 0.1- μ F capacitor. Using a frequency counter, set the generator for a high-level output of 220 Hz. Set R9 near maximum resistance. Using a high-impedance voltmeter, connected between pin 5 of IC1 and ground, adjust R10 for a 2.4-volt reading. This should turn on LED20. Adjust R9 until LED19 extinguishes and LED20 is at full brilliance. There is some overlap built into the dot drivers so that one LED fades out as the next LED comes on. Slowly reduce the frequency of the generator while observing both the tach display and frequency counter to check the linearity of the tach's scale. It will not be perfect, but it will be better than a quick glance at a standard analog meter.

The calibration procedure for an 8-cylinder engine will be the same as that for the 6-cylinder engine above. The only difference is that you start with a generator frequency of 293.3 Hz.

Fig. 14. A charge-pump f/v converter, op-amp/comparator, output transistor and zener diode are contained in LM2917N IC.

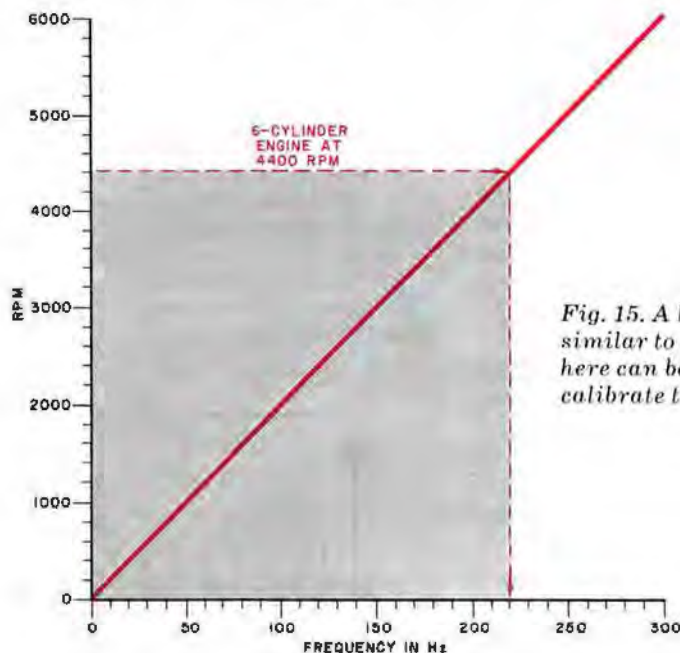
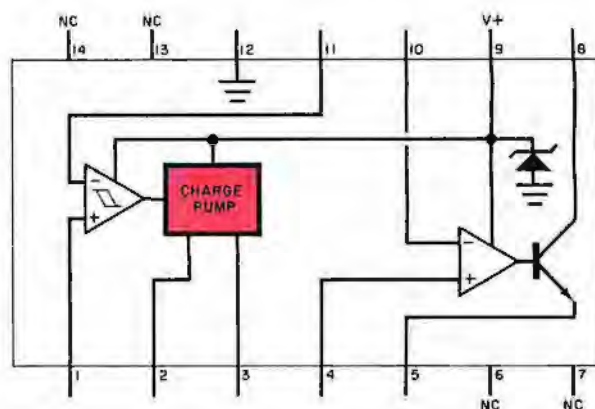


Fig. 15. A linear plot similar to that shown here can be drawn to calibrate tachometer.

Fig. 16 Tachometer add-on is used to identify critical cruising speed.

PARTS LIST (Fig. 16)

- C1—100- μ F, 12-V electrolytic
- R1—100-ohm, 1/2-W resistor
- R2—1000-ohm, 1/2-W resistor
- R3—470-ohm, 1/2-W resistor

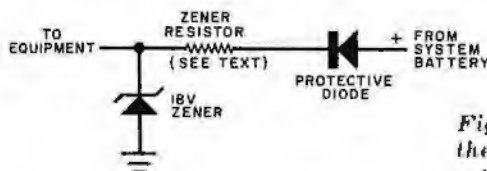
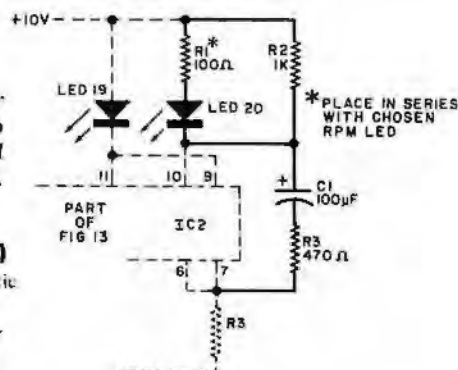


Fig. 17. A series diode is used in the positive supply for reverse voltage protection as shown here.

If your finished tach has a tendency to flicker at low rpm, increase the value of C3. Do not overdo this because if the value is raised to 2 μ F, the flicker will be reduced, but at higher speeds there may be a tendency for adjacent LEDs to flicker back and forth as a low-frequency oscillation sets in. Of course, a rough running engine is going to produce lots of flicker, which can serve as a reminder to have your engine tuned. The value of C3 is a compromise. Once you install the tach, it is a good idea to have it checked against a good-quality tachometer.

The circuit shown in Fig. 16 is a useful add-on for the tach. It can be used to identify the critical cruising rpm where fuel economy is at its best or as an over-rpm warning. The LED in the string to which it is connected will flash on and off when the indicated rpm is reached. The flash range is quite narrow. Bear in mind, therefore, that this circuit may not be usable as an attention getter with a rough-running engine. The rpms would be traversing the flash point too rapidly for the circuit to go into action.

Transient Protection. Any mobile electrical system, including that in a boat, can suffer from voltage transients of many kinds. Some transients are capable of destroying solid-state components and systems. Hence, it pays to have adequate transient protection.

There are simple ways to give a large measure of transient protection to home-built projects. GE's MOV transient protectors is one simple way. A second method is shown in Fig. 13, where 10-ohm resistor R4 and 18-volt zener diode D1 protect the power input line. If the circuit is to take care of a blown regulator, where 18 volts may be on the line continuously, the division of dissipated power between the zener diode and resistor must be calculated. Once breakdown occurs, the circuit will be carrying well over 1 ampere of current. This means that the power (wattage) ratings of the resistor and diode must be calculated.

Reverse voltage protection is a simple matter of installing a series diode in the +V line, with the diode's anode connected to the + input, as shown in Fig. 17. Each subsystem should be individually protected, both for transients and reverse voltages, to assure maximum security against failure. Of course, one heavy-duty zener-diode circuit can be used for an entire instrument group to handle steady-state overvoltage conditions, but smaller suppressor circuits should still be used on each board. \diamond

Introducing . . .

The Solar Alarm Chronometer

- Light Energized
- Electronic Quartz Accuracy
- 24 hour alarm

A personal alarm and time system powered by light.



Only \$49.95

You can't wear a more accurate watch. Plus this new LCD chronometer has a built-in 24-hour alarm and personal reminder system. And you no longer have to worry about batteries failing because this watch is constantly being recharged by light. A true scientific breakthrough.

Forget about losing time

The time base is a finely tuned quartz crystal, trimmed by the manufacturer electronically to an accuracy of 5 seconds per month. And the manufacturer stands behind this accuracy with a one year limited warranty plus a 5 year replacement warrant on the micro-rechargeable energy cells.

Who is the Manufacturer

U.I.T. has been the innovator in the digital watch industry for years. U.I.T. is the prime manufacturer, assembler and importer of LCD watches. U.I.T. has been the pioneers of solar powered watches where "light energy" recharges micro-energy cells contained in the watch. A system so efficient they are able to offer the unheard of 5 year warranty.

Forget about batteries

The new solar-alarm is powered by micro-energy cells which are constantly being recharged from available light. Not just solar light but ordinary room light. You never need to worry about batteries.

Forget about changing technology

This solar-alarm watch uses all of the

latest technology in electronics and engineering. The programmed time measuring features include hours, minutes, and pulsating seconds plus the month and date displayed instantly with the touch of a button. The large liquid crystal display constantly shows the time in large easy to read numerals. A special night light command button illuminates the dial for night viewing.

Forget about being late

The most unique function of this solar chronometer is the alarm system. The 24 hour alarm system is easy to set without disturbing the time function. And it sounds with a pleasant electronic beep precisely at the pre-set time. Your own personal alarm system will automatically beep you at the right time for "on-time" punctuality, so important with today's busy schedules. You may never be late again.

Test it for 2,592,000 seconds

Take 30 full days (2,592,000 seconds) to confirm the accuracy and utility of this fine timepiece. If you doubt the quality, merely return it for a full refund.

If you have been looking for that special opportunity to own a chronometer of the future here is your chance! Available in silver or gold tone with fashion flex band. All U.I.T. timepieces feature ultra-thin design, rugged shock proof engineering and water resistant construction. The solar-alarm watch is priced at \$49.95 each plus \$2.50 shipping & handling. (IL. residents add 5% sales tax).

CAMBRIDGE INTERNATIONAL, Inc.

8700 Waukegan Road, Morton Grove, Illinois 60053 (312) 966-5510

Dept. PE9

Credit card customers call operator #219 toll free
800-241-8444 (In Ga. call 1-800-323-9123)

Clip & mail to: Cambridge International, Inc. Dept. PE9
8700 Waukegan Rd., Morton Grove, Ill. 60053

☐ Please send me _____ Solar-Alarm Watches at \$49.95 each plus \$2.50 shipping & handling. I understand that I may return my purchase within 30 days for full refund.

☐ silver tone ☐ gold tone

☐ Check or MO enclosed. Change to: ☐ Visa ☐ Master Charge

Account # _____ Exp. Date _____

Name _____

Address _____

City _____ State _____ Zip _____

Signature _____

© Cambridge International, Inc. 1978

204



Experimenter's Corner

By Forrest M. Mims

IC INTERVAL TIMERS

AN INTERVAL timer is a circuit that provides an output pulse of predetermined width at periodic intervals. This can be readily accomplished using any one of several timer ICs available to today's electronic experimenter. Many IC timers, such as the well-known 555, are not only capable of such astable operation but can also function as monostable multivibrators or "one-shots."

Figure 1 is a timing diagram comparing the operation of a monostable to that of an interval timer. Note that a one-shot timer is designed to activate an external device or circuit for or after a fixed period. An interval timer, on the other hand, provides uniform output pulses at an adjustable interval.

You are probably already familiar with numerous applications for conventional one-shot timers. Common examples include automatic switches that extinguish the headlights of a car a minute or so after the ignition is turned off, delayed-action intrusion alarms, switch debouncers, kitchen and dark-room timers, etc.

Although the applications for interval timers are not as numerous, they include two that are particularly interesting: time-lapse photography and time-lapse sound recordings.

You have probably seen many examples of time-lapse photography—the opening of a flower, formation of clouds, construction of a building, etc. Time-lapse sound recordings can store periodic samples of data encoded as an audio tone as well as simply capture ambient sounds. In the latter category, an interesting possibility is to compress a 24-hour history of the sounds at a busy street corner into a one-minute recording. Another is entertaining your family or friends at a party by sampling brief segments of a record, radio program or conversation and playing back the string of sound "snapshots."

Of course, time-lapse photography and sound recordings are not the only applications for interval timers. Before you've

finished reading this column, you will probably have thought of several more.

Basic 555 One-Shot. Although most experimenters have assembled either breadboard or permanent circuits that use a 555 timer, many do not fully understand how this IC works. For those of you in this category, the following paragraphs will provide a quick overview of the monostable operation of the 555. If you're already familiar with 555 basics, you can skip ahead to the next section.

Figure 2 is a simplified block diagram of a 555 connected as a monostable or one-shot timer. The key sections of the 555 are the two comparators, VC1 and VC2. They sense when the timing capacitor ($C1$) has charged or discharged to a predetermined level.

To understand how the 555 works, assume the circuit in Figure 2 is "off." This means the control flip-flop is reset and $Q1$ is on. Capacitor $C1$ is therefore short circuited by $Q1$ and cannot charge. The output of the circuit (pin 3) is low. A negative pulse applied to the TRIGGER input (pin 2) momentarily causes the output of comparator VC2 to go high, setting the control flip-flop. This cuts off $Q1$, which allows $C1$ to charge exponentially at a rate determined by the values of $C1$ and $R1$. During this period, the output at pin 3 is high.

Notice the three series-connected 5000-ohm resistors in the 555. These resistors form a voltage divider that biases the noninverting input of comparator VC2 at one-third of the supply voltage and that of comparator VC1 at two-thirds of the supply voltage. When the voltage across $C1$ reaches two-thirds of the supply voltage, the output of comparator VC1 goes high and resets the control flip-flop. This turns $Q1$ on and shorts out $C1$. The output at pin 3 returns to ground and remains there until the entire timing cycle is repeated. This is

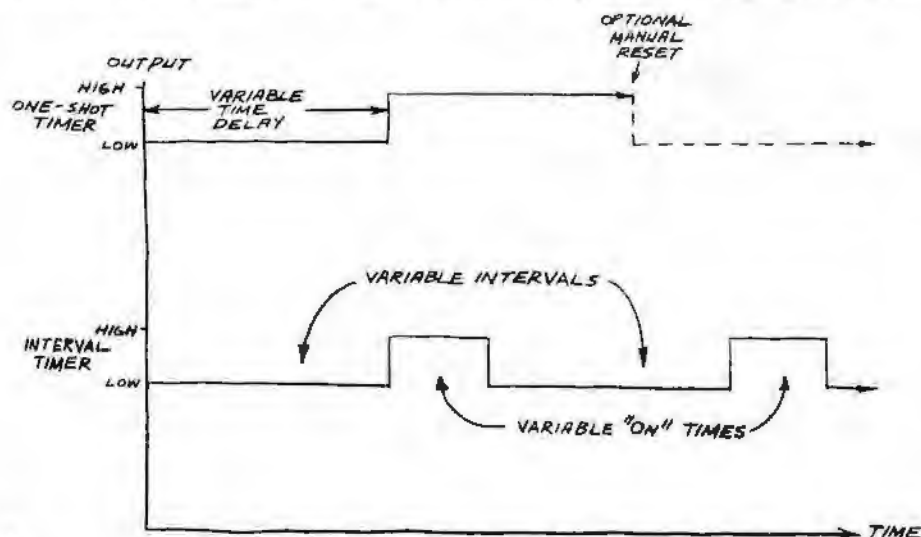


Fig. 1. Timing diagrams of the output waveforms generated by monostable multivibrator or one-shot (top) and interval timer (bottom).

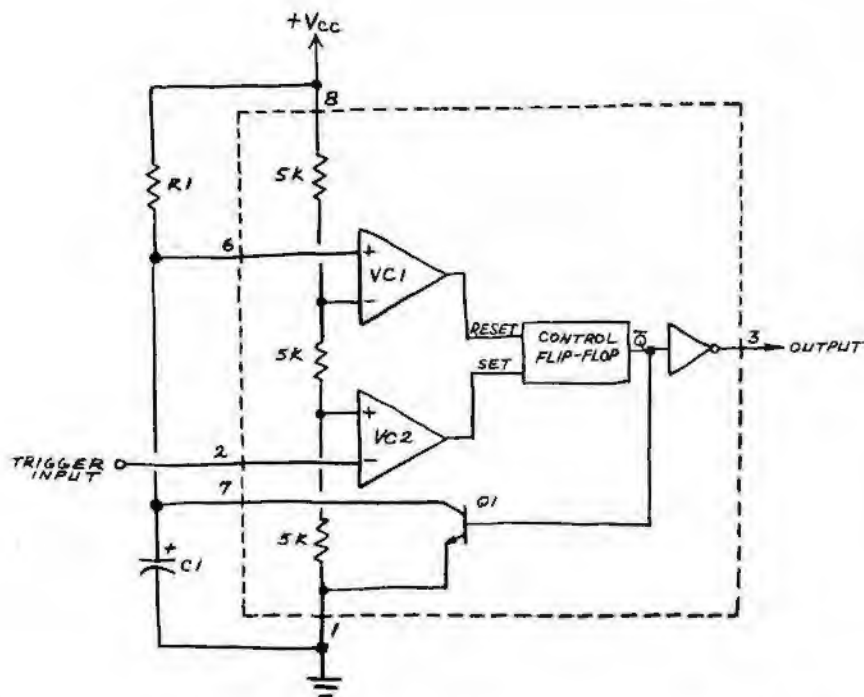


Fig. 2. Simplified functional diagram displays inner workings of a 555 timer IC. External components $R1$ and $C1$ control timer's period.

accomplished by applying a new trigger pulse at pin 2.

This explanation should give you some insight into the operation of the 555 in its monostable mode. It should now be obvious that you can easily select the time delay by the proper choice of components for $R1$ and $C1$. If long delays (more than several minutes) are to be obtained, it's important to use a component with extremely low leakage for $C1$. Otherwise, the capacitor will never be able to charge as it should and the circuit will not function properly.


555 Interval Timer. A 555 monostable can function only as a single-delay timer. A reset pulse is required to initiate a new delay period. An interval timer, however, can be made by connecting the output of a 555 operated as a free-running (astable) oscillator to the TRIGGER input of a 555 monostable. The period of oscillation of the astable will determine the interval time. The RC time constant of the monostable will determine the duration of the output pulse that follows each timing interval.

Figure 3 shows the schematic of a working dual-555 interval timer. Interval times (determined by the values of $R1$ and $C1$) of up to several minutes are achievable with the values shown. Note that the output pulse from the first 555 is directly coupled into the input of the 555 monostable. The output of the monostable is connected to a low-voltage relay coil through $D1$. Diode $D2$ shorts out the powerful inductive kick produced across the relay coil when current to it is interrupted, thereby protecting the 555's output stage from damage.

The values of $R3$ and $C2$ determine how long the relay is energized after each timing interval. Those specified keep the relay energized for almost exactly 5 seconds (4.98 seconds for the breadboard circuit I built). Change the value of $R3$ or $C2$ or both to obtain different times.

The relay contacts can be used to switch many different circuits or devices on or off. Figure 3, for example, shows the normally-off contacts connected to the switch jack of a tape recorder. This jack is commonly found adjacent to the microphone jack on many cassette recorders. It allows the recorder

Fig. 3. Interval timer employs one 555 as an astable multivibrator to trigger a second IC operating as a monostable. Relay $K1$ keys external circuit.

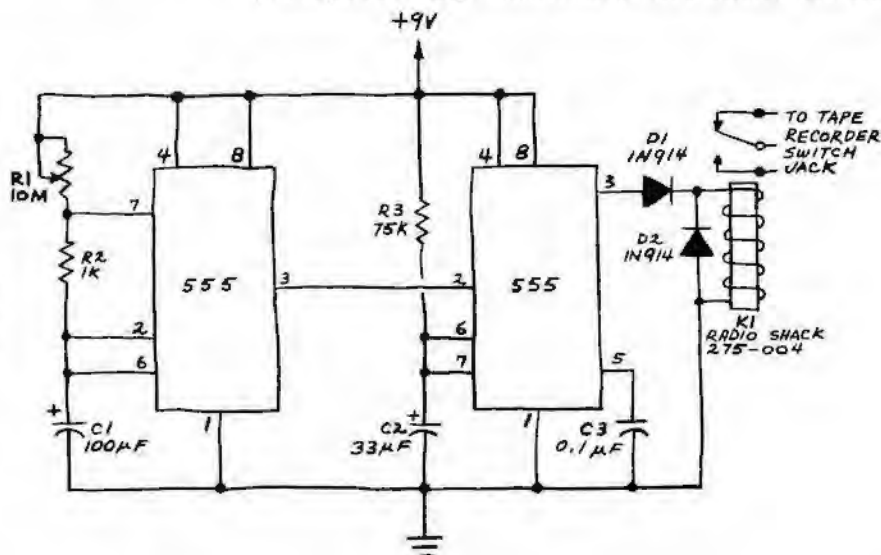

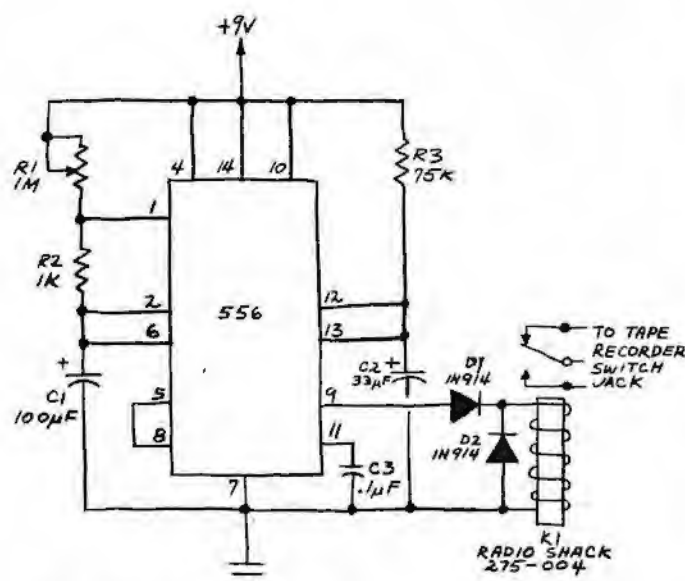


Fig. 4. This circuit, which employs a 556 dual timer, is functionally identical to the one shown in Fig. 3.

to be turned on and off remotely by means of a small switch such as one mounted on the case of the microphone.

If you want to connect the relay to a tape recorder, use an appropriate plug. You'll have to improvise when connecting the relay contacts to other equipment or circuits. (A few words of caution—never connect the relay to a circuit that exceeds the maximum ratings for the relay's contacts. Also, never switch ac line power with an unenclosed relay. Personally, I prefer to play it safe with low-voltage applications only.)

556 Interval Timer. The 556 is a pair of 555 timers on a single silicon chip. The circuit in Figure 3, as you might suspect, can be readily assembled with a single 556 dual timer rather than separate 555's. Figure 4 shows the functionally identical circuit.

XR-2240/555 Long-Duration Timer. Because of leakage in the timing capacitor, the maximum period of a 555 operated as an astable oscillator is usually limited to several

minutes. The XR-2240 (or XR-2340) is a specialized IC timer that incorporates a self-contained flip-flop divider chain to increase the length of the fundamental time delay by a factor of up to 255. Because the output of each flip-flop in the chain is directly accessible, many different time intervals can be selected without having to alter the values of the circuit's timing capacitor and resistor.

Figure 5 is the schematic of a long-duration, programmable interval timer made from an XR-2240 connected as an astable oscillator and a 555 operated as a monostable. Timing components $R1$ and $C1$ control the oscillation rate of the XR-2240. The values shown give an adjustable interval T of up to about 100 seconds. The outputs at pins 1 through 8 allow you to select multiples of T ranging from 1 to 128. Therefore, selecting pin 8 will give you a time delay of up to 128×100 seconds or more than 200 minutes!

The selected output of the XR-2240 is inverted by $Q1$ and coupled through $C4$ to the 555 monostable, a circuit essentially identical to the monostable in Figure 3. The timing period of the monostable is controlled by the time constant $R6 C5$.


The XR-2240/555 interval timer is far more versatile than the dual 555 or 556 version because intervals of several hours can easily be obtained. Calibrating the circuit, however, can pose problems if you attempt to perform the operation when output pin 8 is selected. Calibration is much easier if you select output pin 1. If, for example, you want a timing interval of one hour (3600 seconds), adjust $R1$ until the interval at pin 1 is 28.13 seconds. Pin 8 will then output a pulse at 128×28.13 seconds or every 3600 seconds.

Incidentally, it's possible to select various combinations of XR-2240 outputs to achieve any time interval of from T to $255T$ when the chip is operated in its triggered, monostable mode. However, this procedure does not give the desired results when the astable mode is used.

It might be possible to obtain the full versatility of the XR-2240 by operating the chip in its one-shot mode and triggering it externally. The XR-2240 would continue to trigger the 555 one-shot to provide the brief "on" time after each interval. The time delay would be selected by shorting combinations of outputs to a common bus. The delay would be the sum of the delays of the selected outputs. Thus, outputs $4T$, $8T$ and $128T$ will give a total delay of $4 + 8 + 128$ or $140T$.

I'll leave the details to those readers who like challenges. See the XR-2240 data sheet for design tips. \diamond

Fig. 5. Long-duration, programmable interval timer employs XR-2240 as an astable and 555 as a monostable. Relay $K1$ keys external circuit.

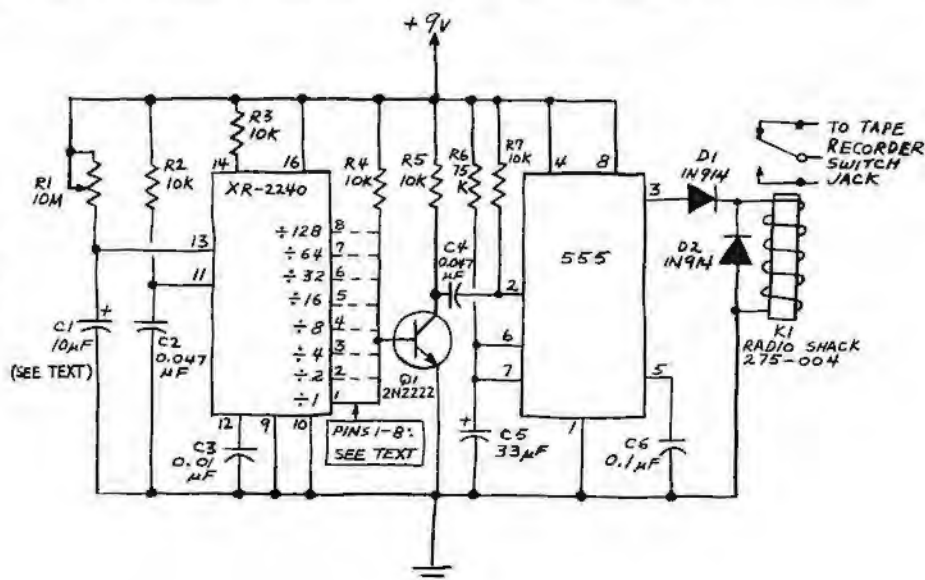



Kitbuilding is easy and fun for the whole family...send for your new

FREE **HEATHKIT**
CATALOG
TODAY



Send me my FREE Heathkit Catalog.
I am not currently receiving your catalogs.

Heath Company, Dept. 010-560, Benton Harbor, MI 49022

Name _____

Address _____

City _____

State _____ Zip _____

POPULAR ELECTRONICS

PC-132



ALL
THAT'S
NEW
IN THE
WORLD
OF KITS

Nearly 400 fun-to-build money-saving electronic kits your family will enjoy for years to come.

**free
heathkit[®]
catalog**

**PLACE
STAMP
HERE**

The Post Office will
not deliver mail
without postage

HEATH COMPANY

Benton Harbor MI 49022

Build better value with world-famous Heathkit Electronic Products

SEND FOR YOUR NEW

FREE HEATHKIT CATALOG

Read about the world's largest selection of fun-to-build, money-saving electronic kits — plus educational programs so effective they're guaranteed!

Every Heathkit product is quality designed and engineered, and gives you extra value because you build it yourself. Our world-famous instruction manuals take you step-by-step from unpacking the kit to final plug-in. They're marvels of technical accuracy and thoroughness. Find out about the pride, satisfaction and savings you can get by building your own electronic kits. Send for your catalog today!

Nearly 400 quality electronic kits including:

• Hobby and Business Computers • Color TV • Stereo Components • Test Instruments • Amateur Radio Gear • Metal Locators • Automotive Instruments • Marine Gear and Accessories • Aircraft Instrumentation • Home Convenience Items • Security • R/C Modeling Equipment • Clocks • Weather Instruments • Tools... and much more

Send for it TODAY



NEW! One-Button Dialer
Real convenience for any telephone.



NEW! All-In-One Computer System
Desktop computer with Terminal, Floppy Disk, and Keyboard in one compact unit.

NEW! Deluxe Metal Locator
Adjustable discrimination for finding any kind of metal.

NEW! DC to 5MHz Oscilloscope
Low-priced scope great for TV service.



NEW! Low-Priced Multimeter
Great for hobbyist or service bench.

NEW! Auto-Ranging Digital Multimeter
Automatically selects proper range for best measurements.



NEW! CW Transmitter
Deluxe transmitter with famous Heath value.



NEW! X-Y Chart Recorder
Two channels for comparison plotting.



If coupon is missing, write:
Heath Company, Dept. 010-560 Benton Harbor, MI 49022

Heathkit products are displayed, sold and serviced coast-to-coast at Heathkit Electronic Centers (Units of Schlumberger Products Corporation). See the white pages of your phone book.

HEATH
Schlumberger

Heath Company, Dept. 010-560
Benton Harbor, Michigan 49022

Please send me my FREE Heathkit Catalog.
I am not currently receiving catalogs.

Name _____

Address _____

City _____ State _____

CL-708 Zip _____

**FREE
CATALOG!**

The world of electronics gee-wizardry



-YOURS FREE.

32-pages of test instruments—from the latest digital multimeters to the famous EICO scopes. Security systems. Automotive and hobbyist products. Kits and assembled. EICO quality. EICO value. For FREE catalog, check reader service card or send 50¢ for first class mail.

EICO 108 New South Road
Hicksville, N.Y. 11801

CIRCLE NO. 19 ON FREE INFORMATION CARD

Hobby Scene



By John McVeigh, Technical Editor

ANTENNA LENGTH CALCULATIONS

Q. I am writing with reference to your article, "Choosing a Mobile CB Antenna," which appeared in the April 1978 issue. In the article, it was stated that at CB frequencies, a vertical half-wave dipole would have a length of 5.2 meters. Using the formula $\lambda = c/f$, with $c = 2.9971 \times 10^8$ m/s (speed of light in air) and $f = 27.0$ MHz, I come up with $\lambda = 11.10$ meters, or a half-wavelength of 5.55 meters. Working backwards, I find the frequency corresponding to a half-wavelength of 5.2 meters to be 28.818 MHz, which isn't even close to actual CB frequencies. Could you explain to me why this difference exists? I have searched through my technical references, but have been unable to come up with an answer. —Jim Sloat, Calgary, Alberta, Canada.

A. Your calculations are correct, but the length of a "half-wave" antenna is not exactly one half-wavelength. Rather, a resonant dipole has an electrical length of one half-wavelength. The length of conductor required for a resonant antenna depends on several factors, including the ratio of its length to its diameter. The smaller the ratio (the thicker the conductor), the shorter the antenna for a given electrical length. Practically speaking, the diameter of the conductor accounts for a 2-to-5-percent shortening.

The end effect also reduces antenna length. That is, the strain insulators and wire loops wound on the insulators (in the case of a dipole) contribute a small amount of capacitance, which lowers the resonant frequency. To compensate, the antenna must be shortened by a few percent.

Finally, your calculations are based on a frequency of 27.0 MHz. Generally, an antenna will best cover a range of frequencies when it is tuned to the center frequency. For the 40-channel Citizens Band, which extends from 26.965 to 27.405 MHz, channel 19 at 27.185 MHz is the median frequency. That's 0.185

MHz above the frequency you used in your calculations and further explains the disparity between my statement and your result.

RFI

Q. I have amateur and CB radio equipment as well as an audio system. Whenever I'm recording an 8-track or cassette tape and using one of my rigs, my transmissions come through the stereo system and are recorded on the tape. All the components are well grounded, and I've inserted low-pass filters at the outputs of the transmitters. The problem still exists. What can I do to cure it? —Bill Columa, KA4DAP, Rocky Mount, NC.

A. The space we have here is far too small to permit a detailed discussion of the RFI problem, but what basically happens is this. At some point in the audio system r-f enters and is rectified (detected), giving up the information used to amplitude modulate it. The detected audio is then processed by the rest of the system, which cannot distinguish between it and the desired audio signals.

The key to solving an RFI problem is to locate the point of entry and treat it with shielding and/or filtering. I wrote a comprehensive article on the RFI problem for the May 1977 issue of our sister publication *Stereo Review*. That article contained a methodical, step-by-step procedure for eliminating RFI, and I suggest you either locate that issue or order a reprint of the article (ask for Reprint No. 21) at a cost of \$1.50 from Stereo Review Reprints, Box 278, Pratt Station, Brooklyn, NY 11205. Residents of CA, CO, DC, FL, IL, MI, MO, NY, TX, or VT must add applicable sales tax. P.S.—I don't get royalties on reprint sales!

Have a problem or question in circuitry, components, parts availability, etc? Send it to the Hobby Scene Editor, POPULAR ELECTRONICS, One Park Ave., New York, N.Y. 10016. Though all letters can't be answered individually, those with wide interest will be published.

Put Professional Knowledge and a COLLEGE DEGREE in your Electronics Career through

HOME STUDY

Earn Your DEGREE

by correspondence, while continuing your present job. No commuting to class. Study at your own pace. Learn from complete and explicit lesson materials, with additional assistance from our home-study instructors. Advance as fast as you wish, but take all the time you need to master each topic.

The Grantham electronics degree program begins with basics, leads first to the A.S.E.T. degree, and then to the B.S.E.T. degree. Our free bulletin gives complete details of the program itself, the degrees awarded, the requirements for each degree, and how to enroll. (We are located at 2500 S. LaCienega Bl., Los Angeles, Calif.) Write to our mailing address shown below for Bulletin E-79.

Grantham College of Engineering
P. O. Box 35499
Los Angeles, California 90035

Worldwide Career Training thru Home Study
CIRCLE NO. 27 ON FREE INFORMATION CARD



Product Test Report

Compucolor II Model 4 Personal Computer System



Has full graphics
and built-in floppy-
diskette drive

AMONG THE few small computing systems that provide color graphics is the Compucolor II from Compucolor Corp. (Address: 5965 Peachtree Corners East, Norcross, GA 30071; Tel: 404-449-5861). Several versions of this computer are available, offering a variety of optional RAM, keyboards, single and multiple disk drives, etc. These are basically two-package systems consisting of a 13" (33 cm) diagonal color monitor and disk drive in one and a keyboard/computer system in the other package. The two are interconnected via a single 30" (76.2 cm) long multiconductor flat ribbon cable.

We evaluated the Model 4 version of the Compucolor II, configured with 16K of user-available RAM and a single 5¼" floppy-disk drive. The optional 101-key Model 101 Extended Keyboard was substituted for the Standard 72-key keyboard. In addition to the standard 72 keys, the Extended Keyboard has a separate four-function calculator-type cluster, and a cluster of editing keys. (There is also an optional Deluxe keyboard with

117 keys and offering extended plotting capabilities available at extra cost).

The keyboard/computer package measures 19" (48.3 cm) wide by 7" (178 mm) deep and slopes from 4" (102 mm) high at the rear to 2" (51 mm) at the front. The monitor/disk drive package measures 18" wide by 15" deep by 13" high (457 x 381 x 330 mm). Price of the Model 4 with a Standard Keyboard is \$1695, plus \$135 when substituting the Model 101 Extended Keyboard.

Technical Details. The computer is based on an 8080A operated with a 2-μs cycle time. It can support up to 65K of memory, and has on-board space for 32K. There is 16K of ROM in which are the operating system and BASIC, and sockets are provided for additional 8K of ROM. The system is designed to use up to 480 I/O ports, 30 of which are implemented in the standard computer. This number includes an RS-232C serial port for printer or modem, with a broad selection of baud rates.

The graphics display features an 8-



fact:
**it's easy to upgrade
your M95 cartridge
and gain dramatic
freedom from
distortion**

One of the critically acclaimed advances introduced in Shure's incomparable V15 Type IV phono cartridge is its revolutionary and unique distortion-reducing Hyperelliptical diamond stylus.

The Hyperelliptical stylus contacts the groove in a "footprint" that is narrower than both the Biradial (Elliptical) and the long-contact shapes such as the Hyperbolic. The performance features of this new tip geometry are now available to owners of M95ED or M95G cartridges by simply upgrading either with a Model N95HE Hyperelliptical stylus.

You'll find the cost extraordinarily low—but the difference in sound will be immediately apparent. The new stylus takes only seconds to install with a simple, no-tools procedure.

The Hyperelliptical stylus is also available in a brand new, ultra-flat frequency response, high trackability cartridge: the M95HE. Write for free brochure (AL600).

N95HE Improvement Stylus



Shure Brothers Inc.
222 Hartrey Ave., Evanston, IL 60204
In Canada:
A. C. Simmonds & Sons Limited

MANUFACTURERS OF
HIGH FIDELITY COMPONENTS,
MICROPHONES, SOUND SYSTEMS AND
RELATED CIRCUITRY.
CIRCLE NO. 47 ON FREE INFORMATION CARD

color selection on a 10" by 7" (254 x 178 mm) usable screen area. The 128 x 128 graphics is refreshed at power-line frequency. Alphanumerics consist of 32 lines of 64 characters/line for small-size capital letters or 16 lines of 64 characters/line with large-size caps. Lower-case letters are not included, but 64 spe-

cial graphic symbols are.

Conventional 40-track diskettes are used with an average access time of 40 ms for 40 tracks, while average latency is 200 ms. Data transfer rate is 76.8K bits per second, with a diskette storage capacity of 51.2K bits per side (both sides usable).

The basic keyboard is standard ASCII four-level with 192 codes. It uses gold crossbar keyswitches of commercial quality. CPU reset and automatic diskette loading keys are included.

In software, a complete disk operating system as well as disk BASIC are in ROM. The BASIC is similar to most other disk BASICs and has 32 statements and commands, 19 mathematical functions, nine string-manipulation functions, and 12 disk-file commands. Calculations are to five decimal places.

The operating system has 31 CONTROL-plus-key commands, 31 ESCape-plus-key codes, and 12 graphic-plot commands. There is also a full complement of CRT Terminal commands as well as full-function foreground/background color selection along with 15 plot commands. This wide variety of commands gives the user control over every possible function of the computer.

Most of the keys are assigned two functions. Switching from one function to the other is via the CAPS LOCK key. Some keys are used in conjunction with the CONTROL and ESC keys. Those keys that permit color changes are color coded with their respective colors.


A 50-pin bus connector (located on the rear) provides all addresses, data, clocks, etc., to allow the Compucolor to be extended with any upcoming peripherals. Also located on the rear apron is a connector for RS-232C signals. This latter port can also be used for a printer or modem. Each connector is fully described in the manual.

A large loose-leaf-type "Programming and Reference Manual" is supplied with the system. This manual contains 10

THE BIG PLUS + Graphic Equalizer

ASSEMBLED
\$189⁹⁵

KIT
\$99⁹⁵



LOADED with Quality Features!

- Stereo . . . Eleven Bands Per Channel • Extremely Low Noise & Distortion • LED Peak Indicators • Center Detent ("flat") sliders • Built-in "record" Switching • Line and Microphone Level Inputs/Outputs • Regulated Power Supply • Fully Guaranteed • Horizontal or Vertical Cabinets • Kit or Fully Assembled • Plus Much, Much More!

Absolutely equals or exceeds overall performance and features of any graphic equalizer made today!

AARON-GAVIN INSTRUMENTS, INC. 714-957-8710

17231 Corla Avenue

Tustin, California 92680

Yes! I've enclosed \$_____; RUSH me:

_____ assembled equalizers at \$189.95, p.p.d.

_____ unassembled equalizer kits at \$99.95, p.p.d.

California residents include 6% sales tax

cabinet ☐ send brochure ☐ Rack

☐ Horizontal (flat) ☐ Vertical (up-right) ☐ Mount

Visa & Master Charge orders accepted

Name _____

Address _____

City _____ State _____ Zip _____

Card No. _____

Exp. _____

Date _____

Bank _____

No. _____

Dealer inquiries invited

CIRCLE NO. 3 ON FREE INFORMATION CARD

**For more
information
on
advertised
products,
equipment
tested, etc.,
circle
appropriate
number
on
postpaid
Free
Information
Card.**

ATTENTION! Radio-Shack and Heath Kit Owners!

**Centronics
779-1**



\$954.00

**Anadex
DP-8000**



\$995.00

**Texas Instrument
810 Printer**



\$1599.00

**Hazeltine
1400**



\$699.00

**Centronics
Micro-Printer**



\$495.00



SYNCHRO-SOUND

ENTERPRISES, INC.

The Computer People

193-25 Jamaica Avenue, Jamaica, New York 11423

212/468-7067 TWX 710-582-5886

Hours 9-4 Daily
and Saturday

Visit our new showroom
Working units on display

BankAmericard Master Charge

sections that cover full details for using the BASIC language (and covers programming examples), print formatting, and machine-level interfaces for the disk BASIC. The disk-manipulation system is spelled out in detail, as are all color and graphics techniques and the file control system (ECS).

The Manual concludes with seven appendixes that contain in-depth discussions of the disk BASIC, file control system, CRT commands, internal features of the computer, an ASCII value table, and the Compucolor alphanumeric and graphic character set, along with other documentation.

User Report. The Compucolor is a complete computer. Simply unpack the two sections, interconnect them via the flat ribbon cable, plug the line cord into an ac outlet and turn on the power. That's all there is to getting the system up and ready to go in either the operating system or BASIC.

To use a diskette, simply insert the diskette in the drive, close the drive door, and press the AUTO key on the keyboard. In just a couple of seconds, the disk "menu" pops up on the screen.

The graphics display was clean and sharp with bright colors. The overall quality of the graphics was excellent due to good convergence and the fact that the monitor bandwidth is better than that of a conventional color-TV receiver. One of the major advantages of the color monitor is that optically disturbing moire patterns (from nearby TV transmitters on adjacent channels or local or mobile hams and CBers) are not seen on-screen. Also, this approach provides an apparent increase in bandwidth since the monitor is not bandwidth-limited by r-f or sound circuits. The CompuColor "Sampler" program on diskette demonstrates the system's graphics capability.

The keyboard was a dream to operate. It has a positive professional "feel" and operated flawlessly.

Having had experience with other BASICs, we found Compucolor's version easy to use. It is a fast BASIC and is broad enough to easily adapt to programs written in other BASICs, except where unique symbols are used.

After working some of the programming examples given in the Manual, we typed in several game programs incorporating color graphics. This is quite easy to do, as a single keystroke can be used to change colors, flash symbols, invert and do other formerly difficult graphics "tricks." These keystrokes can

be written into the program.

We also adapted a couple of simple business programs to the color format, making them much easier to read and interpret. Credits and debits for example, are much easier to follow when they are color-coded.

The bottom line here is that the addition of color to a video display does make working and playing with a computer much more pleasant and exciting.

CompuColor is supporting its system with lots of software (diskettes), includ-

ing a large variety of color games, text editor, assembler, and several money-management programs.

In our opinion, the Compucolor II is an excellent choice for a computer system to start and stay with for home use. It is very flexible, thanks to its built-in disk drive, and has sufficient on-board memory to handle just about any length programs. This is a lot of computer for the money. —Leslie Solomon, *Technical Director*

CIRCLE NO. 104 ON FREE INFORMATION CARD



The DMM you've wanted: Quality and performance at a low, low cost

A surprisingly low \$69.95. Surprising because you get the type of performance you've wanted but expected to pay much more for.

Quality, Performance and Accuracy

The 2010A offers you long-term accuracy with a laser-trimmed resistor network, a stable bandgap reference element, and single-chip LSI circuitry. With 31 ranges and 6 functions, you can measure AC or DC volts from 100 μ V to 1000V; AC and DC current from 0.1 μ A all the way to 10 A; resistance from 0.1 Ω to 20 M Ω . Typical DCV and Ohms accuracy is 0.1% \pm 1 digit. Easy-to-read 3 1/2 digit LED's with 9mm numerals and automatic decimal point.

Extra features for greater convenience and flexibility

- Unique X10 multiplier switch gives you convenient selection of the next higher decade. Hi-Low Power Ohms capability gives you three high-ohm ranges that supply enough voltage to turn on a semiconductor junction. You use the three low-ohm ranges for in-circuit resistance measurements.

- **Wide Frequency Response:** 40 Hz to 40 kHz bandwidth lets you measure audio through ultrasonic AC signals.

- **Touch-and-Hold Capability** (with optional probe) lets you hold readings as long as you wish so you can make measurements in hard-to-reach places without taking your eyes off the probe tip.

- And More: automatic polarity and zeroing; overrange indication; overload protection on all ranges.

This compact unit is powered by 4 "C" cells (not included) so that you can take your laboratory benchtop unit anywhere with you.

Kit or Factory-Assembled

Either is a tremendous value. Complete kit only \$69.95; assemble it yourself with our easy-to-follow instructions. Or, for only \$99.50, Sabtronics will ship your 2010A factory-assembled and calibrated.

Whether you're a professional or a hobbyist (or both!): When quality, accuracy, and price count, you should check out the 2010A DMM for yourself. Order one today for a full 10 days to inspect it; if you're not completely satisfied, merely return it in its original condition for a prompt and courteous refund of purchase price. Call with your Master Charge or Visa number or write the address below.

2010A Kit: \$69.95 (plus \$4.00 S&H)

2010A Assembled: \$99.50 (plus \$4.00 S&H)

AC-115 Adaptor: \$7.50


NB-120 Nickel Cadmium Batteries: \$17.00

THP-20 Touch and Hold Probe: \$18.00

Making Performance Affordable

sabtronics 
INTERNATIONAL INC.

13426 Floyd Circle M/S 24 Dallas, Texas 75243
Telephone 214/783-0994

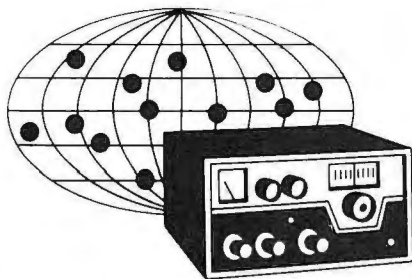

DX Listening

By Glenn Hauser

WARC-79

THIS FALL, the World Administrative Radio Conference (WARC) in Geneva will reallocate the entire radio spectrum, in keeping with anticipated needs through the end of the century. Of prime concern to DX listeners is the proposed reallocation of the shortwave spectrum to allow more space for broadcasting.

Fixed (point-to-point) communication has largely switched to satellites in the past 15 years. This trend will no doubt continue. At the same time, the relatively small shortwave broadcast bands have become overloaded to about three times their capacity. This is why co- and adjacent-channel interference has become the rule rather than the exception. It would appear, then, that the natural solution would be to turn over a portion of the fixed bands to broadcasting. But it's not that simple. There are many other claimants to the hf spectrum (such as Amateur Radio), and different countries have different priorities.

For the past few years, the FCC has sponsored a series of meetings by the International Broadcasting Service Group, to help it determine exactly what should be the US position at WARC. In April, the IBSG issued its final proposal and disbanded, its mission completed.

The world is divided into three broad regions for allocation purposes. Region 1 includes Europe, Africa, the Mideast, and the USSR. Region 2 consists of North and South America. Region 3 is comprised of the rest of the world, which includes Asia and the Pacific.

The IBSG proposes that international broadcasting between 5.8 and 22 MHz should be expanded by 93% in Region 2, and 80% elsewhere, very nearly a doubling of available in-band space, from the present total of 2350 kilohertz to 3940 kilohertz.

Since Third World countries hold the balance of power at WARC, the US position also proposes a 60% expansion of bands for tropical broadcasting by adding five new tropical bands in the 3-to-14-MHz range and making all tropical bands, new and old, exclusively for tropical instead of international broadcasting. No changes are proposed between 3.0 and 5.8 MHz, either in tropical or international bands. The five proposed new tropical bands, totalling an addition of 300 kHz are: 5850 to 5900 kHz, 7500 to 7550 kHz, 9825 to 9875 kHz, 11,500 to 11,550 kHz, and 13,900 to 14,000 kHz. These are adjacent, or almost adjacent, to existing or newly proposed international broadcasting bands, for the convenience of listeners, receiver designers, and existing transmitting equipment.

In the proposed new international broadcasting band allocations, all existing bands (except 25 MHz) are expanded, and two totally new bands are added. These new bands would further relieve congestion on adjacent bands and make better use of prevailing maximum useable frequencies. This

expansion totals 1290 kilohertz, as follows:

Proposed (kHz)	Present (kHz)
5900-6200	5950-6200
7250-7500	7100-7300 (not Region 1)
9375-9825	9500-9775
11550-12000	11700-11975
13600-13850	none
15100-15700	15100-15450
17600-17900	17700-17900
19750-19990	none
21450-21800	21450-21750
25850-26100	25600-26100

The US position calls for selective sharing between fixed services and broadcasting in all added band space. However, it is not considered likely such sharing will be adopted by the Conference this fall.

The US position also urges, but does not give a specific date for, adoption of single sideband for international broadcasting. But this change is not likely in the near future. Also being considered are power limits of 50 kW for domestic operations and either 250 or 500 kW for international operations. While this may seem excessive, it is realistic. There are already some instances of a full 1000 kW and even 1250 kW being used in some situations.

Our thanks to Lawrence E. Magne, member of the IBSG, for supplying this information.

Moscow via Cuba. The USSR has long been the target of American broadcasts from such nearby countries as Greece, Germany, and Britain. Now, more than 20 years after the triumph of the socialist revolution in Cuba, *Radio Moscow* has begun transmitting in English to North America via Cuba.

We first noted the foregoing arrangement on April 22, Lenin's 109th birthday, as the "newscasts" reminded us every half hour.

The Moscow signals were and are the strongest on the bands during the daytime. This, combined with their steady strength even during ionospheric disturbances that block direct reception from the USSR, made it obvious that a relay was in use. *Radio Moscow* characteristically made no public announcement of the new relay, nor has it ever been publicly admitted that some of its other broadcasts to North America are relayed via Bulgaria.

Why wasn't the Cuban connection made use of long ago? Cuba has been making full use of its shortwave facilities, but there has always been a shortage of power and spare parts, and there has been no reliable way of feeding the Moscow audio to Cuba. Now, however, Cuba has a satellite link with Moscow and finds it advantageous to dedicate one of its

transmitters to Soviet broadcasts to North America. In return, a Soviet transmitter is dedicated to Cuba's broadcasts to the Mediterranean area.

Radio Moscow thus becomes the international broadcaster with the most hours per day beamed to North America, surpassing the BBC by far. And with this Cuban relay on one good frequency at a time, we may hope that *Radio Moscow* will no longer find it necessary to use a dozen different frequencies on direct broadcasts from the USSR.

Publications. For a list of club publications and services, send a legal-size SASE with 28¢ postage to ANARC, 557 N. Madison Ave., Pasadena, CA 91101.

FRENDX, the shortwave broadcast journal, provides a great deal of timely schedule, logging, and QSL information plus receiver reviews and nontechnical articles. Sample \$1, subscription \$13, from NASWA, Box 13, Liberty, IN 47353.

Review of International Broadcasting, a monthly listeners' magazine emphasizing free discussion of programming and issues affecting the DX listening hobby (an approach lacking in other publications) is \$1 a sample or \$12 a year from Glenn Hauser, Radio WUOT, Knoxville, TN 37916.

The World in My Ears, is a new book by well-known New Zealand DX listener Arthur Cushen, who, despite blindness, has been very successful in shortwave, to the point of being knighted. For information, contact Cushen direct, at 212 Earn St., Invercargill, New Zealand.

August BBC World Service. Among the many fine BBC

programmes planned this month are these (dates and times GMT): "Play of the Week," August 5 at 0030 and 1130 presents the winning entry in the World Service Drama Competition. "On Their Majesties Most Secret Service," four programs on the history of British espionage, Saturdays at 1130, Tuesdays at 2030, Wednesdays at 0230. "The Art of the Whodunit," on the history of detective fiction, Saturdays at 0815 and 1315, Sundays at 2015, Mondays at 0315. "Venice Preserved," week of August 20, Monday at 0945 and 2130, Thursday at 1430. Week of August 27 at same times, "Pompeii." Week of August 26, Sunday at 1830, Monday at 0100, Tuesday at 1345, "A Thurbur Carnival." "Behind Every Great Man . . .," Saturdays at 0430, Mondays at 0815 and 2315. (Subject to change).

Updating Listings. The following changes and additions should be made in the "English Broadcasts" listings that appeared in the June issue:

GMT	Station	Frequencies, changes
1000-1030	R. Korea	11725, 9580
1000-1300	R. Moscow	9600 (via Cuba)
1000-16QZ	ABC, Perth	9610
1030-1300	CBC Northern Service	9625, 6065 not 11720
1100-1115	R. Pakistan	21655, 17662
1100-1330	BBC	add 21660; 11775 at 1100-1130 & 1300-1330 only
1100-1500	R. Moscow	delete



John Simonton's time-proven design provides two envelope generators VCA, VCO & VCF in a low cost, easy to use package.

Use alone with its built-in ribbon controller or modify to use with guitar, electronic piano, polytonic keyboards, etc.

The perfect introduction to electronic music and best of all, the Gnome is only \$59.95 in easy to assemble kit form. Is it any wonder why we've sold thousands?

- () Send GNOME MICRO-SYNTHESIZER Kit (\$59.95 plus \$2.00 postage)
- () GNOME MICRO-SYNTHESIZER (Fully Assembled) \$100.00 plus \$2 postage
- () Send FREE CATALOG

name: _____

address: _____

city: _____ state: _____ zip: _____

BAC/VISA MC card no. _____

BA&A DEPT. 8P 1020 W. WILSHIRE, OKLAHOMA CITY, OK 73116

CIRCLE NO. 43 ON FREE INFORMATION CARD

Build The World's Most Powerful 8-Bit Computer

Featuring The Famous Intel 8085!

Explorer/85™


Starting for just \$129.95 you can now build yourself a sophisticated, state-of-the-art computer that can be expanded to a level suitable for industrial, business and commercial use. You learn as you go . . . in small, easy-to-understand, inexpensive levels!

- Features Intel 8085 cpu/100% compatible with 8080A software!
- Onboard S-100 bus (up to 6 slots)!
- Onboard RAM and ROM expansion!
- Built-in deluxe 2K Monitor/Operating ROM!
- Cassette/RS 232 or 20 mA J4-1/2 8-bit parallel I/O and timer all on beginner's Level "A" system!

EXPLORER/85 gives you "big computer" features immediately, without turning you into an appliance operator, doomed to run pre-developed software for life. Simply connect EXPLORER to a terminal, video monitor or tv set and 8 volt power supply and start running programs, the very first night! Level "A" teaches you machine language and computer fundamentals. It lets you run exercise programs including programs to examine the cpu registers, examine memory, fill memory, move memory and make up games. You can load and play back these programs on an ordinary tape cassette—and display your efforts on any tv screen, video monitor or printer. (\$8.95 RF modulator required for tv use.) The simplified architecture of the Intel 8085 makes EXPLORER far easier to understand than computers using the older, more complex but less powerful 8080A. Then, when you're ready, EXPLORER can be expanded—by you—to rival the power of any 8-bit computer on earth. Or you can customize it to perform a dedicated task, thanks to onboard prototyping, RAM and ROM expansion capabilities.

LEVEL "A" SPECIFICATIONS

EXPLORER's Level "A" system features an advanced Intel 8085 cpu, which is 50% faster than its 8080A predecessor, yet 100% compatible with 8080A software, which, you'll discover, exists by the ton. "Big computer" features include an 8355 ROM with 2K deluxe monitor/operating system which has two programmable 8-bit bi-directional parallel I/O ports, built-in cassette interface with tape control circuitry to allow labeling cassette files, and commands which include: "display contents of memory," "run at user location (go to)," "insert data," "move contents of memory," "examine registers individually or all," "fill command (to fill the contents of memory with any variable), automatic baud rate selection, programmable characters per line display output format, and more! An 8155 RAM—I/O chip contains 256 bytes of RAM, two programmable 8-bit bi-directional and one programmable 6-bit bi-directional I/O ports plus programmable 14-bit binary counter/timer, user interrupt and reset switches. Onboard expansion provisions exist for up to six S-100 boards, 4K of RAM and 8K of ROM, PROM or EPROM.

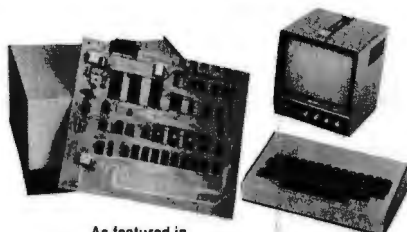

As featured in
POPULAR ELECTRONICS
EXPLORER/85 shown with Video Monitor and Keyboard/Video Terminal.

CHOICE OF HEX KEYPAD OR TERMINAL INPUT

If you plan to customize EXPLORER for dedicated use, we recommend that you order hex keypad input. But, if you are planning to go whole hog and blow EXPLORER up into a full size, state-of-the-art system with 8K or extended basic (coming soon), up to 64K of memory, floppy disks, telephone interface, printers, and all sorts of S-100 plug-ins—you'll be better off with the Keyboard/Video Terminal input. The \$149.95 EXPLORER Keyboard/Video Terminal includes full ASCII decoding with 128 ASCII upper/lower case set, 96 printable characters, onboard regulators and selectable display formats—32x16 for tv set or 64x16 for video monitor (not included).

EXPAND EXPLORER, LEVEL-BY-LEVEL

Level "B", at \$49.95, adds S-100 signals plus onboard RAM/ROM decoding. Includes all parts necessary to generate the signals for S-100 bus accessories. Just add two S-100 bus connectors and you have a complete S-100 compatible computer with a world of add-ons at your fingertips. Choose from hundreds of products to satisfy your individual needs. Level "B" kit also includes the address decoders for onboard RAM and ROM expansion, which are addressable anywhere in the 65K field.

Level "C" expansion, at \$39.95, expands the S-100 bus to allow a total of six S-100 cards to be plugged into EXPLORER's motherboard and contained in EXPLORER's steel cabinet, includes all hardware, mounting brackets, board guides, etc. Just add the number of S-100 bus connectors you need.

Level "D" expansion, at \$69.95, gives you 4K of onboard static RAM utilizing 2114 IC's. Your board will also accept four 2716 EPROM's, which can be purchased separately. You now have an advanced mainframe that can be customized with the peripherals of your choice to fit any (or all) specific requirements. Each level of EXPLORER is separately regulated for the ultimate in stability. Factory service is available from Netronics. Order your EXPLORER today!

ORDER FROM THIS COUPON TODAY!

Netronics R&D Ltd., Dept. P.E.B., 333 Litchfield Road, New Milford, CT 06676

<input type="checkbox"/> Level "A": EXPLORER/85 kit (specify □ terminal or □ hex keypad input), \$129.95 plus \$3 p&h.	<input type="checkbox"/> Deluxe Steel Cabinet for EXPLORER/85, \$39.95 plus \$3 p&h.
<input type="checkbox"/> Power Supply kit, 5 amp, ±8 volt, \$34.95 plus \$2 p&h.	<input type="checkbox"/> Deluxe Steel Cabinet for Keyboard/Video Terminal, \$19.95 plus \$2.50 p&h.
<input type="checkbox"/> Intel 8085 User's Manual, \$7.50 ppd.	<input type="checkbox"/> RF Modulator kit, \$8.95 ppd.
<input type="checkbox"/> ASCII Keyboard/Video Terminal kit, \$149.95 plus \$3 p&h.	<input type="checkbox"/> Total Enclosed (Conn. res. add tax) \$_____
<input type="checkbox"/> Hex Keypad kit for hex version, \$69.95 plus \$2 p&h.	<input type="checkbox"/> VISA <input type="checkbox"/> Master Charge Exp. Date _____
<input type="checkbox"/> Level "B": S-100/Onboard RAM/ROM Decoder kit (less S-100 connectors), \$49.95 plus \$2 p&h.	Account # _____
<input type="checkbox"/> Level "C": S-100 S-Card Expander kit (less connectors), \$39.95 plus \$2 p&h.	PHONE ORDERS CALL (203) 354-9376
<input type="checkbox"/> S-100 Bus Connectors (gold), \$4.85 each.	Name _____
<input type="checkbox"/> Level "D": 4K Onboard RAM kit, \$69.95 plus \$2 p&h.	Address _____
	City _____
	State _____ Zip _____

CIRCLE NO. 40 ON FREE INFORMATION CARD

1200-1255	R. Peking	9820, not 11685	2305-2320	Austrian R.	12015, 9770, 5945 (Sun.), not 0300-0315
1215-1230	V. of Greece	17785, not 17830 and 15345	2330-2400	R. Finland	11800 not 11735
1220-1250	R. Ulan Bator	9575 not 6383	0000-0030	R. Can. Int.	5960
1230-1255	Austrian R.	17860, not 21530	0000-0100	VOA	not 25990
1230-1300	R. Sweden	21690, 21615, not 21700	0000-0100	R. Sofia	15330
1300-2300	CBC Northern Service	11720, 9625, not from 1030	0000-0500	FEBC, Philippines	17810
1330-2200	R. Moscow	11840 (via Cuba)	0015-0100	BRT, Belgium	11715, not 6080
1400-1430	R. Norway	21730, not 15175	0030-0100	R. Sweden	15290, not 11905
1400-1600	AFRTS	15430, not 15425	0030-0100	R. Kiev	15525, 11735, 9800
1430-1500	R. Finland	17785, not 21475	0100-0120	RAI, Italy	11800, not 11810
1500-1600	V. of Rev. Ethiopia	9560, not 9615	0100-0130	R. Can. Int.	17820, not 11940
1500-1700	R. Moscow	delete	0100-0145	R. Berlin International	11970 not 11805
1515-1530	V. of Greece	not 15345	0100-0430	AFRTS	17765, not 25620
1530-1600	R. Yugoslavia	add 15295	0100-0500	WYFR	9715, not 5985
1530-1630	V. of Vietnam	15012, 14990, not 12035 and 9840	0130-0155	Austrian R.	5945, not 6155
1600-1615	R. Pakistan	21755, 21545, not 21735 and 21595	0130-0200	R. Budapest	17710, 15225 (Wed & Fri)
1600-1630	R. Korea	add 11830, not 9780, 9640, 7150	0130-0230	R. Japan	15270, not 15195
1600-1800	VOA	add 25880	0200-0230	R. Can. Int.	11940, not 9535
1610-1655	BRT Belgium	21475 and 17745, not 17740	0200-0230	R. Norway	add 11870
1700-1800	HCJB, Ecuador	17765, not 17890	0200-0230	R. Budapest	add 17710, 15225, not 15220
1700-2300	WYFR	17845	0200-0300	R. Moscow	add 12030, 9600
1800-1830	R. Korea	15255, 11830, not 9780 or 9720	0200-0300	R. Bras	15290, not 15280
1800-1900	V. of Nigeria	15185, 15120 not 11770, not to 1930	0215-0230	V. of Greece	9655, not 9760
1800-0815	R. New Zealand	17860	0230-0300	R. Lebanon	15285, not 15440
1830-1900	R. Nationale, Guinea	15310 (varies) Mon & Fri only	0230-0300	R. Korea	15350
1900-1915	R. Japan	15270, not 15105	0230-0300	R. Sweden	15290, not 9695
1900-1930	R. Can. Int.	not 11905	0230-0315	R. Berlin International	11970, not 11805
1900-2000	HCJB, Ecuador	not to 2030	0300-0330	R. Can. Int.	11940, not 9605
2000-2015	R. Japan	15270, not 15105	0300-0330	R. Budapest	add 17710, 15225, not 15220
2000-2030	R. Korea	delete	0300-0330	R. Kiev	11830, 11735, 9800
2000-2030	V. of Islamic Rev., Iran	9139, not 9022	0300-0400	UBC Uganda	delete
2000-2030	R. Can. Int.	15325, not 17875 or 11855	0300-0400	R. Moscow	add 12030, 9600
2100-2115	R. Japan	15270, not 15105	0300-0700	VOA	add 17865
2100-2200	V. of Nigeria	15185, 15120	0330-0355	Austrian R.	5945, not 6155
2100-2300	CBC Radio	17820, 15325 (Mon-Fri), not 17875, not 2200-2300	0330-0450	R. Habana	not 11725
2115-0815	R. New Zealand	delete	0400-0415	R. Budapest	add 17710, 15225, not 15220
2130-2200	R. Can. Int.	17780 and 11940, not 17875, 17820, 15325, 11945	0400-0430	R. Budapest	17710, 15225, etc. (Mon. only)
2130-2200	HCJB, Ecuador	21480, 17790, 15295	0400-0430	R. Can. Int.	add 11845
2130-2200	R. Sofia	15135, 11750, not 11920, 11860	0400-0445	FEBA, Seychelles	11805
2200-2400	AFRTS	17765, not 25620	0430-0455	Austrian R.	15260, not 5945
2300-2330	BBC	not 5975	0430-0500	R. Sofia	11750, not 11860
2300-2330	R. Sweden	15290, 11705, not 15205, 9695, 9690	0430-0500	R. Korea	15345, 9755
2300-2330	R. Vilnius	15525, 11735	0430-0700	AFRTS	9755, not 15330, 9685
2300-2330	R. Korea	17860, 15385, 15345	0455-0630	V. of Nigeria	15185, 15120, 7275 or 7255, not 0555-0835
2300-2400	FEBC, Philippines	15450	0500-0515	R. Japan	15270, not 15105
2300-2400	VOA	not 25990	0530-0550	V. of Germany	11905, not 6100
			0600-0615	R. Japan	15270, not 15105
			0615-0630)	R. Canada	11960 and 9635, not 11845,
			0645-0700)	International	11775, 9590, 6045
			0630-0700	R. Korea	delete
			0700-0715	R. Japan	15270, not 15105
			0755-fade	Action Radio, Guyana	5950
			0800-1000	FEBC, Philippines	11765

Note: Frequencies not referred to in a given entry are still correct at presstime. This is a listing of changes only, not giving complete frequency list for any particular transmission. ◇



Software Sources

By Leslie Solomon
Technical Director

6502 Operating System. EXOS (Extended Operating System) for 6502 computers comes in a 4K 2708 PROM and has 20 commands including display, enter, math, memory test, find, fill, move, compare, speed change, load/dump a hex formatted MUST tape, verify, and several "go to" commands. The program is compatible with all MOS Technology TIM systems, or other 6502 computers. Price is \$150. Also available is DATE (Disassembler-Assembler Trace Editor). Source programs can be entered, assembled, edited, traced and disassembled. The trace mode executes the user program one instruction at a time, displays MPU registers, the instruction and the MOST mnemonics. \$150. Both programs \$295. CGRS Mi-

crotech, Box 368, Southampton, PA 18966 (Tel: 215-757-0284).

Jolt Stuff. ERAC (Editor and Resident Assembler Controller) was designed for users of ROM version of the Jolt resident assembler (\$C900-CFFF). ERAC allows source text and object code to be placed anywhere in RAM. Residing in 2K starting at \$0800, 1000 or A800, ERAC is an extension of the RAP. A paper tape is available for \$5, manual \$4.50, and source of \$0800 version is \$12.50. LEDIP (Line Editor Program) is a 1.1K line-oriented text editor that can be expanded. It will output source text suitable for usage with the PROM Jolt Resident assembler (\$E800-EFFF). Paper tape is \$2.75, manual \$3.25, cross assembly \$5. For further information, send \$1 to the 6502 Program Exchange, 2920 Moana, Reno, NV 89509.

8080/Z80 Macro Assembler. This 14K assembler includes a linking loader, library manager and cross-reference facility and assembles over 1000 lines per minute. It supports the Intel standard macro facility and the number of nesting macros is limited only by memory. Code is assembled in relocatable modules. Conditionals may be nested to 255 levels. Other features include comment blocks, variable input radix from base-2 to base-16, titles and subtitles, variable page size, octal or hex listings, PRINTX for printing

assembly or diagnostic messages, and PHASE/DEPHASE to allow code to reside in one area of memory but operate in another. It accepts both 8080 and Z80 opcodes. Price is \$200. Microsoft, 10800 NE Eighth, Suite 819, Bellevue, WA 98004 (Tel: 206-455-8080).

TRS-80 Solar Package. The SUNGRAPH program calculates and plots the sun's local elevation and azimuth for any location on the Earth. It uses TRS-80 Level-II



BASIC, and requires 13K storage. Options include graphs of elevation vs time of day, azimuth vs time of day, maximum elevation vs date and elevation at a specified azimuth and date. Save options allow the graph to be stored on cassette. Cassette is \$49, disk is \$75. Solartek, Box 298, Guilderland, NY, 12084.

THE MICROCOMPUTER MART

COMPUTER RETAIL STORES

Advertisement

CALIFORNIA

Omega Microcomputers
Quality Personal-Business Systems
Apple 11—Alpha Micro
3535 Torrance Boulevard
Suite 10
Torrance, CA 90503
(213) 370-9456

Rainbow Computing
Complete Apple 11 Line
1073 White Oak Avenue
Granada Hills, CA 91344
(213) 360-2171

COLORADO

Byte Shop
Complete Apple 11 Line
3464 Acoma Street
Englewood, CO 80110
(303) 761-6232

FLORIDA

Computer Age, Inc.
Service, Support, Professionalism
At A Very Affordable Price
1308 North Federal Highway
Pompano Beach, FL 33062
(305) 689-3233

Computer Center Of The Palm Beaches
The Microcomputer Specialists
2827 Exchange Court
West Palm Beach, FL 33409
(305) 689-3233

Sara Tech Electronics Inc.
Discounts On All Major Brands
400 Base Avenue
Suite 225
P.O. Box 692
Venice, FL 33515
(813) 485-3559

GEORGIA

Graham Business Computer
Featuring Full Line Ohio Scientific
5725 Buford Highway
Suite 216
Atlanta, GA 30340
(404) 457-8450

MARYLAND

Comm. Center, Inc.
Exidy Sorcerer
Call Toll Free
Laurel Plaza—Ret. 198
Laurel, MD 20810
(800) 638-4486

Computers Unlimited, Inc.
Tomorrow's Technology Today
907 York Road
Towson, MD 21204
(301) 321-1553

MICHIGAN

Computer Center
Business Systems/Personal Systems
28251 Ford Road
Garden City, MI 48135
(313) 422-2570

The Computer Mart
We will Not Be Undersold
560 W. 14 Mile Road
Clawson, MI 48017
(313) 288-0040

NEW JERSEY

Computer Mart of New Jersey
The Microcomputer People (R)
501 Route 27
Iselin, NJ 08830
(201) 283-0600

OHIO

Band-Orch, Inc.
Complete Ohio Scientific Line
337 East State Street
Alliance, Ohio 44601
(216) 821-2600

PENNSYLVANIA

Personal Computer Corp.
First in Pennsylvania
Frazer Mall
Lancaster Avenue and Route 352
Frazer, PA 19355
(215) 647-8453

Ripley Computers
Affordable Computers For
Business/Churches/Home/Personal
126 N. Main Street
Souderton, PA 18964
(215) 723-1509

WASHINGTON

P.S.C. - Computer Systems
Business And Personal Software Systems
546 North 6th
Walla Walla, WA 99362
(509) 529-9331

name _____

address _____

city _____

state _____

zip _____

MAIL THIS COUPON AND WE'LL SEND YOU THE BEST SPEAKER CATALOG YOU EVER READ!

No kidding. Speakerlab's catalog took longer to write than some of our competitors have been in business. In fact, we created an industry by "building great kits so you can afford great speakers." Our catalog is an invaluable



manual of speaker function and design. And, it will introduce you to the finest speaker kits made anywhere...with the strongest money-back guarantee. Find out for yourself...FREE. FREE, that is. Mail the coupon now.

Speakerlab®

Dept. 8-PE, 735 N. Northlake Way
Seattle, WA 98103

SEE YOUR DEALER TODAY

DEMAND THE ORIGINAL

'Firestik'®

"THE FUEL-SEEKER"

THE #1 WIRE-WOUND AND MOST
COPIED ANTENNA IN THE WORLD!

Rugged, Shatterproof Fiberglass...

CB Antennas and accessories for marine, RV, truck, auto, van and motorcycles, etc.

Four Colors: Silver-Gray, Black, Red, and White
Our 17th Year Serving the CB & Communications Market

SEND FOR FREE CATALOG



LIMITED OFFER — USA ONLY

Get this nine-inch 'Firestik' Antenna Wars decal in four beautiful colors on a PAL T-shirt. See your dealer today or send \$3.00 to:

PAL 2614 East Adams | Phoenix, Az. 85034

Name _____

Street _____

City _____

State _____

Zip _____

Dealer & Distributor Inquiries Invited

5-YEAR REPLACEMENT WARRANTY

CIRCLE NO. 44 ON FREE INFORMATION CARD



Computer Bits

By Leslie Solomon
Technical Director

WINDOWS IN THE CRT

THE MOST common way to communicate with a computer today is via a plug-in or a separate video terminal. The ordinary video terminal forms a single "window," in which all you can see is one piece of data at a time as it appears in sequential order on the screen. Recently, we had the opportunity to work with a very special graphics display system called the "Screensplitter" from Micro Diversions, Inc. (8455-D Tyco Rd., Vienna, VA 22180 Tel: 703-827-0888). This novel plug-in video module is not limited to a single window (see photo). Rather, the user can create, under software control, almost any number of data-display windows, each with its own independent display.

Individual windows in the Screensplitter can be sized, labelled, and framed as desired. Furthermore, frame and window can be made to flash, display in reverse video, clear, scroll, and use any

character as a blinking or nonblinking cursor. The window package is contained in an EPROM and has 20 user-callable functions. You can, for example, run a BASIC program and display each subroutine in its own window. Or you can display different data in different windows. You can even move the windows around at will.

If you are doing assembly-language programming, one window can be used as a real-time clock, another to display run time, and others to display register contents or anything else you desire. Debugging information can be contained in its own window. For game playing, you can create as many windows as required. Too, some windows can be dedicated strictly to graphics.

The Screensplitter does not preclude operation as a single window with 40 lines of 80 characters each. Bear in mind, however, that this dense a display



The Screensplitter can generate almost any number of independent "windows" contingent on the needs of the user.

requires a video monitor with at least a 10-MHz bandwidth.


The Screensplitter occupies a single S-100 bus slot. It contains its own 4K of RAM that is memory mapped into the address space so that it can be accessed if you wish to use the window package.

Pascal Microengine. This new computer contains 64K of RAM, two RS-232C ports, two parallel ports, and a floppy-disk controller with DMA. It features self-test diagnostics, Pascal compiler, BASIC compiler, file manager, screen-oriented editor, debugger, and graphics package. Available options include a floppy-disk subsystem, printer, and terminal. Cost at this writing is \$1995. Address: Computer Interface Technology, 2080 South Grand, Grand Center, Santa Ana, CA (Tel: 714-979-9920).

Pet S-100 Interface. The Betsi Interface/Motherboard contains all logic required for interfacing S-100 boards to the Pet microcomputer. It connects directly to the Pet's expansion connector and has four S-100 slots. It does not interfere with the Pet's parallel or IEEE ports. The board also contains a dynamic memory controller that permits use of a 32K RAM board. There are also sockets and decoding circuitry for 8K of 2716 PROM. Price is \$119.00 for the kit, which includes one S-100 connector, or \$165.00 assembled and with four S-100 connectors. Address: Forethought Products, P.O. Box 8066, Coburg, OR 97401 (Tel: 503-485-8575).

S-100 Video Board. The new ALTR-2480 is a 24-line by 80-character S-100-bus video display board. It features upper- and lower-case characters plus graphics. The system also has byte mapping (4K by eight), built-in read/write refresh, 2716 user-programmable EPROM, external/internal sync, normal/inverse/blink control, 500-ns access time, and direct drive for a CRT monitor. Using "Transparent Memory," the CPU can access the refresh memory at any time, the display is glitch-free, and the CPU is never interrupted. No reliance is placed on the peculiar characteristics of a particular CPU. A multiplexing technique permits nonconflicting access by both CRT controller and CPU. Price is \$295.00. Address: Matrox Electronic Systems, Ltd., 2795 Bates Rd., Montreal, Quebec, Canada H3S 1B5 (Tel: 514-481-6838/735-1182).

(continued on page 76)

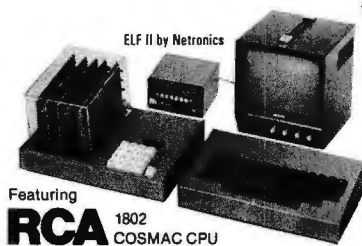

Featuring
RCA 1802 COSMAC CPU

Own a powerful home computer system, starting for just \$99.95—a price that gets you up and running the very first night...with your own TV for a video display, \$99.95 ELF II includes RCA 1802 8-bit microprocessor addressable to 64K bytes with DMA, interrupt, 16 registers, ALU, 256 byte RAM, full hex keyboard, two digit has output display, stable crystal clock for timing purposes, RCA 1801 video IC to display your programs on any video monitor or TV screen and 5-slot plug-in expansion bus (less connectors) to expand ELF II into a giant!

ELF II Explodes Into A Giant!

Master ELF II's \$99.95 capabilities, then expand with GIANT BOARD... KLUGE BOARD... 4K RAM BOARDS... TINY BASIC... ASCII KEYBOARD... LIGHT PEN... ELF-BUG MONITOR... COLOR GRAPHICS & MUSIC SYSTEM... TEXT EDITOR... ASSEMBLER... DISASSEMBLER... VIDEO DISPLAY BOARD... and—

More Breakthroughs Coming Soon!

Soon to be introduced: ELF II special application kits that give you the hardware and software you need to use ELF II for specialized purposes such as a telephone dialer... industrial controller... home photography... security system... police alert... motor controller... station output monitor on a conveyor belt assembly line... and some new, super-fantastic games!

Also coming soon: PROM Programmer... A/D, D/A Converter... Controller Board... and more! Unlike some heavily advertised hobby computers, ELF II doesn't limit you to pre-recorded programs. With ELF II you learn computing from the ground up... from machine language to assembly language to BASIC... in quick, clear and easy steps. ELF II is a powerful computing tool, but one that you can master with the same ease you once mastered a slide rule or pocket calculator.

Master This Computer In A Flash!

Regardless of how minimal your computer background is now, you can learn to program an ELF II in almost no time at all. Our *Short Course On Microprocessor & Computer Programming*—written in non-technical language—guides you through each of the RCA COSMAC 1802's capabilities, so you'll understand everything ELF II can do... and how to get ELF II to do it! Don't worry if you've been stumped by computer books before. The *Short Course* represents a major advance in literary clarity in the computer field. You don't have to be a computer engineer in order to understand it. Keyed to ELF II, it's loaded with "hands on" illustrations. When you're finished with the *Short Course*, neither ELF II nor the RCA 1802 will hold any mysteries for you.

In fact, not only will you now be able to use a personal computer creatively, you'll also be able to read magazines such as *BYTE*, *INTERFACE AGE*, *POPULAR ELECTRONICS* and *PERSONAL COMPUTING* and fully understand the articles. And, you'll understand how to expand ELF II to give you the exact capabilities you need!

If you work with large computers, ELF II and the *Short Course* will help you understand what they're doing.

Get Started For Just \$99.95, Complete!

\$99.95 ELF II includes all the hardware and software you need to start writing and running programs at home, displaying video graphics on your TV screen and designing circuits using a microprocessor—the very first night—even if you've never used a computer before.

ELF II connects directly to the video input of your TV set, without any additional hardware. Or, with an \$8.95 RF modulator (see coupon below), you can connect ELF II to your TV's antenna terminals instead.

ELF II has been designed to play all the video games you want, including a fascinating new target/missile gun game that was developed specifically for ELF II. But games are only the icing on the cake. The real value of ELF II is that it gives you a chance to write machine language programs—and machine language is the fundamental language of all computers. Of course, machine language is only a starting point. You can also program ELF II with assembly language and TINY BASIC. But ELF II's machine language capability gives you a chance to develop a working knowledge of computers that you can't get from running only

Write and run programs—the very first night—even if you've never used a computer before!

You're up and running with video graphics for just \$99.95—then use low cost add-ons to create your own personal system that rivals home computers sold for 5-times ELF II's low price!

pre-recorded tape cassettes.

ELF II Gives You The Power To Make Things Happen!

Expanded, ELF II can give you more power to make things happen in the real world than heavily advertised home computers that sell for a lot more money. Thanks to an ongoing commitment to develop the RCA 1802 for home computer use, the ELF II products—being introduced by Netronics—keep you right on the outer fringe of today's small computer technology. It's a perfect computer for engineering, business, industrial, scientific and personal applications.

Plug in the **GIANT BOARD** to record and play back programs, edit and debug programs, communicate with remote devices and make things happen in the outside world. Add **Kluge** (prototyping) Board and you can use ELF II to solve special problems such as operating a complex alarm system or controlling a printing press. Add **4K RAM BOARDS** to write longer programs, store more information and solve more sophisticated problems.

ELF II add-ons already include the **ELF II Light Pen** and the amazing **ELF-BUG Monitor**—two extremely recent breakthroughs that have not yet been duplicated by any other manufacturer.

The **ELF-BUG Monitor** lets you debug programs with lightning speed because the key to debugging is to know what's inside the registers of the microprocessor. And, with the **ELF-BUG Monitor**, instead of single stepping through your programs, you can now display the entire contents of the registers on your TV screen. You find out immediately what's going on and can make any necessary changes.

The incredible **ELF II Light Pen** lets you write or draw anything you want on a TV screen with just a wave of the "magic wand." Netronics has also introduced the **ELF II Color Graphics & Music System**—more breakthroughs that ELF II owners were the first to enjoy!

ELF II Tiny BASIC

Ultimately, ELF II understands only machine language—the fundamental coding required by all computers. But, to simplify your relationship with ELF II, we've introduced an **ELF II Tiny BASIC** that makes communicating with ELF II a breeze.

Tiny BASIC saves you the time of having to code your individual instructions in machine language for ELF II. Instead, you simply type instructions on a keyboard—PRINT, RUN, LOAD, ETC. Your Tiny BASIC program automatically translates them into machine language for ELF II. Then it translates ELF II's output back into simple words and symbols for you.

Now Available! Text Editor, Assembler, Disassembler And A New Video Display Board!

The **Text Editor** gives you word processing ability and the ability to edit programs or text while it is displayed on your video monitor. Lines and characters may be quickly inserted, deleted or changed. Add a printer and ELF II can type letters for you—error free—plus print names and addresses from your mailing list!

ELF II's **Assembler** translates assembly language programs into hexadecimal machine code for ELF II use. The **Assembler** features mnemonic abbreviations rather than numerics so that the instructions on your programs are easier to read—this is a big help in catching errors.

ELF II's **Disassembler** takes machine code programs and produces assembly language source listings. This helps you understand the programs you are working with... and improve them when required.

The new **ELF II Video Display Board** lets you generate a sharp, professional 32 or 64 character by 16 line upper and lower case display on your TV screen or video monitor—dramatically improving your unexpanded \$99.95 ELF II. When you get into longer programs, the **Video Display Board** is a real blessing!


Ask Not What Your Computer Can Do... But WHAT CAN IT DO FOR YOU?

Don't be trapped into buying an expensive dinosaur, simply because you can afford it. ELF II is more advanced and more fun to use than big name computers that cost a lot more money. With ELF II you learn to write and run your own programs. You're not just a keypunch operator. No matter what your interests are, ELF II is the fastest way to get into computers.

Order from the coupon below!

Netronics R&D Ltd., Dept PE-8 333 Litchfield Road, New Milford, CT 06776 Yes! I want my own computer! Please rush me—		PHONE ORDERS ACCEPTED! Call (203) 354-9375	
<input type="checkbox"/> RCA COSMAC ELF II kit at \$99.95 plus \$3 postage and handling (requires 6.3 to 8 volt AC power supply)		<input type="checkbox"/> Deluxe Metal Cabinet with plexiglas dust cover for ELF II. \$29.95 plus \$2.50 p&h.	
<input type="checkbox"/> Power Supply (required). \$4.95 postpaid		<input type="checkbox"/> I am also enclosing payment (including postage & handling) for the items checked below!	
<input type="checkbox"/> RCA 1802 User's Manual. \$5 postpaid		<input type="checkbox"/> I want my ELF II wired and tested with power supply. RCA 1802 User's Manual and Short Course—all for just \$149.95 plus \$3 p&h.	
<input type="checkbox"/> Tom Pittman's Short Course On Microprocessor & Computer Programming teaches you just about everything there is to know about ELF II or any RCA 1802 computer. Written in non-technical language, it's a learning breakthrough for engineers and laymen alike. \$5 postpaid.		<input type="checkbox"/> ELF-BUG™ Deluxe System Monitor on cassette tape. Allows displaying the contents of all registers on your TV at any point in your program. Also displays 24 bytes of memory with full addresses, blinking cursor and auto scrolling. A must for the serious programmer! \$14.95 postpaid.	
ALSO AVAILABLE FOR ELF II		<input type="checkbox"/> Text Editor on cassette tape gives you the ability to insert, delete or edit lines and words from your programs while they are displayed on your video monitor. (Add printer and you can use ELF II to type error-free letters plus insert names and addresses from your mailing list.) \$19.95 postpaid.	
<input type="checkbox"/> GIANT BOARD™ kit with cassette I/O, RS 232-C/TTY I/O, 8-bit P/O decoders for 14 separate I/O instructions and a system monitor/editor. \$39.95 plus \$2 p&h.		<input type="checkbox"/> Assembler on cassette tape translates assembly language programs into hexadecimal machine code for ELF II use. Mnemonic abbreviations for instructions (rather than numerics) make programs easier to read and help prevent errors. \$19.95 postpaid.	
<input type="checkbox"/> Kluge (Prototyping) Board accepts up to 36 IC's. \$17.00 plus \$1 p&h.		<input type="checkbox"/> Disassembler on cassette tape takes machine code programs and produces assembly language source listings to help you understand and improve your programs. \$19.95 on cassette tape.	
<input type="checkbox"/> 4K Static RAM kit. Addressable to any 4K page to 64K. \$89.95 plus \$3 p&h.		<input type="checkbox"/> ELF II Light Pen , assembled & tested. \$7.95 plus \$1 p&h.	
<input type="checkbox"/> Gold plated 86-pin connectors (one required for each plug-in board) \$5.70 ea. postpaid.		<input type="checkbox"/> ELF II Color Graphics & Music System Board kit. \$49.95 plus \$2 p&h.	
<input type="checkbox"/> Expansion Power Supply (required when adding 4K RAM). \$34.95 plus \$2 p&h.		<input type="checkbox"/> ELF II connects directly to the video input of your TV set without additional hardware. To connect ELF II to your antenna terminals instead, order RF Modulator . \$8.95 postpaid.	
<input type="checkbox"/> Professional ASCII Keyboard kit with 128 ASCII upper/lower case set, 96 printable characters, onboard regulator, parity, logic selection and choice of 4 hand-shaking signals to mate with almost any computer. \$64.95 plus \$2 p&h.		Coming Soon: A/D, D/A Converter, Controller Board and more!	
<input type="checkbox"/> Deluxe metal cabinet for ASCII Keyboard. \$19.95 plus \$2 p&h.		Print Name _____ Address _____ City _____ State _____ Zip _____	
<input type="checkbox"/> Video Display Board kit lets you generate a sharp, professional 32 or 64 character by 16 line upper and lower case display on your TV screen or video monitor—dramatically improving your unexpanded \$99.95 ELF II (fits inside ASCII Keyboard cabinet). \$89.95 plus \$2 p&h.		<input type="checkbox"/> DEALER INQUIRIES INVITED	

Use Quick-Wedge to fasten leads, wire in panelights, connect test equipment, install components

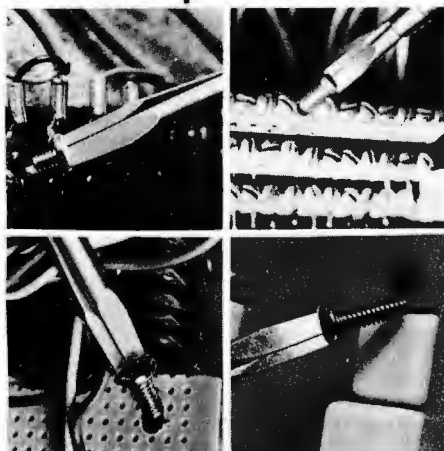

They do all that ordinary screwdrivers do, PLUS they hold and start the screw



QUICK-WEDGE 17 sizes

Screw-holding screwdrivers

Unconditionally guaranteed.

BUY A SET TODAY

See your dealer or write to:
Kedman Company, P.O. Box 25667,
Salt Lake City, Utah 84125

CIRCLE NO. 34 ON FREE INFORMATION CARD

Best price and delivery on...

Exidy Sorcerer®

— call us —



SAVE

15% on
NORTH STAR
CROMEMCO and
other S-100 Systems

10% OFF
RADIO SHACK TRS-80
and accessories (full warranty)

Complete line of printers and
disk systems for TRS-80

— WRITE FOR FREE CATALOG

MiniMicroMart, Inc.

1618 James Street, Syracuse NY 13203

PHONE: (315) 422-6666 TWX 710 541-0431

CIRCLE NO. 38 ON FREE INFORMATION CARD

COMPUTER BITS

(continued from page 75)

S-100 Extender Board. A 7-segment display logic probe and a pulse-catcher LED, whose brightness corresponds to the duty cycle of the pulse stream, are used in the new TB-2 Extender Board kit from Mullen. The board features a general-purpose "kluge" area for circuit development. This section is provided with its own on-board 5-volt, 1-ampere regulator that also powers the logic probe. Other features include power supply links for current measurement, labelled S-100-bus edge connector, and gold-plated connector contacts. Price is \$35.00. Address: Mullen Computer Products, P.O. Box 6214, Hayward, CA 94545 (Tel: 415-783-2866).

S-100 to IEEE Interface. The P&T 488 Interface Board permits the broad spectrum of S-100-bus computers to directly interface with instruments and peripherals that operate on the IEEE 488-1975 Standard Digital Interface for Programmable Instrumentation. The board comes with 488 cable assembly. Software is distributed as source code in machine-readable form. An integral "Bit-wiggler" tape interface is used for reading software with a conventional cassette tape recorder. Price is \$250.00 in kit, \$325.00 in wired form. Address: Pickles & Trout, P.O. Box 1206, Goleta, CA 93017 (Tel: 805-967-9563).

New Printers In Town. The Model DP-8000 hard-copy printer from Anadex prints 80-character lines at 112 character/second (84 lines/minute). Printing is bidirectional, via sprocket feed. Alphameric characters are formed from a 9 x 7 dot matrix. The complete 96-character ASCII set is available. Basic ASCII inputs include RS-232C, 20/60-mA current loop, and parallel-bit/serial character, the last synchronous at high strobe rates. Three data lines of FIFO buffer storage are available, and data can be accepted continuously or in bursts. Serial ASCII is adjustable to 9600 baud. Up to 1000 characters/second can be fed into the input. Address: Anadex, Inc., 9825 DeSoto Ave., Chatsworth, CA 91311 (Tel: 213-998-8010).

Bowmar's Model TP-3150 thermal printer requires no ribbons or ink. It has an 18-character capacity and uses a 5 x 5 solid-state dot-matrix print head. Print direction and character rotation are user

TAPE DISCOUNTS

Minimum order 10 tapes



CASSETTES

SAC-80	2.22	ADC-120	3.79
SAC-90	3.04	DC-45	1.19
ADC-45	1.82	DC-80	1.35
ADC-80	1.79	DC-90	1.75
ADC-90	2.89	DC-120	2.49
		DC-180	3.09

8 TRACK

D-45	1.80	AD-45	2.29
D-90	2.22	AD-90	2.99

VIDEO CASSETTES

VT-120, 4 hr.	19.25	VT-80, 2 hr.	14.50
---------------	-------	--------------	-------



MASTER I

C-60	2.59	C-90	2.99
------	------	------	------

MASTER III/III

C-60	2.99	C-90	3.39
------	------	------	------

HIGHLANDER

C-45	.97	C-90	1.69
------	-----	------	------

C-60	1.10	C-120	2.79
------	------	-------	------

DYNARANGE

SC-45	1.89	SC-80	1.89
-------	------	-------	------

		SC-90	2.59
--	--	-------	------

VIDEO CASSETTE

BETA L-500	13.25	L-250	9.95
------------	-------	-------	------

VHS VK-120, 4 hr.	18.60	VK-60, 2 hr.	14.25
-------------------	-------	--------------	-------

Lifetime Product Guarantee FREE CATALOG
Order shipped 1-3 days. Add \$2.50 shpg. & hdg. per
10 tapes. N.Y.S. Res. add sales tax. No C.O.D.S.

CONSUMERS CO

P.O. Box 550 Dept. POB
Mt Vernon, NY 10551 Phone: (914) 684-2909

CIRCLE NO. 12 ON FREE INFORMATION CARD



Thousands of Communications Electronics customers

OWN A BEARCAT® SCANNER.

But since we've introduced the Bearcat® 250 crystalless 15,600 frequency, 50 channel synthesized scanner, our specifications have been improved:

Sensitivity

0.4 microvolts for 12dB SINAD on VHF bands, UHF band slightly less

Selectivity

Better than -60dB @ ±25 KHz

Audio Output

At least 2.0 Watts rms

Audio Quality

The BC-250 audio is more noise-free and suffers less distortion than comparable models by a margin of 10dB or more.

Image Rejection

The BC-250 rejects image frequencies by at least 8dB better in all bands than comparable models.

This month, we've got a special price on the Bearcat® 250. Now, you can own this fantastic professional monitor for only \$269.00. That's a savings of over \$80.00.

To start Bearcatting, Master Charge and Visa card holders may call and order toll free 800-521-4414. Outside the U.S. and Michigan dial 313-994-4441. To order by mail, send \$269.00 plus \$5.00 for U.S. U.P.S. shipping. Foreign orders invited at slightly higher cost. Mail your orders or requests for a free catalog completely describing all Bearcat® scanners to: **Communications Electronics**, Box 1002, Dept. HFL, Ann Arbor, Michigan 48106 U.S.A. Bearcat® is a registered trademark of Masco Corporation of Indiana. Copyright ©1978 Communications Electronics

CIRCLE NO. 1 ON FREE INFORMATION CARD

SAVE more than 40% on
Popular Electronics

- ☐ Send me one year (12 issues) of *Popular Electronics* for just \$8.97. That's more than 40% off the newsstand rate of \$15.00.
- ☐ I prefer two years for \$16.97.
- ☐ Make that three years for \$22.97.

Mr.

Ms. _____
(please print full name) 45549

Address _____ Apt. _____

City _____

State _____ Zip _____

CHECK ONE: ☐ Payment enclosed. ☐ Bill me later.

Foreign postage: Add \$3 a year for Canada. Add \$5 a year (cash payment in U.S. currency only) for other countries outside U.S. and possessions. Please allow 30 to 60 days for delivery of first issue.

49007 ☐ Send me one year of *Stereo Review* for \$4.99.

NEW SUBSCRIBERS ONLY

**Equipment
information:**

YES OR NO?

Prominent manufacturers of electronic equipment and other businesses often ask permission to mail facts about their services to *Popular Electronics* subscribers. Because we're eager to maintain our fine reputation, we take great pains to insure that only offerings of the highest quality are sent to our subscribers.

To receive this useful information, please check YES below. But if you'd rather not receive such mailings, check NO and we'll remove your name from future mailing lists.

☐ **YES**, include me.

☐ **NO**, I'm not interested.



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES


BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 906 BOULDER COLORADO

POSTAGE WILL BE PAID BY ADDRESSEE

Popular Electronics

P.O. Box 2774
Boulder, Colorado 80321

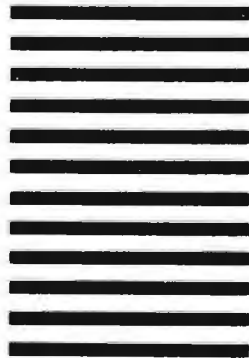

J&R

THE ONE-STOP MUSIC SHOP AT WHOLESALE PRICES

BLANK TAPES

CASSETTE TAPES

Ampeo Grand Master II C-90 \$3.11

Ampeo Grand Master I C-90 \$2.79

SAF Studio C-90 \$2.69

SAF Professional

II or III C-90 \$2.99

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

Maxell UD C-90 \$1.92

REEL-TO-REEL

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

Maxell UD 36-80 1800 ft. \$6.49

controllable. ASCII data can be synchronous parallel or asynchronous serial. The printer accepts the 64 standard ASCII characters and ignores all other codes. Price is \$270.00. Address: Bowmar Instrument Corp., Commercial Products Div., 8000 Bluffton Rd., Fort Wayne, IN 46809.

A bidirectional printer from Printer Terminals operates at 75 lines/minute and offers a choice of 7 x 9 or 9 x 9 dot-matrix print capability. It can print up to four copies simultaneously. The full 96-character, upper-and-lower-case ASCII set, plus triple-wide character font, are available. The operator can choose either 80- or 132-character lines. Included are RS-232C and parallel interfaces and 2K of memory for full-page dump. The printer is designed to accommodate roll paper, combination pin form and roll, and tractor feed. Price is \$1395.00. Address: Printer Terminals Corp., P.O. Box 535, Ramona, CA 92065 (Tel: 714-789-5200).

Single-Board Microcomputer.

The 90F/MPS microcomputer from Quay is based on the Z80 and contains multidensity-DMA floppy-disk controller. It can accommodate up to 65K of dynamic RAM, 14K of EPROM with programmer, and 1K of static RAM. Up to four 8-bit programmable I/O ports are available. There are also four programmable counter/timer channels and an RS-232C or 20-mA serial port, the latter with selectable baud rates. A resident PROM system monitor contains debug capabilities. With 16K of dynamic RAM and two parallel ports, price is \$1295.00. Address: Quay Corp., P.O. Box 386, Freehold, NJ 07728 (Tel: 201-681-8700).

S-100/Telephone Interface.

The MK-II transceiver board from MK Enterprises interfaces an S-100 bus to the telephone line and uses Touch-Tone frequencies. On incoming calls, vectored interrupts allow for ring detection and DTMF signalling. This permits calling the computer and using the telephone pushbuttons for entry. A 4-bit input post allows additional data to be transferred coincident with decoded DTMF. On outgoing calls, the board operates at telephone company speeds. A 4-bit output port allows supervision of trunk interface equipment (DAA). Single tones can be generated. Price is \$425.00. Address: MK Enterprises, 8911 Norwidge Rd., Richmond, VA (Tel: 804-740-8380).

BEST IN NEW ELECTRONICS BOOKS!

- Design, Bld & Prgm Yr Own Wkg Computer Sys. 308 p. \$7.95
- Master Hdbk of 1001 MORE Practical Elec. Ckts 700 p. \$12.95
- Handbook of Electrical Noise: Msmnt & Technology 280 p. \$6.95
- Microprocessor Cookbook 266 p., 124 il. \$5.95
- How To Build Your Own Working Robot Pet 238 p., 86 il. \$6.95
- Practical Electrical-Installation, Repr & Rewiring 406 p. \$7.95
- Radio Control Handbook—4th Edition 420 p., 315 il. \$9.95
- The Giant Book of Amateur Radio Antennas 462 p., 255 il. \$8.95
- How to Build Your Own Working 16-Bit Microcomputer 96 p. \$3.95
- Electronic Designer's Handbook—3rd Edition 350 p., 278 il. \$9.95
- Electrical Hdbk for RVs, Campers, Vans, Boats & Trailers \$3.95
- Making and Using Electricity From the Sun 144 p., 85 il. \$5.95
- Lasers, the Light Fantastic 294 p., 158 il. \$6.95
- The Power Supply Handbook 240 p., 292 il. \$7.95
- The Complete Handbook of Robotics 364 p., 137 il. \$7.95
- Artificial Intelligence 252 p., 118 il. \$7.95
- Hdbk of Remote Control & Automation Tech. 294 p., 250 il. \$7.95
- Install Your Own Home or Mobile Electric Power Plant 252 p. \$5.95
- Design & Build Your Own Custom TV Games 546 p., 244 il. \$9.95
- Computerist's Handy Manual 64 p., 39 il. \$2.25
- Digital Interfacing With an Analog World 406 p., 277 il. \$8.95
- How to Select & Install Your Own Speakers 238 p., 131 il. \$5.95
- All About Telephones 192 p., 140 il. \$4.95
- Understanding Electronics 182 p., 265 il. \$4.95
- 24 Tested, Ready-To-Run Game Programs in BASIC 266 p. \$5.95
- Amateur Radio License Study Gde For Novice, Tech, & Gen Class \$6.95
- Direct Current Motors—Characteristics & App 252 p., 170 il. \$14.95
- Design, Build, & Test Complete Speaker Sys 336 p., 189 il. \$7.95
- Color TV Trouble Factbook—Prob & Sol-4th Ed. 434 p., 617 il. \$7.95
- Radio Control Manual—Sys, Circ, Constr-3rd Ed 256 p., 197 il. \$5.95
- First Class Commercial FCC License Study Guide 392 p. \$7.95
- How to Build & Use Low-Cost Hydrophones 140 p., 37 il. \$4.95
- Programs in BASIC for Electronic Eng, Tech, & Experim \$4.95
- Illus Dictionary of Microcomputer Terminology 322 p., 150 il. \$7.95
- Computerist's Handy Databook Dictionary 96 p., 42 il. \$3.95
- 303 Dynamic Electronic Circuits 308 p., 303 il. \$6.95
- Install E'ing Electronic in Cars, Boats, Planes, Trucks & RV's \$7.95
- The BASIC Cookbook 140 p., 49 il. \$4.95
- Antenna Construction Hdbk for Ham, CB & SWL 238 p., 132 il. \$5.95
- Radar Detector Handy Manual 80 p., 63 il. \$2.25
- How to Repair Video Games 270 p., 182 il. \$7.95
- How to Cast Small Metal and Rubber Parts 144 p., 132 il. \$5.95
- TV Field & Bench Servicer's Handbook 208 p., 165 il. \$6.95
- Cut Your Elect Bill & Install Your Own Emerg Power System \$2.95
- Instrument & Control Sys Engineering Hdbk 434 p., 184 il. \$19.95
- Beginner's Guide to Designing/Building Transistor Radios \$4.95
- Automotive Air Conditioning Hdbk—Install, Maint/Repair \$6.95
- The Master Handbook of Electrical Wiring 406 p., 289 il. \$6.95
- Understand Sound, Video, & Film Recording 140 p., 74 il. \$5.95
- Towers' International FET Selector 140 p., 97 il. \$4.95
- Beginner's Gde to Computers/Microprocessors—with proj \$6.95
- Design & Build Electronic Instrumentation 420 p., 210 il. \$9.95
- How to Repair Movie & Slide Projectors 304 p., 270 il. \$7.95
- Towers' International Transistor Selector—2nd Ed. 200 p. \$6.95
- Closed-Circuit TV Installation, Maint., & Repair 294 p., 220

A "MATCHBOX" LED OSCILLOSCOPE

REGULAR readers of the Experiment-er's Corner are by now familiar with the design of simple solid-state oscilloscopes that employ an array of LEDs for a screen. Thanks to the new LM3914 dot/bar display driver, the design of such a scope can be simplified considerably. The result is a scope small enough to fit inside a pocket matchbox!

Figure 1 is the schematic diagram of a compact LED scope that uses only three ICs and consumes only 15 mA. Operation of the circuit is fairly straightforward, especially if you're already familiar with solid-

PROJECT OF THE MONTH

BY FORREST M. MIMS

is determined by the values of R_4 and C_1 .

The 4017 counter is unique in that it includes a 1-of-10 decoder. This eliminates the need for a separate decoder IC. Furthermore, because the activated output of the 4017 goes high when all other outputs remain low, the 4017 can be connected to the anode of an LED.

The remaining two gates in the 4011 form an AND gate that provides an automatic trigger. When MODE switch S_1 is closed, the gate resets (clears) the 4017 if the input voltage has sufficient amplitude to activate the lowest-order output of the LM3914 at the same time that the lowest-order counter output is high. This feature makes it relatively easy to freeze the waveform being displayed.

The "screen" of the scope is a single 5×7 dot-matrix LED display (Monsanto MAN-2A, Texas Instruments TIL305, Litronix DL-57 or equivalent). Although 35 LEDs provide very limited resolution at best, with experience it's possible to visualize square and triangle waves being displayed on the readout.

In case you're wondering where the current limiting resistors of the LED display are, they are not necessary! The LM3914 includes a novel feature that permits the current at the selected output to be externally programmed by a single resistor R_3 connected to pin 7. This pin provides a reference voltage of 1.2 to 1.3 volts, and the current through R_3 is 1/10 the LED current. According to Ohm's law, the current flowing through a resistor is the quotient of the voltage across the resistor divided by the resistance in ohms. The current through R_3 is therefore 1 mA, which means that the LED current is 10 mA.

Figure 2 is a photograph of a miniature,

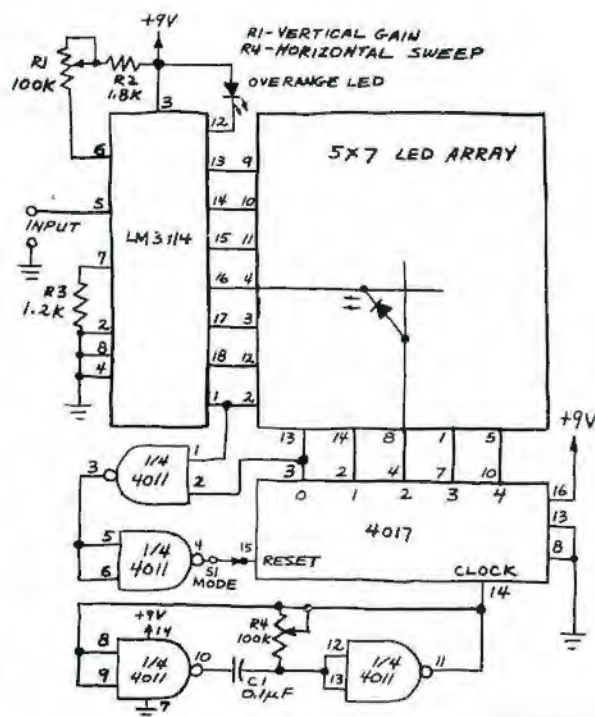


Fig. 1. Schematic diagram of matchbox LED oscilloscope.

state scope basics.

The incoming waveform is applied directly to pin 5 of the LM3914, where its instantaneous amplitude is detected by a voltage divider/comparator chain. Decoding logic then drives one of the LM3914 outputs low.

Any LED in the row connected to the selected output is then eligible to glow. The remaining requirement is a positive voltage at the LED's anode. This is obtained from a horizontal sweep circuit made from a 4011 quad NAND gate and a 4017 Johnson counter.

The 4011 performs two important functions, one of which is to provide a stream of clock pulses. This is accomplished by two gates connected as a free-running or astable oscillator. The frequency of oscillation

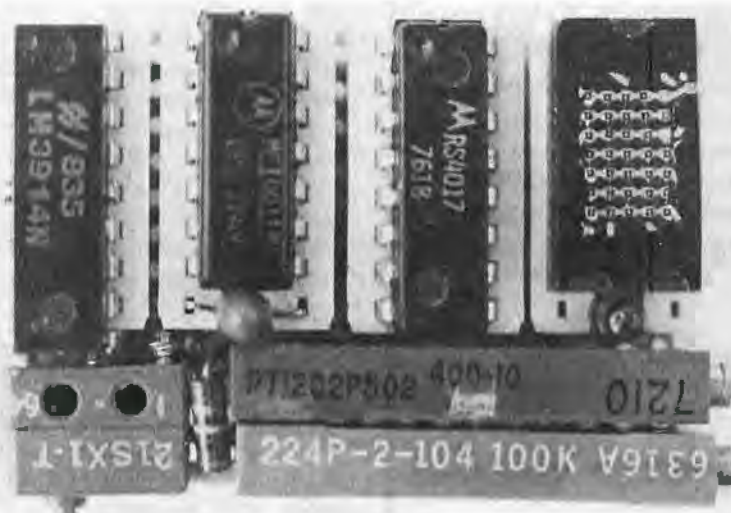


Fig. 2. Photograph of the wrapped-wire prototype LED oscilloscope assembled on a small piece of perforated board about $1.2'' \times 1.2''$.

Project of the Month *continued*

Wire-Wrapped prototype scope that I assembled on a perforated board measuring 1.2" x 1.9" (about 3 cm x 5 cm). Notice that pins 9 and 10 of the LM 3914 extend over the lower end of the socket. The small capacitor installed in the two unused pin positions of the 4011 socket is C1. The overrange LED is installed below the 5 x 7 LED array. Components R1, R4 and S1 are attached to the circuit board with cyanoacrylate adhesive. I used a miniature Micro Switch™ pushbutton switch as S1 because I had one on hand, but any other spst switch is suitable.

Some typical display patterns I have obtained are shown in Fig. 3. Often, the displayed pattern will bear little resemblance to the actual wave. Sometimes it's easier to visually integrate the approximate shape of a wave by switching off the automatic trigger and adjusting R4 until the waveform slowly parades across the display.

For some interesting visual effects, try connecting a radio or audio amplifier to the

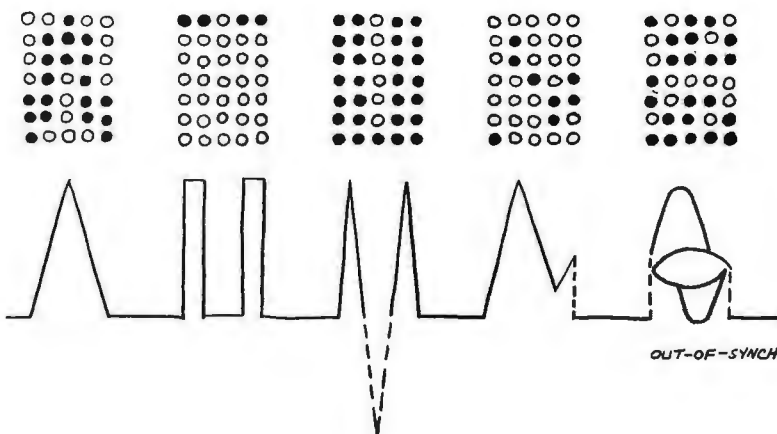


Fig. 3. Some typical display patterns obtained on a 35-element LED scope. Sometimes, the pattern bears little resemblance to the actual wave.

input of the scope. Music and voice signals will stimulate a dynamic, miniaturized light show. For best results, leave the trigger switch off.

Finally, remember that it's relatively easy to expand the scope's display. You

can add a second 5 x 7 display or make a 10 x 10 display from individual LEDs or 10-element LED bars. If you're really ambitious, you can add additional LM3914's and 4017's and make a scope having 20 x 20 or more LEDs. ◇

THERE'S A BETTER WAY TO GO.

Energy shortages tell us we have to change our driving style.



Now! It doesn't mean we have to go back to horse and buggy days. But it does mean we have to make

every drop of gas give us the most go for our money. Anyone with horse sense knows that a well-tuned car gets better mileage, and in times of fuel shortages, better mileage means a lot.

The Mark Ten B Capacitive Discharge System keeps your car in better tune so it burns less gas.

Using Mark Ten B is more than horse sense. It's the

smart move under the hood, helping a nation survive an energy crisis and keeping you on the road. Delta Mark Ten. The best way to go.

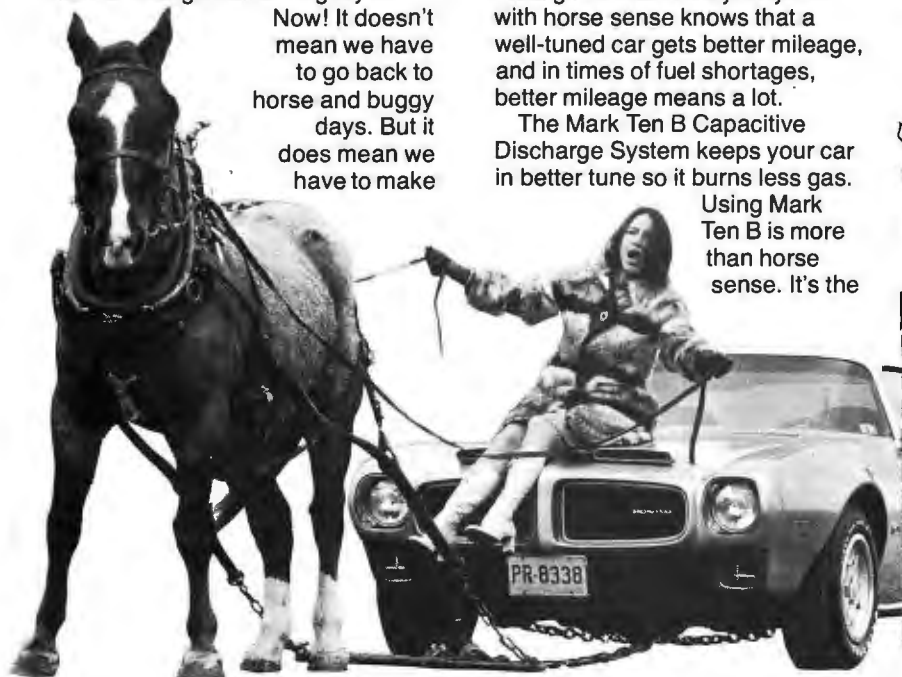

DELTA PRODUCTS, INC.


One Delta Way, Dept. PE
Grand Junction, Colo. 81501
(303) 242-9000

I want to know more about Mark Ten CDI's. Send me complete no-nonsense information on how they can improve the performance of my car.

Name

Address

City State Zip

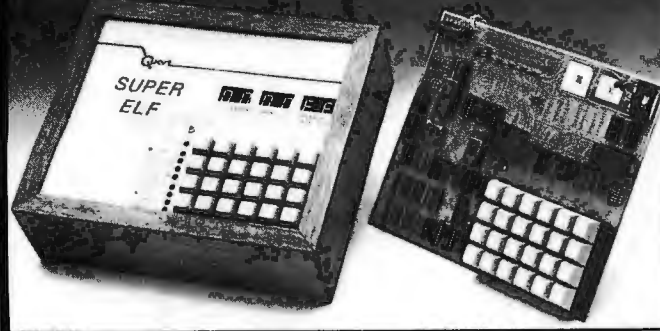

RCA Cosmac Super Elf Computer \$106.95

Compare features before you decide to buy any other computer. There is no other computer on the market today that has all the desirable benefits of the Super Elf for so little money. The Super Elf is a small single board computer that does many big things. It is an excellent computer for training and for learning programming with its machine language and yet it is easily expanded with additional memory, Tiny Basic, ASCII Keyboards, video character generation, etc.

The Super Elf includes a ROM monitor for program loading, editing and execution with SINGLE STEP for program debugging which is not included in others at the same price. With SINGLE STEP you can see the microprocessor chip operating with the unique Quest address and data bus displays before, during and after executing instructions. Also, CPU mode and instruction cycle are decoded and displayed on 8 LED indicators.

An RCA 1861 video graphics chip allows you to connect to your own TV with an inexpensive video modulator to do graphics and games. There is a speaker system included for writing your own music or using many music programs already written. The speaker amplifier may also be used to drive relays for control purposes.

A 24 key HEX keyboard includes 16 HEX keys plus load, reset, run, wait, input, memory protect, monitor select and single step. Large on

board displays provide output and optional high and low address. There is a 44 pin standard connector for PC cards and a 50 pin connector for the Quest Super Expansion Board. Power supply and sockets for all IC's are included in the price plus a detailed 127 pg. instruction manual which now includes over 40 pgs. of software info. including a series of lessons to help get you started and a music program and graphics target game.

Remember, other computers only offer Super Elf features at additional cost or not at all. Compare before you buy. Super Elf Kit \$106.95. High address option \$8.95. Low address option \$9.95. Custom Cabinet with drilled and labelled plexiglass front panel \$24.95. Expansion Cabinet with room for 4 S-100 boards \$41.00. NiCad Battery Memory Saver Kit \$6.95. All kits and options also come completely assembled and tested.

Questdata, a 12 page monthly software publication for 1802 computer users is available by subscription for \$12.00 per year.

Attention Elf Owners

New products in hardware and software coming soon.

Tiny Basic cassette \$10.00, on ROM \$38.00. original Elf kit board \$14.95

Super Expansion Board with

This is truly an astounding value! This board has been designed to allow you to decide how you want it optioned. The Super Expansion Board comes with 4K of low power RAM fully addressable anywhere in 64K with built in memory protect and a cassette interface. Provisions have been made for all other options on the same board and it fits neatly into the hardwood cabinet alongside the Super Elf. The board includes slots for up to 6K of EPROM (2708, 2758, 2716 or TI 2716) and is fully socketed. EPROM can be used for the monitor and Tiny Basic or other purposes.

A 1K Super ROM Monitor \$19.95 is available as an on board option in 2708 EPROM which has been preprogrammed with a program loader editor and error checking multi file cassette read/write software, (relocatable cassette file) another exclusive from Quest. It includes register save and readout, block move capability and video graphics driver with blinking cursor. Break points can be used with the register save feature to isolate program bugs quickly then follow with single step. The Super Monitor is written with subroutines allowing users to take advantage of monitor functions simply by calling them up

Cassette Interface \$89.95

Improvements and revisions are easily done with the monitor. If you have the Super Expansion Board and Super Monitor the monitor is up and running at the push of a button.

Other on board options include Parallel Input and Output Ports with full handshake. They allow easy connection of an ASCII keyboard to the input port. RS 232 and 20 ma Current Loop for teletype or other device are on board and if you need more memory there are two 3-100 slots for static RAM or video boards. A Godbout 8K RAM board is available for \$135.00. Also a 1K Super Monitor version 2 with video driver for full capability display with Tiny Basic and a video interface board. Parallel I/O Ports \$9.85, RS 232 \$4.50, TTY 20 ma I/F \$1.95, S-100 \$4.50. A 50 pin connector set with ribbon cable is available at \$12.50 for easy connection between the Super Elf and the Super Expansion Board.

The Power Supply Kit for the Super Expansion Board is a 5 amp supply with multiple positive and negative voltages \$29.95. Add \$4.00 for shipping. Prepunched frame \$7.50. Case \$10.00. Add \$1.50 for shipping

Auto Clock Kit \$17.95

DC clock with 4-50" displays. Uses National MA-1012 module with alarm option. Includes light dimmer, crystal timebase PC boards. Fully regulated, comp. instrs. Add \$3.95 for beautiful dark gray case. Best value anywhere

RCA Cosmac VIP Kit \$229.00

Video computer with games and graphics. Fully assem. and test \$249.00. All VIP options avail. week deliv.

Not a Cheap Clock Kit \$14.95

Includes everything except case. 2-PC boards 6-50" LED Displays 5314 clock chip, transformer, all components and full instructions. Orange displays also avail. Same kit w/80" displays. Red only. \$21.95 Case \$11.75

60 Hz Crystal Time Base Kit \$4.40

Converts digital clocks from AC line frequency to crystal time base. Outstanding accuracy. Kit includes: PC board, IC, crystal, resistors, capacitors and trimmer.

Digital Temp. Meter Kit \$39.95

Indoor and outdoor. Switches back and forth. Beautiful 50" LED readouts. Nothing like it available. Needs no additional parts for complete, full operation. Will measure -100° to +200°F, tenths of a degree, air or liquid. Beautiful woodgrain case w/bezel \$11.75

NiCad Battery Fixer/Charger Kit

Opens shorted cells that won't hold a charge and then charges them up. all in one kit w/full parts and instructions \$7.25

PROM Eraser Will erase 25 PROMs in 15 minutes Ultraviolet, assembled \$34.50

Rockwell AIM 65 Computer

6502 based single board with full ASCII keyboard and 20 column thermal printer. 20 char. alphanumeric display, ROM monitor, fully expandable \$375.00. 4K version \$450.00. 4K Assembler \$85.00. 8K Basic Interpreter \$100.00. Power supply assem. in case \$60.00. AIM 65 in thin briefcase with power supply \$485.00.

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

7400TTL	17	LM735M	5.00		
7400N	17	LM735N	1.00		
7400M	17	LM735M	1.00		
7400N	23	LM735N	1.00		
7400M	23	LM735M	1.00		
7410N	63	LM735N	1.00		
7410M	63	LM735M	1.00		
7420N	139	LM735N	1.00		
7420M	139	LM735M	1.00		
7430N	200	LM735N	1.00		
7430M	200	LM735N	1.00		
7440N	69	LM735N	1.00		
7440M	69	LM735N	1.00		
7450N	17	LM735N	1.00		
7450M	17	LM735N	1.00		
7460N	29	LM735N	1.00		
7460M	29	LM735N	1.00		
7470N	49	LM735N	1.00		
7470M	49	LM735N	1.00		
7480N	88	LM735N	1.00		
7480M	88	LM735N	1.00		
7490N	200	LM735N	1.00		
7490M	200	LM735N	1.00		
7500N	43	LM735N	1.00		
7500M	43	LM735N	1.00		
7510N	29	LM735N	1.00		
7510M	29	LM735N	1.00		
7520N	43	LM735N	1.00		
7520M	43	LM735N	1.00		
7530N	200	LM735N	1.00		
7530M	200	LM735N	1.00		
7540N	69	LM735N	1.00		
7540M	69	LM735N	1.00		
7550N	17	LM735N	1.00		
7550M	17	LM735N	1.00		
7560N	29	LM735N	1.00		
7560M	29	LM735N	1.00		
7570N	49	LM735N	1.00		
7570M	49	LM735N	1.00		
7580N	88	LM735N	1.00		
7580M	88	LM735N	1.00		
7590N	200	LM735N	1.00		
7590M	200	LM735N	1.00		
7600N	43	LM735N	1.00		
7600M	43	LM735N	1.00		
7610N	29	LM735N	1.00		
7610M	29	LM735N	1.00		
7620N	43	LM735N	1.00		
7620M	43	LM735N	1.00		
7630N	200	LM735N	1.00		
7630M	200	LM735N	1.00		
7640N	69	LM735N	1.00		
7640M	69	LM735N	1.00		
7650N	17	LM735N	1.00		
7650M	17	LM735N	1.00		
7660N	29	LM735N	1.00		
7660M	29	LM735N	1.00		
7670N	49	LM735N	1.00		
7670M	49	LM735N	1.00		
7680N	88	LM735N	1.00		
7680M	88	LM735N	1.00		
7690N	200	LM735N	1.00		
7690M	200	LM735N	1.00		
7700N	43	LM735N	1.00		
7700M	43	LM735N	1.00		
7710N	29	LM735N	1.00		
7710M	29	LM735N	1.00		
7720N	43	LM735N	1.00		
7720M	43	LM735N	1.00		
7730N	200	LM735N	1.00		
7730M	200	LM735N	1.00		
7740N	69	LM735N	1.00		
7740M	69	LM735N	1.00		
7750N	17	LM735N	1.00		
7750M	17	LM735N	1.00		
7760N	29	LM735N	1.00		
7760M	29	LM735N	1.00		
7770N	49	LM735N	1.00		
7770M	49	LM735N	1.00		
7780N	88	LM735N	1.00		
7780M	88	LM735N	1.00		
7790N	200	LM735N	1.00		
7790M	200	LM735N	1.00		
7800N	43	LM735N	1.00		
7800M	43	LM735N	1.00		
7810N	29	LM735N	1.00		
7810M	29	LM735N	1.00		
7820N	43	LM735N	1.00		
7820M	43	LM735N	1.00		
7830N	200	LM735N	1.00		
7830M	200	LM735N	1.00		
7840N	69	LM735N	1.00		
7840M	69	LM735N	1.00		
7850N	17	LM735N	1.00		
7850M	17	LM735N	1.00		
7860N	29	LM735N	1.00		
7860M	29	LM735N	1.00		
7870N	49	LM735N	1.00		
7870M	49	LM735N	1.00		
7880N	88	LM735N	1.00		
7880M	88	LM735N	1.00		
7890N	200	LM735N	1.00		
7890M	200	LM735N	1.00		
7900N	43	LM735N	1.00		
7900M	43	LM735N	1.00		
7910N	29	LM735N	1.00		
7910M	29	LM735N	1.00		
7920N	43	LM735N	1.00		
7920M	43	LM735N	1.00		
7930N	200	LM735N	1.00		
7930M	200	LM735N	1.00		
7940N	69	LM735N	1.00		
7940M	69	LM735N	1.00		
7950N	17	LM735N	1.00		
7950M	17	LM735N	1.00		
7960N	29	LM735N	1.00		
7960M	29	LM735N	1.00		
7970N	49	LM735N	1.00		
7970M	49	LM735N	1.00		
7980N	88	LM735N	1.00		
7980M	88	LM735N	1.00		
7990N	200	LM735N	1.00		
7990M	200	LM735N	1.00		

P.O. Box 4430C Santa Clara, CA 95054

For will call only: (408) 988-1640

2322 Walsh Ave.

Quiet
ELECTRONICS

CLOCK MODULES Complete alarm clocks ready to hook up with transformer and switches Very compact with 50" and 84 digits
MA1002A, C or E 50" 8.95
102P3 Transformer 2.25
MA1010A, C or E 84" 15.50
102P2 Transformer 2.25
Special transformer and size switches when purchased 2.95

MA1001 car module 3" green Rear. Display 15.95

RESISTORS % watt 5%
10 per type .03 1000 per type .012
25 per type .025 350 per type .012
100 per type .015 5 per type 6.75

KEYBOARDS
56 key ASCII keyboard kit \$87.50
Fully assembled 77.50
53 key ASCII keyboard kit 80.00
Fully assembled 70.00 Enclosure 14.95

LEDS
Red T018 15
Green, Yellow T018 20
Jumbo Red 20
Green, Orange, Yellow Jumbo 20
Chiplet LED Mounting Clips 5/1.25
(specify red, amber, green, yellow, clear)

CONTINENTAL SPECIALTIES in stock
Complete line of breadboard test equip.
MAX-100 8 digit Freq. Ctr. \$129.95
ON WIRE WRAP T018 in stock
Pulse Multimeter \$18.00
DIGITAL THERMOMETER \$49.50
Batt. oper. General purpose medical
32-230°F. Disposable probe cover
2 accuracy. Comp. Assy in
compact case. Switches from 1" to 1"

COMPUTER BOARD KITS
8K RAM Board Kit \$135.00
16K EPROM Kit 44.50
I/O Board Kit 44.50
External board w/connector
16K EPROM Board w/ 16 PROMS 74.50
North Star Floppy Disk Kit \$665.00
Pulse Multimeter 18.00
415.00

SPECIAL PRODUCTS
MAS565 Stopwatch Timer 9.00
PC board 7.50
Perf. Alarm Pushbutton 2.50
3 pos slide switch 2.50
Encoder DMD165-5 6.95

Power Supply Kit
Operates 5-18 Volt DC to 5 Volt
15-150 LED display 16.50
Voice actuated switch 50
Parallels 100A Logic \$225.00
Analog Kit \$225.00
Model 10 Trigger \$225.00
Expander Kit \$225.00
Gasket Kit \$369.00
Bastard 3V Digit \$59.95
Multimeter \$22.00
Clock Calendar Kit \$22.00

TRANSFORMERS
5V 300 mA 3.25
12 Volt 300 ma transformer 1.25
12 V 6V CT 600 ma 3.75
12V 250 ma wall plug 3.50
12V CT 250 ma wall plug 3.50
12V CT 400 ma 3.95
12V CT 400 ma 3.95
12V 6V CT 400 ma 3.95
12V 6V CT 400 ma 3.95
12V 6V CT 400 ma 3.95

KEYBOARD ENCODERS
MA5311 1.50
MA5312 1.50
MA5313 1.50
MA5314 1.50
MA5315 1.50
MA5316 1.50
MA5317 1.50
MA5318 1.50
MA5319 1.50
MA5320 1.50
MA5321 1.50
MA5322 1.50
MA5323 1.50
MA5324 1.50
MA5325 1.50
MA5326 1.50
MA5327 1.50
MA5328 1.50
MA5329 1.50
MA5330 1.50
MA5331 1.50
MA5332 1.50
MA5333 1.50
MA5334 1.50
MA5335 1.50
MA5336 1.50
MA5337 1.50
MA5338 1.50
MA5339 1.50
MA5340 1.50
MA5341 1.50
MA5342 1.50
MA5343 1.50
MA5344 1.50
MA5345 1.50
MA5346 1.50
MA5347 1.50
MA5348 1.50
MA5349 1.50
MA5350 1.50
MA5351 1.50
MA5352 1.50
MA5353 1.50
MA5354 1.50
MA5355 1.50
MA5356 1.50
MA5357 1.50
MA5358 1.50
MA5359 1.50
MA5360 1.50
MA5361 1.50
MA5362 1.50
MA5363 1.50
MA5364 1.50
MA5365 1.50
MA5366 1.50
MA5367 1.50
MA5368 1.50
MA5369 1.50
MA5370 1.50
MA5371 1.50
MA5372 1.50
MA5373 1.50
MA5374 1.50
MA5375 1.50
MA5376 1.50
MA5377 1.50
MA5378 1.50
MA5379 1.50
MA5380 1.50
MA5381 1.50
MA5382 1.50
MA5383 1.50
MA5384 1.50
MA5385 1.50
MA5386 1.50
MA5387 1.50
MA5388 1.50
MA5389 1.50
MA5390 1.50
MA5391 1.50
MA5392 1.50
MA5393 1.50
MA5394 1.50
MA5395 1.50
MA5396 1.50
MA5397 1.50
MA5398 1.50
MA5399 1.50
MA5400 1.50
MA5401 1.50
MA5402 1.50
MA5403 1.50
MA5404 1.50
MA5405 1.50
MA5406 1.50
MA5407 1.50
MA5408 1.50
MA5409 1.50
MA5410 1.50
MA5411 1.50
MA5412 1.50
MA5413 1.50
MA5414 1.50
MA5415 1.50
MA5416 1.50
MA5417 1.50
MA5418 1.50
MA5419 1.50
MA5420 1.50
MA5421 1.50
MA5422 1.50
MA5423 1.50
MA5424 1.50
MA5425 1.50
MA5426 1.50
MA5427 1.50
MA5428 1.50
MA5429 1.50
MA5430 1.50
MA5431 1.50
MA5432 1.50
MA5433 1.50
MA5434 1.50
MA5435 1.50
MA5436 1.50
MA5437 1.50
MA5438 1.50
MA5439 1.50
MA5440 1.50
MA5441 1.50
MA5442 1.50
MA5443 1.50
MA

Active Electronic Sales Corp.

MICROCOMPUTER BOARDS

SYM-1 MICROCOMPUTER BOARD

- Hardware compatibility with KIM-1
- Standard interfaces include audio cassette with remote control, both 8 bytes second (KIM) and 18 bytes second (SYM-1) cassette formats TTY and RS232 system expansion bus TV K3 expansion board interface four I/O buffers and an oscilloscope single line display
- Single +5V power requirements

SYM-1 \$329.00

NEC MICROCOMPUTER TK-80A

- The TK-80A is a complete microcomputer on a board based on the industry standard 8080A. The board has both 1K RAM and Electrically Erasable PROM expandable to 4K x 8 and 8K x 8 respectively on board. It also features 300 or 1200 baud cassette interface, the Kansas City type and three 8-Bit Programmable I/O Ports (24 lines). Keypad with 25 real keys (not a glorified calculator keypad) and 8 big bright 7-seg digits for display are also included

TK-80A \$299.00



Rockwell International AIM65

AIM 65 features on-board thermal printer and alphanumeric display and a terminal-style keyboard. It has an addressing capability up to 65K bytes, and comes with a user-dedicated 1K RAM. Two installed 4K ROMs hold a powerful Advanced Interface Monitor program, and three spare sockets are included to expand on-board ROM or PROM up to 20K bytes. An application Connector provides for attaching a TTY and one or two audio cassette recorders, and gives external access to the user-dedicated general purpose I/O lines. Also included as standard are a comprehensive AIM 65 User's Manual, a handy pocket reference card, an R6500 Hardware Manual, an R6500 Programming Manual and an AIM 65 schematic. AIM 65 is packaged on two compact modules. The circuit module is 12 inches wide and 10 inches long, the keyboard module is 12 inches wide and 4 inches long. They are connected by a detachable cable.

AIM65 \$375.00



MULTIBUS MEMORY

LARGE SCALE MULTIBUS MEMORY MEMORY ONLY

SIZE (BYTES)	MUPRO PRODUCT NUMBER	INTEL EQUIV PART NUMBER	PRICE
10K	MB-C-016/8	SBC-016	\$ 715
32K	MB-C-032/8	SBC-032	1125
48K	MB-C-048/8	SBC-048	1475
64K	MB-C-064/8	SBC-064	1795
32K	MB-C-032/16	SBC-032	1125
64K	MB-C-064/16	SBC-064	1795

Texas Instruments Low Profile Sockets

Finest Quality Socket available in the world. Nobody can match Texas Instruments quality — a unique combination of I.C. technology and multi-metal expertise.

Over one million pieces in stock.

Contacts	Price	Contacts	Price
8 PIN	.08	22 PIN	.22
14 PIN	.12	24 PIN	.24
16 PIN	.14	28 PIN	.28
18 PIN	.18	40 PIN	.40
20 PIN	.20		



MICROPROCESSOR CHIPS

CPU's

Part No.	Price
8080A	5.50
8085	12.95
6800	7.95

INTERFACE SUPPORT CIRCUITS

Part No.	Price	Part No.	Price
8212	1.98	8255	4.95
8214	3.95	8257	10.95
8216	1.98	8259	14.95
8224	2.75		
8226	1.98	6810	3.95
8228	3.98	6820	3.95
8238	3.98	6821	3.95
8251	5.50	6850	4.95
8253	14.95	6852	4.95



Zilog

Z80-CTC	\$10.90	Z80-DMA	\$32.20
Z80A-CTC	\$13.10		
		Z80-SIO/0	\$45.00
		Z80A-SIO/0	\$50.00
Z80-CPU	\$13.60	Z80-SIO/1	\$45.00
Z80A-CPU	\$16.20	Z80A-SIO/1	\$50.00
Z80-PIO	\$10.90	Z80-SIO/2	\$45.00
Z80A-PIO	\$13.10	Z80A-SIO/2	\$50.00

Features.....

BRAND NEW! 1979 IC MASTER 2500 pages

Complete integrated circuit data selector. Master guide to the latest I.C.'s including microprocessors and consumer circuits.

Free Quarterly Updates **\$39.95**



LINEAR I.C.'S

LM324N	.49	Quad Op Amp	
LM339N	.49	Quad Comparator	
LM555N-8	.29	Timer	
LM556N-14	.59	Dual Timer	
LM723CN	.36	Voltage Regulator	
LM723CH	.39	Voltage Regulator	
LM741CH	.37	Op Amp	
LM741CN-8	.24	Op Amp	
LM1458N-8	.49	Dual Op Amp	
RC4558N-8	.45	Dual Op Amp	

EPROM'S

Special of the Month

1702A-6	\$6.95	\$4.45
256 x 8 1.5 uS		
2708		\$9.95
1K x 8 450 NS		

MOS Static RAM's

Part No.	Price
2101	\$2.45 \$2.39
1K 22 PIN	
2102LFPC	\$1.19 \$1.14
1K 350NS (Low Power)	
2102-1PC	\$98 0.94
1K 450NS	
2114	\$6.99 \$6.75
4K (1K x 4) 300NS	
2114	\$6.50
4K (1K x 4) 450NS	

MOS Dynamic RAM's

Part No.	Price
4K 4027	\$2.95
4K (4K x 1) 300NS 16 PIN	
16K 416-3	\$9.95
16K (16Kx1) 200NS 16PIN	
16K 416-5	\$7.95
16K (16Kx1) 300NS 16PIN	

UART's

Part No.	Price
AY5-1013A	\$4.80 \$4.25
AY3-1015	\$5.80 \$5.25

1K CMOS RAM

Part No.	Price
5101	\$4.95 \$4.50
450NS (Low Power)	

L.E.D. LAMPS

LED209	T-1 3mm Red	.09
LED211	T-1 3mm Green	.14
LED212	T-1 3mm Yellow	.13
LED220	T-1-3/4 5mm Red	.11
LED222	T-1-3/4 5mm Green	.15
LED224	T-1-3/4 5mm Yellow	.14



DISPLAYS

FND357	375"	Common Cathode	\$1.09
FND500	500"	Common Cathode	\$1.09
FND507	500"	Common Anode	\$1.09
FND567	500"	Common Anode	\$1.29
DL747	630"	Common Anode	\$2.49
DL704	300"	Common Cathode	\$1.29
DL707	300"	Common Anode	\$1.29

ISOLATORS

TIL112	Opto Isolator 1500V	\$0.95	\$0.49
MCT6	Dual Opto Isolator 1500V	\$1.95	\$1.29



Active Electronic Sales Corp.

P.O. BOX 1035 FRAMINGHAM, MASSACHUSETTS 01701

Over-the-counter sales,
12 Mercer Rd., Natick, Mass 01760
Behind Zayres on Rte. 9
Telephone Orders & Enquiries (617) 879-0077

IN CANADA

5651 FERRIER ST
MONTREAL, QUEBEC
H4P 2K5
Tel: (514) 735-6425


4800 DUFFERIN ST.
DOWNSVIEW, ONTARIO
M3H 5S9
Tel: (416) 661-1115

MINIMUM ORDER \$10.00 • ADD \$2.00 TO COVER POSTAGE & HANDLING

Foreign customers please remit payment on an international bank draft or international postal money order in American dollars.

BAXTER CENTRE
1050 BAXTER ROAD
OTTAWA, ONTARIO
K2C 3P2
Tel: (613) 620-9471

VANCOUVER
3070 KINGSWAY
VANCOUVER, B.C.
V6R 5J7
Tel: (604) 438-3322



DIODES/ZENERS				
QTY.				
1N914	100v	10mA		.05
1N4005	600v	1A		.08
1N4007	1000v	1A		.15
1N4148	75v	10mA		.05
1N4733	5.1v	1 W Zener		.25
1N4749	24v	1W		.25
1N753A	6.2v	500 mW Zener		.25
1N758A	10v	"		.25
1N759A	12v	"		.25
1N5243	13v	"		.25
1N5244B	14v	"		.25
1N5245B	15v	"		.25
1N5349	12v	3W		.25

SOCKETS/BRIDGES				
QTY.				
8-pin	pcb	.16	ww	.35
14-pin	pcb	.20	ww	.40
16-pin	pcb	.25	ww	.45
18-pin	pcb	.30	ww	.95
20-pin	pcb	.35	ww	1.05
22-pin	pcb	.40	ww	1.15
24-pin	pcb	.45	ww	1.25
28-pin	pcb	.50	ww	1.35
40-pin	pcb	.55	ww	1.45
Molex pins .01	To-3 Sockets			.35
2 Amp Bridge	100-prv			.95
25 Amp Bridge	200-prv			1.50

TRANSISTORS, LEDS, etc.				
QTY.				
2N2222M	(2N2222 Plastic .10)			.15
2N2222A				.19
2N2907A	PNP			.19
2N3906	PNP (Plastic)			.19
2N3904	NPN (Plastic)			.19
2N3054	NPN			.55
2N3055	NPN 15A 60v			.60
T1P125	PNP Darlington			1.95
LED Green,	Red, Clear, Yellow			.19
D.L.747	7 seg 5/8" High com-anode			1.95
MAN72	7 seg com-anode (Red)			1.25
MAN3610	7 seg com-anode (Orange)			1.25
MAN82A	7 seg com-anode (Yellow)			1.25
MAN74	7 seg com-cathode (Red)			1.50
FND359	7 seg com-cathode (Red)			1.25

9000 SERIES				
QTY.		QTY.		
9301	.85	9322		.65
9309	.50	9601		.30
		9602		.45

C MOS					
QTY.		QTY.		QTY.	
4000	.15	4017	.75	4034	2.45
4001	.20	4018	.75	4035	.75
4002	.25	4019	.35	4037	1.80
4004	3.95	4020	.85	4040	.75
4006	.95	4021	.75	4041	.69
4007	.25	4022	.75	4042	.65
4008	.75	4023	.25	4043	.50
4009	.35	4024	.75	4044	.65
4010	.35	4025	.25	4046	1.25
4011	.30	4026	1.95	4047	2.50
4012	.25	4027	.35	4048	1.25
4013	.40	4028	.75	4049	.65
4014	.75	4029	1.15	4050	.45
4015	.75	4030	.30	4052	.75
4016	.35	4033	1.50	4053	.95
				4066	.75
				4069/74C04	.45
				4071	.25
				4081	.30
				4082	.30
				4507	.95
				4511	.95
				4512	1.50
				4515	2.95
				4519	.85
				4522	1.10
				4526	.95
				4528	1.10
				4529	.95
				MC14409	14.50
				MC14419	4.85
				74C151	2.50

INTEGRATED CIRCUITS UNLIMITED

7889 Clairemont Mesa Blvd., San Diego, California 92111
 Out of State 1-800-854-2211 Cable Address: ICUSD Telex: 697-827
 (714) 278-4394 California Residents 1-800-542-6239

NAME _____

STREET ADDRESS _____

CITY _____ STATE _____ ZIP _____

PHONE _____ CHARGE CARD # AE Visa BA MC _____ EXP. DATE _____

C.O.D. _____ WILL CALL _____ UPS _____ POST _____ NET 10th OF THE MONTH _____ PO # _____

ALL ORDERS SHIPPED PREPAID - NO MINIMUM - COD ORDERS ACCEPTED - ALL ORDERS SHIPPED SAME DAY
 OPEN ACCOUNTS INVITED - California Residents add 6% Sales Tax. PRICES SUBJECT TO CHANGE WITHOUT NOTICE.

24 Hour Phone Service - We accept American Express / Visa / BankAmericard / Master Charge

CIRCLE NO. 29 ON FREE INFORMATION CARD

MICRO's, RAMS, CPU's, E-PROMS				
QTY.				
8T13				2.50
8T23				2.50
8T24				3.00
8T97				1.75
74S188				3.00
1488				1.25
1489				1.25
1702A				4.50
AM 9050				4.00
ICM 7207				6.95
ICM 7208				13.95
MPS 6520				10.00
MM 5314				4.00
MM 5316				4.50
MM 5387				3.50
MM 5369				2.95
TR 1602B				3.95
UPD 414				4.95
Z 80 A				22.50
Z 80				17.50
Z 80 P10				10.50
2102				1.45
2102L				1.75
2107B-4				4.95
2114				9.50
2513				6.25
2708				11.50
2716 D.S.				34.00
2716 (5v)				69.00
2758 (5v)				26.95
3242				10.50
4116				11.50
6800				13.95
6850				7.95
8080				7.50
8085				22.50
8212				2.75
8214				4.95
8216				3.50
8224				4.25
8228				6.00
8251				7.50
8253				18.50
8255				8.50
TMS 4044				9.95

- T T L -					4-1-79
QTY.		QTY.		QTY.	
7400	.20	7492	.45	74H20	.25
7401	.20	7493	.35	74H21	.25
7402	.20	7494	.75	74H22	.40
7403	.20	7495	.60	74H30	.30
7404	.20	7496	.80	74H40	.35
7405	.35	74100	1.15	74H50	.30
7406	.25	74107	.35	74H51	.30
7407	.55	74121	.35	74H52	.20
7408	.20	74122	.55	74H53	.25
7409	.25	74123	.55	74H55	.25
7410	.20	74125	.45	74H72	.35
7411	.25	74126	.45	74H74	.35
7412	.25	74132	.75	74H101	.95
7413	.45	74141	.90	74H103	.55
7414	.75	74150	.85	74H106	1.15
7416	.25	74151	.95	74L00	.30
7417	.40	74153	.95	74L02	.30
7420	.25	74154	1.15	74L03	.35
7426	.25	74156	.70	74L04	.40
7427	.25	74157	.65	74L10	.30
7430	.20	74161/9316	.75	74L20	.45
7432	.30	74163	.85	74L30	.55
7437	.20	74164	.75	74L47	1.95
7438	.30	74165	1.10	74L51	.65
7440	.20	74166	1.75	74L55	.85
7441	1.15	74175	.90	74L72	.65
7442	.55	74176	.95	74L73	.70
7443	.45	74177	1.10	74L74	.75
7444	.45	74180	.95	74L75	1.05
7445	.75	74181	2.25	74L85	2.00
7446	.70	74182	.75	74L93	.75
7447	.70	74190	1.25	74L123	1.95
7448	.50	74191	1.25	74LS00	.40
7450	.25	74192	.75	74LS01	.40
7451	.25	74193	.85	74LS02	.45
7453	.20	74194	.95	74LS03	.45
7454	.25	74195	.95	74LS04	.45
7460	.40	74196	.95	74LS05	.45
7470	.45	74197	.95	74LS08	.45
7472	.40	74198	1.45	74LS09	.45
7473	.25	74221	1.50	74LS10	.45
7474	.30	74298	1.50	74LS11	.45
7475	.35	74367	1.35	74LS20	.45
7476	.40	75491	.65	74LS21	.45
7480	.75	75492	.65	74LS22	.45
7481	.85	74H00	.20	74LS32	.50
7482	.95	74H01	.30	74LS37	.45
7483	.95	74H04	.30	74LS38	.65
7485	.75	74H05	.25	74LS40	.70
7486	.55	74H08	.35	74LS42	.95
7489	1.05	74H10	.35	74LS51	.75
7490	.55	74H11	.25	74LS74	.95
7491	.70	74H15	.45	74LS75	1.20

I ² L, LINEARS, REGULATORS, ETC.					
QTY.		QTY.		QTY.	
MCT2	.95	LM320K24	1.65	LM373	3.95
8038	3.95	LM320T5	1.65	LM377	3.95
LM201	.75	LM320T12	1.65	78L05	.75
LM301	.45	LM320T15	1.65	78L12	.75
LM308	.65	LM323K	5.95	78L15	.75
LM309H	.85	LM324	1.25	78M05	.75
LM309 (340K-5)	1.50	LM339	.75	LM380 (8-14 Pin)	1.19
LM310	.85	7805 (340T5)	1.15	LM709 (8-14 Pin)	.45
LM311 (8-14 Pin)	.75	LM340T12	.95	LM711	.45
LM318	1.50	LM340T15	.95	LM723	.40
LM320H6	.79	LM340T18	.95	LM725	2.50
LM320H15	.79	LM340T24	.95	LM739	1.50
LM320H24	.79	LM340K12	1.25	LM741 (8-14)	.45
7905 (LM320K5)	1.65	LM340K15	1.25	LM747	1.10
LM320K12	1.65	LM340K18	1.25	LM1307	1.75
LM320K15	1.65	LM340K24	1.25	LM1458	.65

LM3900	.95
LM75451	.65
NE555	.45
NE556	.85
NE565	1.15
NE566	1.25
NE567	.95
TA7205	6.95
76477	2.95
95H90	9.95

SPECIAL DISCOUNTS

Total Order	Deduct
\$35-\$99	10%
\$100-\$300	15%
\$301-\$1000	20%

Radio Shack: No. 1 Parts Place

Low Prices and New Items Everyday!

Top-quality devices, fully functional, carefully inspected. Guaranteed to meet all specifications, both electrically and mechanically. All are made by well-known American manufacturers, and all have to pass manufacturer's quality control procedures. These are not rejects, not fallouts, not seconds. In fact, there are none better on the market! Always count on Radio Shack for the finest quality electronic parts!

TTL and CMOS Logic ICs

Full-Spec Devices
Direct from
Motorola and
National Semiconductor



Type	Cat. No.	ONLY
7400	276-1801	49¢
7402	276-1811	49¢
7404	276-1802	49¢
7441	276-1804	99¢
7447	276-1805	99¢
7448	276-1816	99¢
7473	276-1803	49¢
7474	276-1818	59¢
7475	276-1806	89¢
7476	276-1813	59¢
7490	276-1808	89¢
7492	276-1819	89¢
74154	276-1834	1.39
74192	276-1831	1.19
74193	276-1820	1.19
4001	276-2401	69¢
4011	276-2411	89¢
4012	276-2412	79¢
4013	276-2413	99¢
4017	276-2417	1.69
4020	276-2420	1.69
4021	276-2421	1.69
4023	276-2423	69¢
4027	276-2427	99¢
4028	276-2428	1.29
4046	276-2446	1.69
4049	276-2449	79¢
4050	276-2450	79¢
4051	276-2451	1.49
4066	276-2466	1.39
4070	276-2470	79¢
4511	276-2447	1.69
4518	276-2490	1.49
4543	276-2491	1.99

SN-76477 Sound/Music Synthesizer IC



299

Featured in Oct.
Popular Electronics

Creates almost any type of sound — music to "gunshots!" Built-in audio amp. Includes 2 VCO's, LF osc., noise gen., filter, 2 mixers, envelope modulator, logic circuit. 28-pin DIP. With data/applications circuits. 276-1765 2.99

Mercury Tilt Switch

- Hermetically Sealed
- Perfect for Alarm Circuits



89¢

Actual Size!

Subminiature position-detecting switch for use in projects or special applications. Switch is normally closed when upright, opens when tilted more than 45°. Rated 100mA at 24VDC. 275-025 89¢




15 Ceramic Trimmers

198

Assorted low-loss RF trimmer capacitors. May include both compression and piston types rated up to 500VDC with maximum capacity values of 3 to 100 pF. 272-805 Pkg. of 15/1.98

Top-Quality IC and PCB Accessories




- A PC Board. Mounts two 14 or 16-pin ICs or sockets for bread boarding. Copper clad. 2 1/2 x 5 x 1 1/16". 276-151 2.99
- B PC Board. Mounts single 14 or 16-pin IC or socket. 276-024 Pkg. of 2/99¢
- C 16-Pin IC Test Clip. 276-1951 Sale 2.89
- D 16-Pin DIP Header. With snap-on cover. 276-1980 1.29
- E 8-Position DIP Switch. 275-1301 1.99
- F 4-Position DIP Switch. (Not shown.) 275-1304 1.49
- G Vertical 16-pin Socket. For LED displays. 276-1986 1.49
- H 16-Pin DIP Jumper Cable. 18" long. 276-1976 3.99

DPDT Dual Inline Relay

449

Fits Std. 14-Pin IC Socket



Subminiature relay is designed for use with TTL or CMOS circuitry. Contacts rated 1A at 125VAC. Coil requires 5VDC. Coil resistance, 50 ohms. 275-215 4.49

MC14553 3-Digit BCD Counter IC

For Low-Cost Digital Readout

CMOS chip replaces over 8 separate IC's in a digital display circuit. Input pulse shaping. Master reset pin. 16-pin DIP. 276-2498 3.49

RAM Memory ICs

Under 450 nS Access Time

2102 1024 x 1 Array. Low-cost static memory chip. 16-pin DIP. Buy 8 and save!
276-2501 2.49 Ea. or 8/14.95
2114L 1024 x 4 Array. NMOS static RAM. 18-pin DIP.
276-2504 New Low Price 10.99

Handheld 6-Digit Frequency Counter

Reg. 99.95 **49.95**

- Lead Zero Blanking
- 100 Hz Up to 45 MHz
- kHz and MHz Decimals

Accuracy is 3 ppm at 25°C or less than 30 Hz at 10 MHz. Overload-protected 1-meg input. Sensitivity, 30 mV up to 30 MHz. 3x4 1/2". With mini-rod antenna, leads, case, instructions. Requires 9V battery. 22-351 ... Sale 49.95
AC Adapter. U.L. listed. 65-731 4.95



Digital IC Logic Probe


24.95

Multi-Logic Family Compatibility from 5-15VDC

Detects one-shot low repetition rate, narrow pulses scopes miss. Combines level detector, pulse detector and pulse stretcher. Hi-LED indicates logic "1", Lo-LED is logic "0". Pulse LED displays pulse transitions to 300 nanoseconds, blinks at 3 Hz for high-frequency signals (up to 1.5 MHz). With cables. 22-300 24.95



Custom Printed Circuit Board Kit



Everything you need for making high-quality custom PC boards.
276-1576 7.95
Extra Resist Pen. 276-1530 1.29
Extra Etching Solution. 276-1535 2.19

Computer Data Manuals & Semiconductor Handbook


- A Intel 8080/8085 Programming Manual. Handy reference for programming with Intel's assembly language. 62-1377 3.95
- B Intel Memory Design Handbook. Explains use of Intel's memory components and support circuits in systems. 62-1378 3.95
- C Intel Data Catalog. 928 pages of specifications on most of Intel's standard microcomputer-related products. 62-1379 4.95
- D Semiconductor Reference and Application Handbook. Complete specs and applications for popular IC transistors, diodes. 276-4002 Sale 99¢

NEW LEDs

- Tri-Color
- Red Flasher



A Displays red, green, yellow. Uniform light output of 0.6 mcd. Forward voltage: 2.2VDC. Max. current: 25mA. T1-3/4 case style. 276-036 1.39
B Operates directly from 5VDC power source. Pulse rate: 3Hz. Max. current: 20 mA at 5VDC. 276-036 1.29



Digital Project Accessories

- A Bezel with Lens. High-contrast filter for LED displays. 3/16 x 1 1/2" lens opening. 270-301 3.95
- B Deluxe Molded Display Case. Red lens. Mount up to four 0.6" or eight 0.3" LED digits. With brackets. 1 1/2 x 3 1/2 x 4 1/2". 270-285 3.95
- C MA 1003 Clock Case. For car clock modules. Accepts 3 pushbutton switches (not inc.). With brackets, blue lens. 3 1/2 x 2 1/2 x 2". 270-303 5.95

Molded Connectors



Rated 6A @ 250V. Standard .093" pin diameter.

Fig.	Pins	Type	Cat. No.	Each	Fig.	Pins	Type	Cat. No.	Each
A	4	Male	274-224	99¢	B	4	Female	274-234	99¢
A	6	Male	274-226	1.19	B	6	Female	274-236	1.19
A	9	Male	274-229	1.39	B	9	Female	274-239	1.39
A	12	Male	274-232	1.49	B	12	Female	274-242	1.49

2-Pin Male & Female. (Not shown) 274-222 Pair 89¢

**WHY WAIT FOR MAIL ORDER DELIVERY?
IN STOCK NOW AT OUR STORE NEAR YOU!**

Prices may vary at individual stores and dealers

Radio Shack®

A DIVISION OF TANDY CORPORATION • FORT WORTH, TEXAS 76102
OVER 7000 LOCATIONS IN NINE COUNTRIES

Poly Paks'®

ECONOMY MINDED INFLATION FIGHTING


SALE



\$9.99
Cat. No. 92CU5653

DIAL DESK TELEPHONE

Guaranteed Satisfaction



\$9.95

GEL/SEL ENERGY PAKS

Portable Power at Poly Paks Prices! Brand New, 4V @ 2.6 Amp. Hr. Gel Cell storage battery. Units consist of gelled electrolyte, enclosed in hermetically sealed plastic, for years of dependable service. Compact, only 3-1/2" x 2-3/8" x 1-5/16" in size. Stack 'em to produce 8V, 12V, 24V... or increase the amperage up and away. Use 'em for Burglar Alarms, Intrusion Detectors, Ham, Mobile, or Solar Storage Applications. Cat. No. 92CU5788

It's Stacked Energy! 4V RECHARGEABLE



\$39.95
Cat. No. 92CU4007

STEREO AM-FM-MPX TUNER/AMPLIFIER

Slide volume, bass, treble, balance controls! 2 & 4 speaker systems!

12VDC 10 AMP POWER SUPPLY



\$49.95

• Wired • Regulated

HY GAIN LED CLOCK KIT*

• Panel or case design • 3 PC set

*Kit consists of a 3 pc set, transformer, function switches on-a-board, and a National MA1012-12A digital clock module with all parts and IC chip mounted on a 3" x 1 3/8" G-10 pc board. The RED filtered module measures 3" x 3/4" x 3/16". The PC board-module is mounted in a bakelite frame 3 7/8" x 1 3/4" x 1/8" with 2 holes for easy panel mounting. (3 1/4" on centers).



\$9.95
Cat. No. 92CU5663



\$14.88

PARALLEL ENTRY DIGITAL PRINTER

Converts 115VAC to 12VDC at 10 Amps fully regulated! Supplies up to 10 Amp surge. Dual transistor regulation with Motorola 2N3055 and 2N3773 for maximum dependability. Less than 100mv ripple, regulation better than 0.5%. Extra large heat sink for ULTRA COOL operation. Front panel on/off switch, fuse, and indicator lamp for fingertip control. 8 1/2" x 6 1/2" x 4 high. Wt. 9 lbs. Cat. No. 92CU5641



\$8.88

HANDY COMPUTER MULTITESTER

• 1000 ohms per volt
1% precision, movements diode protected against burnout. Measured DC volts 0-15-160-1000; AC volts 0-15-160-1000; DC current 0-10-100ma; resistance 0-1000. Sensitivity 1000 ohms/volt AC-DC. Uses penlite cell, not included. Size 2 3/4" x 3 1/2" x 1 1/2". Wt. 5 ozs. Cat. No. 3921



Only \$9.95

40 channel CB ONE ARM BANDIT BY hy-gain

• Single-Handed Operation Leaves "One For The Road"
• All Controls Contained In The Mike

Now, take one hand command of all 40 ch's with the One Arm Bandit, the set with the works in the mike. All the controls you need to fumble for on the dash, are planned in the Palm of Your Hand. OFF/ON, VOLUME, SQUELCH, CHANNEL SELECTOR, and DISPLAY, as well as the SPEAKER itself are all conveniently located where your fingers do the talking. Cat. No. 92CU5666

These unique printers feature precision Swiss construction. 18 key columns are divided into 16 for numerals, and 2 for alphabetical and trig figures, and mathematical functions. Each wheel is 12 position. Utilizes 2 7/8" wide adding machine tape, and dual color ribbon. Printing technique: parallel pressure printing, multiple copies. Print Rate: 3 lines per second. Operating voltage: 22 to 28 VDC. Comes in original packing w/roll of tape. Size: 6-1/2" x 3-1/8" x 5-3/8". Wt. 7 lbs. Cat. No. 92CU5645

"CRIMP-ON" PL-259 COAX LEAD 4 for \$1.29
Cat. No. 92CU5694

Quick, Easy plug crimping. No Soldering! Strip insulation, squeeze. Matches to 50-230. For RG58/U - 69/U.



40 CHANNEL CB BOARD

Only \$9.99

1N4000 Epoxy Rectifiers

Cat. No.	Type	Volts	10 for \$	10 for \$
2377	1N4001	50	10 for \$.75	
2378	1N4002	100	10 for \$.85	
2379	1N4003	200	10 for \$.95	
2380	1N4004	400	10 for \$ 1.19	
2381	1N4005	600	10 for \$ 1.39	
2382	1N4006	800	10 for \$ 1.49	
2383	1N4007	1000	10 for \$ 1.59	

Poly Paks buys up factory close-out from Hy gain micro gain! Boards have Heatstained 9 Watt Amp (Chip, RF and Mod. Transistors, and National Semi MM series P.L.L. May be used for 10 meter conversion (see 6 month series "H to 10" in T3 Mag.) The parts alone make it an offer you can't refuse. Cat. No. 92CU5680

HIGH POWER 300 CFM BLOWER

Only \$12.50

HEAVY DUTY

Imagine a 300 CFM blower worth \$33.00 at a special purchase for economy savings. Powerful 1 1/2" dynamically balanced. Motor specs 115vac 2.2 Amps. Housing: Wheel 5 1/2" diameter, 2 1/2" deep; housing diameter 7 1/4" x 3 1/2" deep; PLANGE 4 1/2" square; INLET 3 5/8" x 2 1/2". All black steel construction. 14" long, 115vac wire with hags. Use for home, shop and industry. Wt. 12 lbs. Removed from equipment. Cat. No. 92CU5683



MINI LECTROS

MFD.	VOLTS	LEADS	SALE
25	15	Axial	.14
25	25	Axial	.17
50	15	Axial	.17
50	25	Axial	.19
50	100	Axial	.21
100	15	Axial	.23
100	50	Axial	.35
220	25	P.C.	.32
300	25	P.C.	.33
500	15	P.C.	.33
500	25	P.C.	.36
1000	15	P.C.	.55
1000	25	Axial	.59

Order by Cat. No. 92CU5718 and Value

\$2.95 Ea

3 ELEMENT 120 VAC HOTPLATE

2 for \$5

This Top Quality, Multi-Purpose Hotplate features, Built-In Thermostat, Neon "Red" AC Indicator Lamp, and 1/8" Textured Glass Surface for even heat distribution. Generates up to 150° C. 120 watts! Use for photographic applications, laboratory work, aquarium heater, plants, etc. Size: 10-3/8" x 6-3/8" x 1/8". Wt. 1 lb. 2 oz. Cat. No. 92CU5723



"SKINNY-TRIMS" POTENTIOMETERS

3/8" square Single turn style Screw-driver adjust. 20% tolerance, 0.5 Watt ratings, ceramic construction. PC leads. ORDER BY CAT. NO. AND VALUE

Type-63	100	1K	5K	25K	200K
10	100	1K	5K	25K	200K
50	500	2.5K	20K	100K	1Meg

6 for **\$2.49**
Cat. No. 92CU5866

2000 DEGREE SOLAR FURNACE Only \$595

Giant Fresnel Flat Magnifying Lens

It's different! It's unusual! Magnifies like a lens, yet it's flat! A series of small concentric grooves extend from the center to the edge of the lens, acting like a giant prism! Each groove bends the light waves that hit it, acting like a conventional convex lens. Lightweight, inexpensive, and extremely short focal length of 12". Harness the sun's energy with the Fresnel lens and a simple wooden frame! Focus the sun on any flammable object and watch it burst into flames within seconds! Size 11" square, 3/32" thick. Optically perfect. Wt. 1 lb. Cat. No. 92CU5838

\$2.98
Cat. No. 92CU5375

ULTRASONIC TRANSDUCER

Perfect for dozens of projects, including remote control, alarms, etc. Sends and receives 1" diameter, 3/4" deep, with standard W-A type phono jack. Wt. 2 oz



Only \$2.50

"TIE-PIN" CONDENSER MIKE

It's a little giant in sound quality. Metal encased, and omnidirectional. Frequency response 20-20,000 Hz. Less tie pin or lapel clip. 600 ohm impedance, 1.5 VDC. Cat. No. 92CU5830




LED WATCH GUTS

\$1.49

(Ladies') Cat. No. 92CU5115C
(Men's) Cat. No. 92CU5115B

HOW TO ORDER

When ordering, always use catalog number, type no., the name of the magazine you are ordering from and the month




Order by Cat. No. LEDS:

1768	MICRO TOPHAT RED	Your Choice 20 for: \$2.49
1942	MED YELLOW STUBBY	
1962	MICRO SINGLE PIN RED	
2135	JUMBO RED	
2139	JUMBO GREEN	
2137	MICRO RED	
2790	JUMBO RED CLEAR	

"BEEM-O-LIGHT" LASER DIODES


Rated ~ 5-9 Watts. Wavelength. 904 nm **\$5.99**
Cat. No. 92CU5308



"INCHER" READOUT

\$1 each

To be exact 0.8" of an inch. COMMON CATHODE, direct replacement for Litronics 747, Left decimal, 5V @ 8 mils per segment. Red. Cat. No. 92CU3327



DIP SWITCHES

Cat. No.	Switches	Size
3608	2	.77
3609	3	.88
3612	4	.99
3670	6	1.19
3164	8	1.39
3672	10	2.50

Order by Cat. No.

POLY PAKS®

COD'S MAY BE PHONED!
P.O. BOX 942-ES
SO. LYNNFIELD, MA 01940

Terms: Add Postage
Phone: (617) 245-3828
Retail: 16-18 Del Carmine St.
MINIMUM ORDER: \$8 Wakefield, MA

Rated: Net 30

FREE INFORMATION:

Learning more about a product that's advertised or mentioned in an article in this month's issue is as simple as one, two, three. And absolutely free.

1 Print or type your name and address on the attached card. Use only one card per person.

2 Circle the number(s) on the card that correspond to the number(s) at the bottom of the advertisement or article for which you want more information. (Key numbers for advertised products also appear in the Advertisers' Index.)

3 Simply mail the card, and the literature will be mailed to you free of charge from the manufacturer.

FREE INFORMATION:

This address is for our product Free Information Service only. Editorial inquiries should be directed to POPULAR ELECTRONICS, One Park Avenue, New York, N.Y. 10016.

POPULAR ELECTRONICS

USE ONLY ONE CARD PER PERSON

PE8793

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

(Zip Code must be included to insure delivery.) (Void after Oct. 31, 1979)

Do you own a capacitance meter? a. ☐ Yes b. ☐ No

Are you interested in hearing more about capacitance meters?

a. ☐ Yes b. ☐ No

Do you plan on buying a capacitance meter during the next 12 months? a. ☐ Yes b. ☐ No

4 ☐ Please send me 12 issues of Popular Electronics for \$8.97 and bill me.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100	101	102	103	104	105
106	107	108	109	110	111	112	113	114	115	116	117	118	119	120

POPULAR ELECTRONICS

USE ONLY ONE CARD PER PERSON

PE8792

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

(Zip Code must be included to insure delivery.) (Void after Oct. 31, 1979)

Do you own a capacitance meter? a. ☐ Yes b. ☐ No

Are you interested in hearing more about capacitance meters?

a. ☐ Yes b. ☐ No

Do you plan on buying a capacitance meter during the next 12 months? a. ☐ Yes b. ☐ No

4 ☐ Please send me 12 issues of Popular Electronics for \$8.97 and bill me.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100	101	102	103	104	105
106	107	108	109	110	111	112	113	114	115	116	117	118	119	120

POPULAR ELECTRONICS

USE ONLY ONE CARD PER PERSON

PE8791

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

(Zip Code must be included to insure delivery.) (Void after Oct. 31, 1979)

Do you own a capacitance meter? a. ☐ Yes b. ☐ No

Are you interested in hearing more about capacitance meters?

a. ☐ Yes b. ☐ No

Do you plan on buying a capacitance meter during the next 12 months? a. ☐ Yes b. ☐ No

4 ☐ Please send me 12 issues of Popular Electronics for \$8.97 and bill me.

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100	101	102	103	104	105
106	107	108	109	110	111	112	113	114	115	116	117	118	119	120



No postage
necessary
if mailed
in the
United States

BUSINESS REPLY CARD

First Class Permit No. 217 Clinton, Iowa

POSTAGE WILL BE PAID BY

Popular Electronics

P.O. Box 2905
Clinton, Iowa 52732



No postage
necessary
if mailed
in the
United States

BUSINESS REPLY CARD

First Class Permit No. 217 Clinton, Iowa

POSTAGE WILL BE PAID BY

Popular Electronics

P.O. Box 2905
Clinton, Iowa 52732



No postage
necessary
if mailed
in the
United States

BUSINESS REPLY CARD

First Class Permit No. 217 Clinton, Iowa

POSTAGE WILL BE PAID BY

Popular Electronics

P.O. Box 2905
Clinton, Iowa 52732

**THE NEW
Stereo
Review
SRT14**



STEREO TEST RECORD

The editors and technical staff of Stereo Review present the most comprehensive, accurate and easy-to-use test record ever developed.

Here, at last, is a record that contains everything you need to get the fullest, most realistic reproduction from your stereo equipment. The SRT14 is produced to strict laboratory standards. Engraved in its grooves are a series of precisely recorded test tones, frequency sweeps, and random-noise signals that enable you to accurately analyze and check your stereo system for:

- Frequency response
- Stereo separation
- Cartridge tracking
- Channel balance
- Wow and flutter
- Hum and noise, including turntable rumble
- Optimum speaker placement, and more . . . much more

And you can do it all without any instruments . . . by ear alone.

Included with the SRT14 is a detailed instruction manual complete with charts, tables, and diagrams. This takes you step by step through the testing process, explains the significance of each test, tells you what to listen for, describes any aberrations in system response, and it details corrective procedures.

For professionals too. Included on the record are a series of tests that call for the use of sophisticated measuring instruments. These tests permit the advanced audiophile and professional to make precise measurements of a host of other performance characteristics.

SRT14 contents

- FREQUENCY-RESPONSE TEST, LEFT AND RIGHT CHANNELS
- STEREO SEPARATION
- PHONO-CARTRIDGE TRACKING, HIGH FREQUENCY
- PHONO-CARTRIDGE TRACKING, LOW FREQUENCY
- CHANNEL BALANCE
- PHASE TEST, SPEAKERS AND PHONO-CARTRIDGE
- NOISE TEST
- RECORD-PLAYER FLUTTER TEST
- FREQUENCY-RESPONSE SWEEP, 10,000 TO 40,000 HZ
- FREQUENCY-RESPONSE SWEEP, 500 TO 20,000 HZ
- SQUARE-WAVE TEST
- TONE-BURST TEST
- INTERMODULATION-DISTORTION TEST
- ANTISKATING TEST
- 1,000-HZ REFERENCE TONES
- FLUTTER AND SPEED TEST
- STEREO-SPREAD TEST

START GETTING THE MOST OUT OF YOUR STEREO SYSTEM. MAKE THE SRT14 YOUR NEXT RECORD PURCHASE.

HERE'S HOW TO ORDER

CASH: mail your order along with your name, address, and remittance in the amount of \$7.95 (\$9.95 outside U.S.A.). Residents of CA, CO, DC, FL, IL, MI, MO, NY STATE, and VT add applicable sales tax.

CHARGE: your American Express, Visa, Master Charge, or Diners Club Account. Mail your order with your name, address, credit card #, and expiration date (Master Charge customers include 4-digit Interbank # above your name). Be sure to include your signature.

ORDER FROM: TEST RECORD, Dept. 30013, P.O. Box 278, Pratt Station, B'klyn, N.Y. 11205.

DIGI-KEY CORPORATION

Quality Electronic Components

TOLL FREE

-800-465-4444

MINN., AK., HI. RESIDENTS

218-681-6674

DON'T FORGET OUR DISCOUNTS WHEN COMPARING PRICES

I.C.'S • RESISTORS • TRANSISTORS • CAPACITORS • DIODES • I.C. SOCKETS & PINS • SWITCHES • CLOCK MODULES • OPTOELECTRONICS • BREADBOARDING & TESTING DEVICES • DRAFTING SUPPLIES • DATA BOOKS • HEAT SINKS • WIRE • TOOLS ... AND MORE ... WRITE FOR FREE CATALOG ...

I.C. Socket Prices Slashed

I.C. SOCKETS

• BOTH SOLIDSTATE AND WIRE WRAP ARE TYPICAL
• SOLIDSTATE SOCKETS ARE LOW PROFILE
• WIRE WRAP SOCKETS ARE STANDARD PROFILE (TYPE 1)

Part No.	Description	1	10	100
8-ST	8 Pin Solid Tab	.08	.80	8.00
14-ST	14 Pin Solid Tab	.14	1.40	14.00
16-ST	16 Pin Solid Tab	.16	1.60	16.00
18-ST	18 Pin Solid Tab	.18	1.80	18.00
20-ST	20 Pin Solid Tab	.20	2.00	20.00
22-ST	22 Pin Solid Tab	.22	2.20	22.00
24-ST	24 Pin Solid Tab	.24	2.40	24.00
28-ST	28 Pin Solid Tab	.28	2.80	28.00
40-ST	40 Pin Solid Tab	.40	4.00	40.00
6-WW	6 Pin Wire Wrap	.24	2.30	20.50
14-WW	14 Pin Wire Wrap	.26	2.50	22.00
16-WW	16 Pin Wire Wrap	.28	2.65	23.50
18-WW	18 Pin Wire Wrap	.30	2.80	25.00
20-WW	20 Pin Wire Wrap	.32	2.95	26.50
22-WW	22 Pin Wire Wrap	.34	3.10	28.00
24-WW	24 Pin Wire Wrap	.36	3.25	29.50
28-WW	28 Pin Wire Wrap	.38	3.40	31.00
40-WW	40 Pin Wire Wrap	.42	3.70	34.00

MOLEX I.C. SOCKET PINS

50 PINS 100 PINS 250 PINS 500 PINS

INTEGRATED CIRCUITS

Part No.	Description	1	10	100	1,000
7400	7400	.25	2.50	25.00	250.00
7401	7401	.25	2.50	25.00	250.00
7402	7402	.25	2.50	25.00	250.00
7403	7403	.25	2.50	25.00	250.00
7404	7404	.25	2.50	25.00	250.00
7405	7405	.25	2.50	25.00	250.00
7406	7406	.25	2.50	25.00	250.00
7407	7407	.25	2.50	25.00	250.00
7408	7408	.25	2.50	25.00	250.00
7409	7409	.25	2.50	25.00	250.00
7410	7410	.25	2.50	25.00	250.00
7411	7411	.25	2.50	25.00	250.00
7412	7412	.25	2.50	25.00	250.00
7413	7413	.25	2.50	25.00	250.00
7414	7414	.25	2.50	25.00	250.00
7415	7415	.25	2.50	25.00	250.00
7416	7416	.25	2.50	25.00	250.00
7417	7417	.25	2.50	25.00	250.00
7418	7418	.25	2.50	25.00	250.00
7419	7419	.25	2.50	25.00	250.00
7420	7420	.25	2.50	25.00	250.00
7421	7421	.25	2.50	25.00	250.00
7422	7422	.25	2.50	25.00	250.00
7423	7423	.25	2.50	25.00	250.00
7424	7424	.25	2.50	25.00	250.00
7425	7425	.25	2.50	25.00	250.00
7426	7426	.25	2.50	25.00	250.00
7427	7427	.25	2.50	25.00	250.00
7428	7428	.25	2.50	25.00	250.00
7429	7429	.25	2.50	25.00	250.00
7430	7430	.25	2.50	25.00	250.00
7431	7431	.25	2.50	25.00	250.00
7432	7432	.25	2.50	25.00	250.00
7433	7433	.25	2.50	25.00	250.00
7434	7434	.25	2.50	25.00	250.00
7435	7435	.25	2.50	25.00	250.00
7436	7436	.25	2.50	25.00	250.00
7437	7437	.25	2.50	25.00	250.00
7438	7438	.25	2.50	25.00	250.00
7439	7439	.25	2.50	25.00	250.00
7440	7440	.25	2.50	25.00	250.00
7441	7441	.25	2.50	25.00	250.00
7442	7442	.25	2.50	25.00	250.00
7443	7443	.25	2.50	25.00	250.00
7444	7444	.25	2.50	25.00	250.00
7445	7445	.25	2.50	25.00	250.00
7446	7446	.25	2.50	25.00	250.00
7447	7447	.25	2.50	25.00	250.00
7448	7448	.25	2.50	25.00	250.00
7449	7449	.25	2.50	25.00	250.00
7450	7450	.25	2.50	25.00	250.00
7451	7451	.25	2.50	25.00	250.00
7452	7452	.25	2.50	25.00	250.00
7453	7453	.25	2.50	25.00	250.00
7454	7454	.25	2.50	25.00	250.00
7455	7455	.25	2.50	25.00	250.00
7456	7456	.25	2.50	25.00	250.00
7457	7457	.25	2.50	25.00	250.00
7458	7458	.25	2.50	25.00	250.00
7459	7459	.25	2.50	25.00	250.00
7460	7460	.25	2.50	25.00	250.00
7461	7461	.25	2.50	25.00	250.00
7462	7462	.25	2.50	25.00	250.00
7463	7463	.25	2.50	25.00	250.00
7464	7464	.25	2.50	25.00	250.00
7465	7465	.25	2.50	25.00	250.00
7466	7466	.25	2.50	25.00	250.00
7467	7467	.25	2.50	25.00	250.00
7468	7468	.25	2.50	25.00	250.00
7469	7469	.25	2.50	25.00	250.00
7470	7470	.25	2.50	25.00	250.00
7471	7471	.25	2.50	25.00	250.00
7472	7472	.25	2.50	25.00	250.00
7473	7473	.25	2.50	25.00	250.00
7474	7474	.25	2.50	25.00	250.00
7475	7475	.25	2.50	25.00	250.00
7476	7476	.25	2.50	25.00	250.00
7477	7477	.25	2.50	25.00	250.00
7478	7478	.25	2.50	25.00	250.00
7479	7479	.25	2.50	25.00	250.00
7480	7480	.25	2.50	25.00	250.00
7481	7481	.25	2.50	25.00	250.00
7482	7482	.25	2.50	25.00	250.00
7483	7483	.25	2.50	25.00	250.00
7484	7484	.25	2.50	25.00	250.00
7485	7485	.25	2.50	25.00	250.00
7486	7486	.25	2.50	25.00	250.00
7487	7487	.25	2.50	25.00	250.00
7488	7488	.25	2.50	25.00	250.00
7489	7489	.25	2.50	25.00	250.00
7490	7490	.25	2.50	25.00	250.00
7491	7491	.25	2.50	25.00	250.00
7492	7492	.25	2.50	25.00	250.00
7493	7493	.25	2.50	25.00	250.00
7494	7494	.25	2.50	25.00	250.00
7495	7495	.25	2.50	25.00	250.00
7496	7496	.25	2.50	25.00	250.00
7497	7497	.25	2.50	25.00	250.00
7498	7498	.25	2.50	25.00	250.00
7499	7499	.25	2.50	25.00	250.00
7500	7500	.25	2.50	25.00	250.00

TEXAS INSTRUMENTS GOLD EDGEBOARD CONNECTORS

RELIABLE, COST-EFFICIENT CONTACT DESIGN

• 50 (Wire) to 75 (Solid Tab) pin connectors gold plated
• Copper-nickel the C-73 alloy
• Differential contact polarity
• Protected, anti-solder spray design
• Containers are very reusable

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

MA SERIES .100" x .300" EDGEBOARD CONNECTORS

Panasonic DISC CAPACITOR KIT

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95


310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

310 DISC CAPACITORS ONLY \$22.95

7400 TTL			
		SN7470N	.29
		SN7472N	.29
SN7400N	.18	SN7473N	.35
SN7401N	.18	SN7474N	.35
SN7402N	.18	SN7475N	.35
SN7403N	.18	SN7476N	.35
SN7404N	.18	SN7478N	5.00
SN7405N	.20	SN7480N	.50
SN7406N	.20	SN7481N	.50
SN7407N	.20	SN7483N	.50
SN7408N	.20	SN7485N	.79
SN7409N	.20	SN7486A	.35
SN7410N	.18	SN7489N	1.75
SN7411N	.25	SN7487A	.85
SN7412N	.25	SN7481N	.59
SN7413N	.40	SN7482N	.43
SN7414N	.75	SN7483N	.43
SN7415N	.75	SN7484N	.65
SN7417N	.25	SN7495N	.65
SN7420N	.20	SN7496N	.65
SN7421N	.29	SN7497N	3.00
SN7422N	.39	SN74100N	.89
SN7423N	.25	SN74107N	.35
SN7425N	.29	SN74109N	.59
SN7426N	.29	SN74116N	1.95
SN7427N	.25	SN74121N	.35
SN7429N	.39	SN74125N	.39
SN7430N	.25	SN74123N	.49
SN7432N	.25	SN74125N	.49
SN7433N	.25	SN74126N	.40
SN7434N	.25	SN74137N	.75
SN7436N	.25	SN74139N	.75
SN7440N	.20	SN74141N	.79
SN7441N	.89	SN74142N	2.85
SN7442N	.40	SN74143N	2.95
SN7443N	.75	SN74144N	2.95
SN7444N	.75	SN74145N	.79
SN7445N	.75	SN74147N	1.95
SN7446N	.89	SN74149N	1.29
SN7447N	.59	SN74150N	.89
SN7448N	.79	SN74151N	.59
SN7450N	.20	SN74152N	.59
SN7451N	.20	SN74153N	.59
SN7453N	.20	SN74154N	.99
SN7454N	.20	SN74155N	.79
SN7458A	.25	SN74156N	.79
		SN74157N	2.25
		SN74284A	3.95
		SN74365N	.69
		SN74368A	.69
		SN74373N	.69
		SN74386N	.69
		SN74390N	1.95

EXCITING NEW KITS

JE600 HEXADECIMAL ENCODER KIT

FEATURES:

- Full 8 bit latched output for microprocessor use
- 3 User Define keys with one being bistable operation
- Debounce circuit provided for all 19 keys
- LED readout to verify entries
- Easy interfacing with standard 16 pin IC connector
- Only +5VDC required for operations

FULL 8 BIT LATCHED OUTPUT—19 KEYBOARD

The JE600 Hexadecimal Keyboard provides two separate hexadecimal digits produced from sequential key entries to allow direct programming for 8 bit microprocessor or 6 bit memory chips. Three (3) additional keys are provided for user operations with one having a bistable output available. The outputs are latched and monitored with LED readouts. Also included is a key entry strobe.

JE600\$59.95

JE300\$39.95

TELEPHONE/KEYBOARD CHIPS		
AY-5-9100	Push Button Telephone Dialer	\$14.95
AY-5-9200	Rotary Dial Telephone Dialer	14.95
AY-5-9500	CMOS Clock Generator	4.95
AY-5-2376	Keyboard Encoder (88 keys)	14.95
HD0165	Keyboard Encoder (16 keys)	7.95
74C922	Keyboard Encoder (16 keys)	5.95

ICM CHIPS		
ICM7045	CMOS Precision Timer	24.95
ICM7205	CMOS LED Stopwatch/Timer	19.95
ICM7206	Oscillator Controller	7.50
ICM7208	Seven Decade Counter	19.95
ICM7209	Clock Generator	6.95

NMOS READ ONLY MEMORIES		
MCM6571	128 X 9 X 7 ASCII Shifted with Greek	13.50
MCM6574	128 X 9 X 7 Math Symbol & Pictures	13.50
MCM6575	128 X 9 X 7 Alphabetical Control Character Generator	13.50

MISCELLANEOUS		
TL074CN	Quad Low Noise Bi-Fet Op Amp	2.49
TL494CN	Switching Regulator	4.49
TL496CP	Single Switching Regulator	1.75
11100	Divide 10:1 Prescaler	19.95
95490	High Speed Divide 10:1 Prescaler	11.95
4N33	Photo-Darlington Opto-Isolator	3.95
MK50240	Top Octave Freq. Generator	17.50
DS00026CH	5MHz 2-phase MOS clock generator	15.50
1177	777 read only memory logic chip	10.50
MM5320	TV Camera Sync. Generator	14.85
MM5330	4 1/2 Digit DPM Logic Block (Special)	3.95
LD1101/11	3 1/2 Digit A/D Converter Set	25.00/set

C/MOS					
CD4000	.23		CD4070	.55	
CD4001	.23		CD4071	.23	
CD4002	.23	CD4028	.89	CD4072	.4
CD4006	1.19	CD4029	1.19	CD4076	1.33
CD4007	.25	CD4032	.49	CD4081	.23
CD4009	.49	CD4035	.96	CD4082	.2
CD4010	.49	CD4040	1.19	CD4083	.23
CD4011	.23	CD4041	1.25	CD4084	.23
CD4012	.25	CD4042	.89	CD4085	14.9
CD4013	.39	CD4043	.89	MC14098	14.9
CD4014	1.39	CD4044	.89	MC14411	14.9
CD4015	1.19	CD4046	1.79	MC14419	.49
CD4016	.49	CD4048	2.50	MC14420	19.9
CD4017	1.19	CD4048	1.33	MC14506	.7
CD4018	.99	CD4049	.49	MC14507	.9
CD4019	.49	CD4050	.49	MC14562	14.56
CD4020	1.19	CD4051	1.19	MC14563	14.56
CD4021	1.39	CD4053	.19	CD5048	3.9
CD4022	1.19	CD4056	2.95	CD5051	3.3
CD4023	.23	CD4059	.99	CD5110	3.3
CD4024	.79	CD4061	1.49	CD5124	2.9
CD4025	.23	CD4066	.79	CD519	1.2
CD4026	2.25	CD4068	.39	CD4520	1.2
CD4027	.69	CD4069	.45	CD4566	2.2
74C00	.39	74C00		74C183	2.49

DISCRETE LEDES

TYPE	POLARITY	HT	PRICE	TYPE	POLARITY	HT	PRICE
MAN 1	Common Anode-red	.270	2.95	MAN 6730	Common Anode-red ± 1	.560	.99
MAN 2	5 x 7 Dot Matrix-red	.300	4.95	MAN 6740	Common Anode-red ± D.D.	.560	.99
MAN 3	Common Cathode-red	.125	.95	MAN 6750	Common Cathode-red ± 1	.560	.99
MAN 4	Common Cathode-red	.187	1.95	MAN 6760	Common Cathode-red ± 1	.560	.99
MAN 76	Common Anode-yellow	.300	1.25	MAN 6780	Common Cathode-red ± 1	.560	.99
MAN 77	Common Anode-yellow	.300	.99	DL701	Common Cathode-red ± 1	.300	.99
MAN 78	Common Cathode-yellow	.300	.99	DL702	Common Cathode-red ± 1	.300	.99
MAN 84	Common Cathode-yellow	.300	1.25	DL707	Common Cathode-red	.300	.99
MAN 87	Common Cathode-yellow	.300	.99	DL728	Common Cathode-red	.500	1.49
MAN 88	Common Cathode-yellow	.300	.99	DL741	Common Cathode-red	.600	1.25
MAN 3620	Common Cathode-orange	.300	.99	DL746	Common Cathode-red ± 1	.630	1.49
MAN 3630	Common Cathode-orange ± 1	.300	.99	DL747	Common Cathode-red ± 1	.630	1.49
MAN 3640	Common Cathode-orange	.300	.99	DL749	Common Cathode-red ± 1	.630	1.49
MAN 4810	Common Cathode-orange	.300	.99	DL750	Common Cathode-red	.600	1.49
MAN 4840	Common Cathode-orange	.300	.99	DL338	Common Cathode-red	.110	.35
MAN 4710	Common Cathode-orange	.300	.99	DL7070	Common Cathode-red	.250	.99
MAN 4730	Common Cathode-orange ± 1	.300	.99	FDH38	Common Cathode-red ± 1	.357	.99
MAN 4740	Common Cathode-red	.300	.99	FDH39	Common Cathode-red	.357	.99
MAN 4810	Common Cathode-yellow	.300	.99	FDH503	Common Cathode(FHD500)	.500	.99
MAN 4840	Common Cathode-yellow	.300	.99	FDH507	Common Cathode(FHD510)	.500	.99
MAN 4850	Common Cathode-yellow	.300	.99	FDH514	Common Cathode(FHD510)	.500	.99
MAN 4860	Common Cathode-yellow	.300	.99	FDH515	Common Cathode(FHD510)	.500	.99
MAN 4870	Common Cathode-yellow	.300	.99	FDH516	Common Cathode(FHD510)	.500	.99
MAN 4880	Common Cathode-yellow	.300	.99	FDH517	Common Cathode(FHD510)	.500	.99
MAN 4890	Common Cathode-yellow	.300	.99	FDH518	Common Cathode(FHD510)	.500	.99
MAN 4900	Common Cathode-yellow	.300	.99	FDH519	Common Cathode(FHD510)	.500	.99
MAN 4910	Common Cathode-yellow	.300	.99	FDH520	Common Cathode(FHD510)	.500	.99
MAN 4920	Common Cathode-yellow	.300	.99	FDH521	Common Cathode(FHD510)	.500	.99
MAN 4930	Common Cathode-yellow	.300	.99	FDH522	Common Cathode(FHD510)	.500	.99
MAN 4940	Common Cathode-yellow	.300	.99	FDH523	Common Cathode(FHD510)	.500	.99
MAN 4950	Common Cathode-yellow	.300	.99	FDH524	Common Cathode(FHD510)	.500	.99
MAN 4960	Common Cathode-yellow	.300	.99	FDH525	Common Cathode(FHD510)	.500	.99
MAN 4970	Common Cathode-yellow	.300	.99	FDH526	Common Cathode(FHD510)	.500	.99
MAN 4980	Common Cathode-yellow	.300	.99	FDH527	Common Cathode(FHD510)	.500	.99
MAN 4990	Common Cathode-yellow	.300	.99	FDH528	Common Cathode(FHD510)	.500	.99
MAN 5000	Common Cathode-yellow	.300	.99	FDH529	Common Cathode(FHD510)	.500	.99
MAN 5010	Common Cathode-yellow	.300	.99	FDH530	Common Cathode(FHD510)	.500	.99
MAN 5020	Common Cathode-yellow	.300	.99	FDH531	Common Cathode(FHD510)	.500	.99
MAN 5030	Common Cathode-yellow	.300	.99	FDH532	Common Cathode(FHD510)	.500	.99
MAN 5040	Common Cathode-yellow	.300	.99	FDH533	Common Cathode(FHD510)	.500	.99
MAN 5050	Common Cathode-yellow	.300	.99	FDH534	Common Cathode(FHD510)	.500	.99
MAN 5060	Common Cathode-yellow	.300	.99	FDH535	Common Cathode(FHD510)	.500	.99
MAN 5070	Common Cathode-yellow	.300	.99	FDH536	Common Cathode(FHD510)	.500	.99
MAN 5080	Common Cathode-yellow	.300	.99	FDH537	Common Cathode(FHD510)	.500	.99
MAN 5090	Common Cathode-yellow	.300	.99	FDH538	Common Cathode(FHD510)	.500	.99
MAN 5100	Common Cathode-yellow	.300	.99	FDH539	Common Cathode(FHD510)	.500	.99
MAN 5110	Common Cathode-yellow	.300	.99	FDH540	Common Cathode(FHD510)	.500	.99
MAN 5120	Common Cathode-yellow	.300	.99	FDH541	Common Cathode(FHD510)	.500	.99
MAN 5130	Common Cathode-yellow	.300	.99	FDH542	Common Cathode(FHD510)	.500	.99
MAN 5140	Common Cathode-yellow	.300	.99	FDH543	Common Cathode(FHD510)	.500	.99
MAN 5150	Common Cathode-yellow	.300	.99	FDH544	Common Cathode(FHD510)	.500	.99
MAN 5160	Common Cathode-yellow	.300	.99	FDH545	Common Cathode(FHD510)	.500	.99
MAN 5170	Common Cathode-yellow	.300	.99	FDH546	Common Cathode(FHD510)	.500	.99
MAN 5180	Common Cathode-yellow	.300	.99	FDH547	Common Cathode(FHD510)	.500	.99
MAN 5190	Common Cathode-yellow	.300	.99	FDH548	Common Cathode(FHD510)	.500	.99
MAN 5200	Common Cathode-yellow	.300	.99	FDH549	Common Cathode(FHD510)	.500	.99
MAN 5210	Common Cathode-yellow	.300	.99	FDH550	Common Cathode(FHD510)	.500	.99
MAN 5220	Common Cathode-yellow	.300	.99	FDH551	Common Cathode(FHD510)	.500	.99
MAN 5230	Common Cathode-yellow	.300	.99	FDH552	Common Cathode(FHD510)	.500	.99
MAN 5240	Common Cathode-yellow	.300	.99	FDH553	Common Cathode(FHD510)	.500	.99
MAN 5250	Common Cathode-yellow	.300	.99	FDH554	Common Cathode(FHD510)	.500	.99
MAN 5260	Common Cathode-yellow	.300	.99	FDH555	Common Cathode(FHD510)	.500	.99
MAN 5270	Common Cathode-yellow	.300	.99	FDH556	Common Cathode(FHD510)	.500	.99
MAN 5280	Common Cathode-yellow	.300	.99	FDH557	Common Cathode(FHD510)	.500	.99
MAN 5290	Common Cathode-yellow	.300	.99	FDH558	Common Cathode(FHD510)	.500	.99
MAN 5300	Common Cathode-yellow	.300	.99	FDH559	Common Cathode(FHD510)	.500	.99
MAN 5310	Common Cathode-yellow	.300	.99	FDH560	Common Cathode(FHD510)	.500	.99
MAN 5320	Common Cathode-yellow	.300	.99	FDH561	Common Cathode(FHD510)	.500	.99
MAN 5330	Common Cathode-yellow	.300	.99	FDH562	Common Cathode(FHD510)	.500	.99
MAN 5340	Common Cathode-yellow	.300	.99	FDH563	Common Cathode(FHD510)	.500	.99
MAN 5350	Common Cathode-yellow	.300	.99	FDH564	Common Cathode(FHD510)	.500	.99
MAN 5360	Common Cathode-yellow	.300	.99	FDH565	Common Cathode(FHD510)	.500	.99
MAN 5370	Common Cathode-yellow	.300	.99	FDH566	Common Cathode(FHD510)	.500	.99
MAN 5380	Common Cathode-yellow	.300	.99	FDH567	Common Cathode(FHD510)	.500	.99
MAN 5390	Common Cathode-yellow	.300	.99	FDH568	Common Cathode(FHD510)	.500	.99
MAN 5400	Common Cathode-yellow	.300	.99	FDH569	Common Cathode(FHD510)	.500	.99
MAN 5410	Common Cathode-yellow	.300	.99	FDH570	Common Cathode(FHD510)	.500	.99
MAN 5420	Common Cathode-yellow	.300	.99	FDH571	Common Cathode(FHD510)	.500	.99

Transistor Checker

— Completely Assembled —
— Battery Operated —

The ASI Transistor Checker is capable of checking a wide range of transistor types, either "in circuit" or out of circuit. To operate, simply plug the transistor to be checked into the front panel socket, or connect it with the alligator clip test leads provided. The unit safely and automatically identifies low, medium and high-power PNP and NPN transistors. Size: 3 1/2" x 6 1/2" x 2 1/2". "C" cell battery not included.

Trans-Check \$29.95 ea.

Custom Cables & Jumpers



Part No.	Cable Length	Connectors	Price
DB25P-4-P	4 ft.	2-DB25P	\$15.95 ea.
DB25P-4-S	4 ft.	1-DB25P/1-25S	\$16.95 ea.
DB25S-4-S	4 ft.	2-DB25S	\$17.95 ea.

Dip Jumpers

DJ14-1	1 ft.	1-14 Pin	\$1.59 ea.
DJ16-1	1 ft.	1-16 Pin	1.79 ea.
DJ18-1	1 ft.	1-24 Pin	2.79 ea.
DJ14-1-14	1 ft.	2-14 Pin	2.79 ea.
DJ16-1-16	1 ft.	2-16 Pin	3.19 ea.
DJ24-1-24	1 ft.	2-24 Pin	4.95 ea.

For Custom Cables & Jumpers, See JAMECO 1979 Catalog for Pricing

CONNECTORS

25 Pin-D Subminiature

DB25P (as pictured)	PLUG (Meets RS232)	\$2.95
DB25S	SOCKET (Meets RS232)	\$3.50
DB51226-1	Cable Cover for DB25P or DB25S	\$1.75

PRINTED CIRCUIT EDGE-CARD

156 Spacing-Tin-Double Read-Out — Solderless Contacts — Fits .054 to .070 P.C. Cards

15/30	PINS (Solder Eyelet)	\$1.95
18/36	PINS (Solder Eyelet)	\$2.49
22/44	PINS (Solder Eyelet)	\$2.95
50/100 (.100 Spacing)	PINS (Wire Wrap)	\$6.95
50/100 (.125 Spacing)	PINS (Wire Wrap)	R681-1 \$6.95

4-Digit Clock Kit

- Bright .357" ht. red display
- Sequential flashing colon
- 12 or 24 hour operation
- Extruded aluminum case (black)
- Pressure switches for hours, minutes & hold functions
- Includes all components, case and wall transformer
- Size: 3 1/4" x 1 3/4" x 1 1/4"

JE730 \$14.95

Jumbo
6-Digit Clock Kit

- Four .630" ht. and two .300" ht. common anode displays
- Uses MM5314 clock chip
- Switches for hours, minutes and hold functions
- Hours easily viewable to 30 feet
- Simulated walnut case
- 115 VAC operation
- 12 or 24 hour operation
- Includes all components, case and wall transformer
- Size: 6 1/4" x 3 1/4" x 1 1/4"

JE747 \$29.95

JE701

6-Digit Clock Kit \$19.95

REMOTE CONTROL
TRANSMITTER & RECEIVER

- Can be used as remote control for TV
- Use it for your own car alarm, door opener
- Transmits in three, three and 11 kHz
- Frequency of use for remote control application
- Transmitter uses a 1.5V battery
- Receivers included

\$19.95

Digital Stopwatch Kit

- Use Intel 8205 Chip
- Plated thru double-sided P.C. Board
- LED display (red)
- Times to 99 min. 59.99 sec. with auto reset
- Quartz crystal controller
- Three stopwatches in one: single event, split (cumulative) & Taylor (sequential timing)
- Uses 3 penlite batteries
- Size: 4.5" x 2.15" x .90"

JE900 \$39.95

MICROPROCESSOR COMPONENTS

8080/8085 SUPPORT DEVICES			MICROPROCESSOR MANUALS		
8080A	CPU	\$ 9.95	M-280	User Manual	\$7.50
8212	8-Bit Input/Output	3.25	M-CDP1802	User Manual	7.50
8214	Priority Interrupt Control	5.95	M-2650	User Manual	5.00
8216	8-Directional Bus Driver	3.49			
8234	Clock Generator/Driver	3.49			
8226	Bus Driver	3.49			
8228	System Controller/Bus Driver	5.95			
8238	System Controller	5.95			
8251	Prog. Control I/O (USART)	7.95			
8253	Prog. Interval Timer	14.95			
8255	Prog. Periph. I/O (PPI)	9.95			
8257	Prog. DMA Control	19.95			
8259	Prog. Interrupt Control	19.95			
8080/8085 SUPPORT DEVICES			ROM'S		
MC6800	MPU	\$14.95	2513(2140)	Character Generator (upper case)	\$9.95
MC6802CP	MPU with Clock and Ram	24.95	2513(3021)	Character Generator (lower case)	9.95
MC6810AP1	128K Static Ram	5.95	2516	Character Generator	10.95
MC6821	Periph. Inter. Adapt (MC6820)	7.49	MM5230N	2048-Bit Read Only Memory	1.95
MC6829	Priority Interrupt Controller	12.95			
MC6830L8	1024X8 Bit ROM (MC6830-8)	14.95			
MC6850	Asynchronous Comm. Adapter	7.95			
MC6852	Synchronous Serial Data Adapt.	14.95			
MC6855	0-500 cps Digital MODEM	12.95			
MC6856	2400 bps Modulator	14.95			
MC6860A	Quad 3-State Bus Trans. (MC6826)	2.25			
MICROPROCESSOR CHIPS—MISCELLANEOUS			RAM'S		
Z80(780C)	CPU	\$19.95	1101	256K1 Static	\$1.49
Z80A(780-1)	CPU	24.95	1103	1024K1 Dynamic	.99
8201802	CPU	19.95	2101(8101)	256K4 Static	3.95
2650	MPU	19.95	2102	1024K1 Static	1.75
8502	CPU	11.95	2112	1024K1 Static	1.95
8035	CPU	19.95	2111(8111)	256K4 Static	3.95
8035	CPU	19.95	2112	256K4 Static MOS	4.85
8085	8-Bit MPU w/clock, RAM, I/O lines	19.95	2114	1024K4 Static 450ns	9.95
8085	8-Bit MPU w/hardware, multiply & divide	49.95	2114	1024K4 Static 450ns low power	10.95
SHIFT REGISTERS			2114-3	1024K4 Static 300ns	10.95
MM500H	Dual 25 Bit Dynamic	\$5.50	5101	256K4 Static 300ns low power	11.95
MM503H	Dual 50 Bit Dynamic	.50	5280/2107	4096K1 Dynamic	4.95
MM504H	Dual 16 Bit Static	1.50	748200	Static Tristate	4.95
MM505H	Dual 100 Bit Static	4.95	93421	256K1 Static	2.95
MM510H	Dual 64 Bit Accumulator	.50	UPD414	4K1 Dynamic 16 pin	4.95
MM510H	500/512 Bit Dynamic	.69	UPD416	16K1 Dynamic 16 pin	9.95
2504T	1024 Dynamic	3.95			
2516	Hex 32 Bit Static	4.95			
2522	Dual 132 Bit Static	2.95			
2524	512 Static	.99			
2525	1024 Dynamic	2.95			
2527	Dual 256 Bit Static	2.95			
2528	Dual 256 Static	4.00			
2529	Dual 240 Bit Static	4.00			
2532	Quad 80 Bit Static	2.95			
2533	1024 Static	2.95			
2541	716	2.49			
74LS670	4X4 Register File (Tristate)	2.49			
	UART's				
A-1-Y-5-1013	30K Baud	5.95			


CONTINENTAL SPECIALTIES

Proto Board 203




Model Number	L x W x H (Inches)	Price
PB-6	6.0 x 4.5 x 1.4	\$15.95
PB-100	6.0 x 4.5 x 1.4	\$19.95
PB-101	6.0 x 4.5 x 1.4	\$22.95

Proto Board 203A



Model Number	L x W x H (Inches)	Price
PB-102	7.0 x 4.5 x 1.4	\$26.95
PB-103	9.0 x 5.0 x 1.4	\$44.95
PB-104	9.8 x 8.0 x 1.4	\$54.95

THE SINCLAIR MOD35



Options: AC adapter for 117 V 60 Hz power. De-luxe padded carrying wallet.

PDMS35: Digital Multimeter . . . \$59.95 (completely assembled)
PDM-AC: 117V AC Adapter . . . 6.95
PDM-DX: Deluxe padded carrying case. . . 6.95

100 Mhz
8-Digit Counter

ACCESSORIES FOR MAX 100:
Mobile Charger/Eliminator
Charger/Eliminator
Use 110 V AC

Model 100 — CLA \$3.95
Model 100 — CAI \$9.95


REGULATED POWER SUPPLY

JE200 5V-1 AMP POWER SUPPLY



JE200 \$14.95

JE205 ADAPTER BOARD



JE205 \$12.95

\$10.00 Min. Order — U.S. Funds Only
Calif. Residents Add 6% Sales Tax
Postage—Add \$5 plus 1% Insurance (if desired)

FREE 1979 CATALOG

Jameco ELECTRONICS

MAIL ORDER ELECTRONICS — WORLDWIDE
1021 HOWARD AVENUE, SAN CARLOS, CA 94070
ADVERTISED PRICES GOOD THRU AUGUST

The Incredible

"Pennywhistle 103"



\$139.95 Kit Only

The Pennywhistle 103 is capable of recording data to and from audio tape without critical speed requirements for the recorder and it is able to communicate directly with another modem and terminal for telephone "banning" and communications. In addition, it is free of critical adjustments and is built with non-precision, readily available parts.

Data Transmission Method . . . Frequency-Shift Keying, full-duplex (half-duplex selectable).
Maximum Data Rate . . . 300 Baud.
Data Format . . . Asynchronous Serial (return to mark level required between each character).

Receive Channel Frequencies . . . 2025 Hz for space, 2225 Hz for mark.
Transmit Channel Frequencies . . . Switch selectable: Low (normal) = 1070 space, 1270 mark, High = 025 space, 2225 mark.

Receive Sensitivity . . . -46 dbm acoustically coupled.
Transmit Level . . . -15 dbm nominal. Adjustable from -8 dbm to -20 dbm.

Receive Frequency Tolerance . . . Frequency reference automatically adjusts to allow for operation between 1800 Hz and 2400 Hz.
Digital Data Interface . . . EIA RS-232C or 20 mA current loop (receiver is optoisolated and non-polar).
Power Requirements . . . 120 VAC, single phase, 10 Watts.

Physical . . . All components mount on a single 5" by 8" printed circuit board. All components included.
Requires a VOM, Audio Oscillator, Frequency Counter and/or Oscilloscope to align.

TRS-80

16K Conversion Kit


Expand your 4K TRS-80 System to 16K. Kit comes complete with:

- 8 each UPD416-1 (16K Dynamic Rams) 250NS
- Documentation for conversion

TRS-16K \$75.00

COMPUTER CASSETTES

6 EACH 15 MINUTE HIGH QUALITY C-15 CASSETTES
PLASTIC CASE INCLUDED
12 CASSETTE CAPACITY
ADDITIONAL CASSETTES AVAILABLE #C-15-\$2.95 ea



CAS-6 \$14.95 (Case and 6 Cassettes)

SUP 'R' MOD II

UHF Channel 33 TV Interface Unit Kit
Wide Band B/W or Color System
Converts TV to Video Display for home computers, CCTV camera, Apple II, works with Cromeco Dazler, SOL-20, IRS-80, Challenger, etc.
MOD II is pretuned to Channel 33 (UHF).
Includes coaxial cable and antenna transformer.

MOD II \$29.95 Kit

Function Generator Kit




JE2206B \$19.95

IDEAL FOR TRS 80

"Plug/Jack interface to any computer system requiring remote control of cassette functions".
The CC-100 controls cassette motor functions, monitors tape location with its internal speaker and requires no power. Eliminates the plugging and unplugging of cables during computer loading operation from cassette.

#CC-100 \$29.50

63-Key Unencoded Keyboard



This is a 63-key, terminal keyboard newly manufactured by a large computer manufacturer. It is unencoded with SPST keys, unattached to any kind of PC board. A very solid molded plastic 13 x 4" base suits most application. IN STOCK \$29.95/each

Hexadecimal Unencoded Keypad

19-key pad includes 1-10 keys, ABCDEF and 2 optional keys and a shift key.
\$10.95/each


FREE DATA SHEETS!

IN OUR EFFORTS TO KEEP YOU, OUR CUSTOMERS, UP-TO-DATE, WE ARE HAPPY TO OFFER YOU FREE DATA SHEETS FOR ALL ICs THAT WE CARRY. THESE ARE HIGH QUALITY, FULL-LENGTH REPRODUCTIONS OF ORIGINAL MANUFACTURERS' DATA SHEETS. WE REQUEST, HOWEVER, THAT YOU LIMIT YOUR REQUESTS TO ONE DATA SHEET FOR EACH DOLLAR WORTH OF MERCHANDISE THAT YOU PURCHASE FROM US.

7400	74198	74199	74200	74201	74202	74203	74204	74205	74206	74207	74208	74209	74210	74211	74212	74213	74214	74215	74216	74217	74218	74219	74220	74221	74222	74223	74224	74225	74226	74227	74228	74229	74230	74231	74232	74233	74234	74235	74236	74237	74238	74239	74240	74241	74242	74243	74244	74245	74246	74247	74248	74249	74250	74251	74252	74253	74254	74255	74256	74257	74258	74259	74260	74261	74262	74263	74264	74265	74266	74267	74268	74269	74270	74271	74272	74273	74274	74275	74276	74277	74278	74279	74280	74281	74282	74283	74284	74285	74286	74287	74288	74289	74290	74291	74292	74293	74294	74295	74296	74297	74298	74299	74300	74301	74302	74303	74304	74305	74306	74307	74308	74309	74310	74311	74312	74313	74314	74315	74316	74317	74318	74319	74320	74321	74322	74323	74324	74325	74326	74327	74328	74329	74330	74331	74332	74333	74334	74335	74336	74337	74338	74339	74340	74341	74342	74343	74344	74345	74346	74347	74348	74349	74350	74351	74352	74353	74354	74355	74356	74357	74358	74359	74360	74361	74362	74363	74364	74365	74366	74367	74368	74369	74370	74371	74372	74373	74374	74375	74376	74377	74378	74379	74380	74381	74382	74383	74384	74385	74386	74387	74388	74389	74390	74391	74392	74393	74394	74395	74396	74397	74398	74399	74400	74401	74402	74403	74404	74405	74406	74407	74408	74409	74410	74411	74412	74413	74414	74415	74416	74417	74418	74419	74420	74421	74422	74423	74424	74425	74426	74427	74428	74429	74430	74431	74432	74433	74434	74435	74436	74437	74438	74439	74440	74441	74442	74443	74444	74445	74446	74447	74448	74449	74450	74451	74452	74453	74454	74455	74456	74457	74458	74459	74460	74461	74462	74463	74464	74465	74466	74467	74468	74469	74470	74471	74472	74473	74474	74475	74476	74477	74478	74479	74480	74481	74482	74483	74484	74485	74486	74487	74488	74489	74490	74491	74492	74493	74494	74495	74496	74497	74498	74499	74500	74501	74502	74503	74504	74505	74506	74507	74508	74509	74510	74511	74512	74513	74514	74515	74516	74517	74518	74519	74520	74521	74522	74523	74524	74525	74526	74527	74528	74529	74530	74531	74532	74533	74534	74535	74536	74537	74538	74539	74540	74541	74542	74543	74544	74545	74546	74547	74548	74549	74550	74551	74552	74553	74554	74555	74556	74557	74558	74559	74560	74561	74562	74563	74564	74565	74566	74567	74568	74569	74570	74571	74572	74573	74574	74575	74576	74577	74578	74579	74580	74581	74582	74583	74584	74585	74586	74587	74588	74589	74590	74591	74592	74593	74594	74595	74596	74597	74598	74599	74600	74601	74602	74603	74604	74605	74606	74607	74608	74609	74610	74611	74612	74613	74614	74615	74616	74617	74618	74619	74620	74621	74622	74623	74624	74625	74626	74627	74628	74629	74630	74631	74632	74633	74634	74635	74636	74637	74638	74639	74640	74641	74642	74643	74644	74645	74646	74647	74648	74649	74650	74651	74652	74653	74654	74655	74656	74657	74658	74659	74660	74661	74662	74663	74664	74665	74666	74667	74668	74669	74670	74671	74672	74673	74674	74675	74676	74677	74678	74679	74680	74681	74682	74683	74684	74685	74686	74687	74688	74689	74690	74691	74692	74693	74694	74695	74696	74697	74698	74699	74700	74701	74702	74703	74704	74705	74706	74707	74708	74709	74710	74711	74712	74713	74714	74715	74716	74717	74718	74719	74720	74721	74722	74723	74724	74725	74726	74727	74728	74729	74730	74731	74732	74733	74734	74735	74736	74737	74738	74739	74740	74741	74742	74743	74744	74745	74746	74747	74748	74749	74750	74751	74752	74753	74754	74755	74756	74757	74758	74759	74760	74761	74762	74763	74764	74765	74766	74767	74768	74769	74770	74771	74772	74773	74774	74775	74776	74777	74778	74779	74780	74781	74782	74783	74784	74785	74786	74787	74788	74789	74790	74791	74792	74793	74794	74795	74796	74797	74798	74799	74800	74801	74802	74803	74804	74805	74806	74807	74808	74809	74810	74811	74812	74813	74814	74815	74816	74817	74818	74819	74820	74821	74822	74823	74824	74825	74826	74827	74828	74829	74830	74831	74832	74833	74834	74835	74836	74837	74838	74839	74840	74841	74842	74843	74844	74845	74846	74847	74848	74849	74850	74851	74852	74853	74854	74855	74856	74857	74858	74859	74860	74861	74862	74863	74864	74865	74866	74867	74868	74869	74870	74871	74872	74873	74874	74875	74876	74877	74878	74879	74880	74881	74882	74883	74884	74885	74886	74887	74888	74889	74890	74891	74892	74893	74894	74895	74896	74897	74898	74899	74900	74901	74902	74903	74904	74905	74906	74907	74908	74909	74910	74911	74912	74913	74914	74915	74916	74917	74918	74919	74920	74921	74922	74923	74924	74925	74926	74927	74928	74929	74930	74931	74932	74933	74934	74935	74936	74937	74938	74939	74940	74941	74942	74943	74944	74945	74946	74947	74948	74949	74950	74951	74952	74953	74954	74955	74956	74957	74958	74959	74960	74961	74962	74963	74964	74965	74966	74967	74968	74969	74970	74971	74972	74973	74974	74975	74976	74977	74978	74979	74980	74981	74982	74983	74984	74985	74986	74987	74988	74989	74990	74991	74992	74993	74994	74995	74996	74997	74998	74999	75000	75001	75002	75003	75004	75005	75006	75007	75008	75009	75010	75011	75012	75013	75014	75015	75016	75017	75018	75019	75020	75021	75022	75023	75024	75025	75026	75027	75028	75029	75030	75031	75032	75033	75034	75035	75036	75037	75038	75039	75040	75041	75042	75043	75044	75045	75046	75047	75048	75049	75050	75051	75052	75053	75054	75055	75056	75057	75058	75059	75060	75061	75062	75063	75064	75065	75066	75067	75068	75069	75070	75071	75072	75073	75074	75075	75076	75077	75078	75079	75080	75081	75082	75083	75084	75085	75086	75087	75088	75089	75090	75091	75092	75093	75094	75095	75096	75097	75098	75099	75100	75101	75102	75103	75104	75105	75106	75107	75108	75109	75110	75111	75112	75113	75114	75115	75116	75117	75118	75119	75120	75121	75122	75123	75124	75125	75126	75127	75128	75129	75130	75131	75132	75133	75134	75135	75136	75137	75138	75139	75140	75141	75142	75143	75144	75145	75146	75147	75148	75149	75150	75151	75152	75153	75154	75155	75156	75157	75158	75159	75160	75161	75162	75163	75164	75165	75166	75167	75168	75169	75170	75171	75172	75173	75174	75175	75176	75177	75178	75179	75180	75181	75182	75183	75184	75185	75186	75187	75188	75189	75190	75191	75192	75193	75194	75195	75196	75197	75198	75199	75200	75201	75202	75203	75204	75205	75206	75207	75208	75209	75210	75211	75212	75213	75214	75215	75216	75217	75218	75219	75220	75221	75222	75223	75224	75225	75226	75227	75228	75229	75230	75231	75232	75233	75234	75235	75236	75237	75238	75239	75240	75241	75242	75243	75244	75245	75246	75247	75248	75249	75250	75251	75252	75253	75254	75255	75256	75257	75258	75259	75260	75261	75262	75263	75264	75265	75266	75267	75268	75269	75270	75271	75272	75273	75274	75275	75276	75277	75278	75279	75280	75281	75282	75283	75284	75285	75286	75287	75288	75289	75290	75291	75292	75293	75294	75295	75296	75297	75298	75299	75300	75301	75302	75303	75304	75305	75306	75307	75308	75309	75310	75311	75312	75313	75314	75315	75316	75317	75318	75319	75320	75321	75322	75323	75324	75325	75326	75327	75328	75329	75330	75331	75332	75333	75334	75335	75336	75337	75338	75339	75340	75341	75342	75343	75344	75345	75346	75347	75348	75349	75350	75351	75352	75353	75354	75355	75356	75357	75358	75359	75360	75361	75362	75363	75364	75365	75366	75367	75368	75369	75370	75371	75372	75373	75374	75375	75376	75377	75378	75379	75380	75381	75382	75383	75384	75385	75386	75387	75388	75389	75390	75391	75392	75393	75394	75395	75396	75397	75398	75399	75400	75401	75402	75403	75404	75405	75406	75407	75408	75409	75410	75411	75412	75413	75414
------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

HICKOK 3 1/2 Digit Mini-Multimeter

- 100 mV DC FS Sensitivity
- 19 Ranges and Functions
- 200 Hours 9V Battery Life
- Auto Zero, Polarity, Overrange Indication



BK PRECISION 3 1/2-Digit Portable DMM

- Overhead Protected • Battery or AC operation • 2" High LED Display • Auto Zeroing

Model 2800

comes complete with test leads, operating manual and spare fuses

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Model 2800 \$85

Model 2810 \$110.50

Ungar Heat Gun

Reg \$65.00

\$46.50

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810

Model 2800

Model 2810


Model 2800

Model 2810

Model 2800

Model 2810

SENCORE TV-VTR-MATV and Video Analyzer



Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

Model LX 303

CONTINENTAL SPECIALTIES

100 MHz 8-Digit Counter \$119.00

• 20 Hz 100 MHz Range • 6" LED Display • Fully Automatic

• Includes 100 IPC

Now Available

PS500 500MHZ Prescaler \$52.95

Model 1500

Model 1400 \$199.95

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

Model 1500

Model 1400

BSR Changer Accessories

\$29.95

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Model BSR 129

Weller Xcelite

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Service Master Attache Style Tool Kit

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM

Model 99SM</

Intersil LED or LCD 3½ DIGIT PANEL METER KITS

**BUILD A WORKING DPM IN 1/2 HOUR WITH
THESE COMPLETE EVALUATION KITS**

Test these new parts for yourself with Intersil's low cost prototyping kits, complete with A/D converter and LCD display for the 7100 or LED display for the 7101. Kits provide all materials, including PC board, for a functioning panel meter.

ICL7100EV (LCD) \$29.95	ICL7101 (LED) \$24.95
--------------------------------	------------------------------



CG 4103	\$12.00	CG 4103	\$12.00
COM 1671	42.00	COM 1671	42.00
COM 2017	15.00	COM 2017	15.00
COM 2017P	5.70	COM 2017P	5.70
COM 2017H	15.00	COM 2017H	15.00
COM 2017HP	5.70	COM 2017HP	5.70
COM 2502	15.00	COM 2502	15.00
COM 2502P	8.00	COM 2502P	8.00
COM 2502H	15.00	COM 2502H	15.00
COM 2502HP	8.00	COM 2502HP	8.00
COM 2601	30.00	COM 2601	30.00
COM 2601P	29.00	COM 2601P	29.00
COM 5016	13.20	COM 5016	13.20
COM 5016P	12.70	COM 5016P	12.70
COM 5016T	12.90	COM 5016T	12.90

NEW 30 MEG

OM 5016TF	\$12.40	COM 8502P	8.00
OM 5025	10.00	CRT 5027	5.00
OM 5025P	28.00	CRT 6027P	42.00
OM 5026	11.00	CRT 5037	50.00
OM 5026P	10.50	CRT 6037P	49.00
OM 5026T	10.70	CRT 7004A	19.00
OM 5026TP	10.20	CRT 7004B	18.00
OM 5027	13.20	CRT 8004A	16.20
OM 5036P	12.70	CRT 8002B	30.00
OM 5036T	12.90	CRT 8002C	35.00
OM 5036TP	12.40	CRT 8002C	30.00
OM 5046	11.00	FDC 3400P	14.00
OM 5046P	10.50	KR 2376ST	20.00
OM 5046T	10.70	KR 2376STP	22.00
OM 5046TP	10.20	KR 3600ST	12.00

GAHERTZ PORTABLE, DUAL TRACE
MINI-SCOPE



DIGITAL LX 303 MULTIMETER

HICKOK
 Compact. Accurate. Dependable. With easy-to-read 3 1/2" liquid crystal display for convenient use in any kind of light. Weighs only 8 ounces. Operates up to 200 hrs on a single 9 volt battery. Nineteen ranges including 200mV to 1000V DC, 100 to 10 Megaohms, 100 and 1000 VAC ranges, 10uA and 10mA ranges. Excellent overload protection, color coordinated case and color coded panel.

\$74.95



HYBRID AUDIO POWER AMPLIFIERS

	P/N Power SI-1010G(10W) \$ 6.95 SI-1020G(20W) \$13.95 A-SI-8(Socket for above) SI-1030G(30W) \$19.00 SI-1050G(50W) \$27.80 A-SI-10(Socket for above)	* Matching Transformer TR15 \$ 7.90 TR20 \$10.90 TR30 \$12.90 TR50 \$17.90 A-SI-10(Socket for above)
		.95 .95 .95

* Note: One Transformer can power two audio amplifiers.

5% CARBON FILM RESISTORS

All values from 10 Ω to 10M Ω — Only in multiples of 100 pieces per value

 <p>ANCONRA</p> <p>P.O. Box 22008, Culver City, CA 90230. California residents add 8% sales tax. Minimum Order: \$10.00 to cover postage and handling. Master Charge and Visa welcomed. Please include your charge card number, interbank number and expiration date.</p>	<p>Send your check or Money Order to:</p> <p>ANCONRA</p> <p>1300 E. Edinger Ave. Santa Ana, CA 92705 (714) 547-8624</p>	<p>% Watt \$1.69/pc 100 % Watt \$1.79/pc 100</p>
--	--	--

TUCSON	CULVER CITY	SANTA ANA	PORTLAND
4518 E. Broadway Tucson, AZ 85711 (602) 881-2348	11080 Jefferson Blvd. Culver City, CA 90230 (213) 390-3585	1300 E. Edinger Ave. Santa Ana, CA 92705 (714) 547-8624	1126 N.E. 82nd Ave. Housten, TX 97220 (503) 254-5541
CANADA: B.C. ANCONRA	SUNNYSIDE	ATLANTA	HOUSTON
8550 W. 104th Ave. Vancouver, B.C. V6V 1W7 (604) 324-0707	1054 E. El Camino Real Sunnyvale, CA 94087 (408) 243-4121	3330 Piedmont Rd., N.E. Atlanta, GA 30305 (404) 251-7100	2649 Richmond Houston, TX 77058 (713) 529-3489

NATIONAL SEMICONDUCTOR

JUMBO CLOCK MODULE



ASSEMBLED.
NOT A KIT!

MILITARY TIME FORMAT!

MA1008D
BRAND NEW!

\$4.95

\$7.95

REG. \$9.95

ADD \$1.95 FOR
AC XFMR

FEATURES

- FOUR JUMBO 1/2 INCH LED DISPLAYS
- 24 HR REAL TIME FORMAT
- 24 HR ALARM SIGNAL OUTPUT
- 50 OR 60 HZ OPERATION
- LED BRIGHTNESS CONTROL
- POWER FAILURE INDICATOR
- SLEEP & SNOOZE TIMERS
- DIRECT LED DRIVE (LOW RFI)
- COMES WITH FULL DATA


ZULU

50% OFF SALE!

**COMPARE AT UP TO TWICE
OUR PRICE!**

MANUFACTURER'S CLOSEOUT!

PERFECT FOR USE
WITH A TIMEBASE.

<p>DIP</p> <p>comes. 410 NS cycle 64K RAM boards tested devices by a</p> <p>\$79.50</p>	<p>EXPERIMENTER'S CRYSTAL</p>  <p>262, 144KHZ. This frequency is 2 to the 18th power. Easily divided down to any power of 2, and even to 1HZ. New by CTS-Knight. A \$5 value.</p> <p>\$1.25 each 4.00 MHZ — \$1.75</p>	<p>TOSHIBA POWER AUDIO AMP</p> <p>5.8 Watt RMS Typical Output. 50 to 30,000 $\text{HZ} \pm 3 \text{ DB}$. For CB's, tape decks, PA's, etc. Works off of a single supply voltage from 10.5 to 18 VDC. 10 Pin plastic DIP with special built in heat sink tab. Perfect for use on 12VDC. With Data.</p>
---	--	---

TARY POWER TRANSISTORS
PNP, TO-220 CASE.
10 WATTS
S, ETC.
YOUR CHOICE
3 FOR \$1

ANNOUNCEMENT:
To better serve our customers we are splitting Digital Research Corp of Texas into two operating sections: **PARTS AND COMPUTERS**. We feel this change will allow us to offer you lower prices, better service, and many more new products. Continue to order parts, clock modules, etc. from D.R.P., P.O. Box 401247 Garland, TX 75040. To order computer parts and computer kits order from Digital Research: Computers P.O. Box 401565 Garland, TX 75040.

Digital Research: Parts
(OF TEXAS)
P. O. BOX 401247 GARLAND, TEXAS 75040 • (214) 271-2461

ABOUT YOUR SUBSCRIPTION

Your subscription to POPULAR ELECTRONICS is maintained on one of the world's most modern, efficient computer systems, and if you're like 99% of our subscribers, you'll never have any reason to complain about your subscription service.

We have found that when complaints do arise, the majority of them occur because people have written their names or addresses differently at different times. For example, if your subscription were listed under "William Jones, Cedar Lane, Middletown, Arizona," and you were to renew it as "Bill Jones, Cedar Lane, Middletown, Arizona," our computer would think that two separate subscriptions were involved, and it would start sending you two copies of POPULAR ELECTRONICS each month. Other examples of combinations of names that would confuse the computer would include: John Henry Smith and Henry Smith; and Mrs. Joseph Jones and Mary Jones. Minor differences in addresses can also lead to difficulties. For example, to the computer, 100 Second St. is not the same as 100 2nd St.

So, please, when you write us about your subscription, be sure to enclose the mailing label from the cover of the magazine—or else copy your name and address exactly as they appear on the mailing label. This will greatly reduce any chance of error, and we will be able to service your request much more quickly.

SPECIAL Summer sale

Prices good from July 15 thru Aug. 31. Quantities are limited — order now and save!

MA1003 CLOCK MODULE ~~\$16.50~~ \$13.20

20% off our very best clock module. Internal xtal timebase, fluorescent readouts, full documentation, simple assembly (add 2 time-set switches and 12V DC — you're ready to go!) and much more. Matching case w/ mounting hardware & optical filter: \$5.95. Hurry — clock prices may never be this low again.

16K MEMORY EXPANSION CHIP SET ~~\$109~~ \$87.20

20% off one of our all-time best sellers. For Radio Shack-80, Exidy Sorcerer, Apple computers. 250 ns access time, low power parts, DIP shunts included, 1 year limited warranty, and easy-to-follow instructions that make memory expansion a snap.

MORE MEMORY FOR YOUR MONEY

We're offering low power 21L02 1K static memory chips, guaranteed to run with any 2 MHz system, at the very low price of 10/\$9.90... that's less than 1¢ per byte! Stock up now, we can't predict how much longer we'll have these prime parts available for sale.

TERMS: Cal. res. add tax. Allow 5% shipping, excess refunded; orders under \$15 add \$1 handling. VISA/Mastercharge® call 24 hr. order desk at (415) 562-0838. COD OK with street address for UPS.

GODBOUT

BILL GODBOUT ELECTRONICS
803 2355, OAKLAND AIRPORT, CA 94614

FREE FLYER: Whether you're a computer user, electronic musician, experimenter, or mad scientist, we have bargains for you... and they're all listed in our flyer (including lots of specials that are too provocative to put in family magazines such as this). Send us your name and address; add 41¢ in stamps for 1st class delivery.

H8 EXTENDER BOARD KIT

Brand new from Mullen Computer Products. This kit really takes the hassle out of testing or troubleshooting the popular Heath H8 computer. Includes jumper links in supply lines for insertion of fuses, Ammeters, current limiters, etc. **\$39**

LOW POWER, FULLY STATIC COMPUTER MEMORY — NOW BANK SELECT VERSIONS!

Econorams™ are generally available as unkits (sockets, bypass caps pre-soldered in place, assembled and tested, or qualified under the Certified System Component (CSC) high-reliability program.

Our BANK SELECT boards are perfect for Alpha Micro Systems, Marlinchip, and similar S-100 machines. Low power, two independently selectable banks.

We've been providing top quality memory (without charging top dollar) for over 5 years — see your computer store or our flyer for more information.

Name	Buss	Speed	Unkit	Assm	CSC
8K ECONORAM IIA™	S-100	4 MHz	\$149	\$179	\$239
16K ECONORAM IV™	S-100	4 MHz	\$295	\$329	\$429
12K ECONORAM VI™	H8	2 MHz	\$200	\$270	N/A
24K ECONORAM VII™	S-100	4 MHz	\$445	\$485	\$605
32K ECONORAM IX™	Org Grp	4 MHz	\$559	\$639	N/A
32K ECONORAM X™	S-100	4 MHz	\$599	\$649	\$789
32K ECONORAM XI™	SBC	4 MHz	N/A	N/A	\$1050

NEW! BANK SELECT ECONORAMS

16K ECONORAM XII-18	S-100	4 MHz	\$369	\$419	\$519
24K ECONORAM XII-24	S-100	4 MHz	\$479	\$539	\$649
32K ECONORAM XIII™	S-100	4 MHz	\$629	\$699	\$849


NEW! • FULL FUNCTION S-100 • DUAL CHANNEL I/O BOARD \$189 unkit, \$249 assm

Our new I/O board gives you unparalleled flexibility and operating convenience. Includes dual LSI hardware UARTS, precision Baud rates up to 19.2 Kbaud, operation with 2 and 4 MHz systems, and much more — at an amazingly low price. Before you buy an I/O board, write for complete specs and you'll see why we think you'll choose ours over any other.

CIRCLE NO. 26 ON FREE INFORMATION CARD

Wheel of Fortune Kit


Popular game device uses LED's, transistors & IC to give the effect of a bright red ball spinning around numbers. Unit emits a clicking sound as ball spins and finally stops on a number. Incl. all parts, faceplate & P-C board. C23806



\$8.99

T.V. Game Special


Reject "Video Olympiad" TV game units. Play 3 exciting color TV games, with on-screen digital scoring and realistic sound effects. You repair and save! C23872



\$8.95

Electronic Warning Flasher Kit

This battery operated device continuously emits bursts of intense light. Great for bicyclists, skiers, boaters & campers. Comes with all parts, quality PC board and easy-to-understand instructions. Uses high-output xenon flash tube which flashes 2 times per second when batteries are fresh. C23207



\$6.95

Strobe Kit

Complete variable rate strobe light kit. Contains all parts, line cord, PC board and instructions. 117V. C23071

\$7.50

6KV Trigger

COIL To fire xenon flash tubes. C23474



89¢

Strobe Tube Assortment

Brand new factory prime strobe tubes, 5 tubes, w/ schematics. C23280

\$3.00

Walkie Talkie

Reject units. Complete crystal controlled units w/ built-in antennas. Most are easy to fix. C23786



\$2.95

Calculator (reject)

Complete 4 function portable calculators w/ % key and constant function. Fix them and save. C23877



2 for \$5.98



• Minimum order \$5.00
• Please include \$1.00 for postage
• Visa, MC and COD accepted
• Phone orders are welcome

P.O. BOX 27038, DENVER, CO. 80227 (303) 781-5760

Send for our free giant catalog of unique items!!!

BEAT HIGH GAS PRICES!



CALL FREE
800-257-7955



ELECTRIFY YOUR BIKE!

PEDALPOWER exciting new bike drive tames tough hills. Be independent. Shop when you want. Fits all Bikes, Adult Trikes. Installs in minutes. Thousands sold. Recharges overnight. Travels 100 miles for a dime.

MONEY BACK GUARANTEE.

Call toll free: 800-257-7955*
Or send today for

FREE ILLUSTRATED

PEDALPOWER BOOKLET

Plus free information on complete line of Electric Cars, Electric Bikes and Trikes.

General Engines Co.

Mantua Blvd.

Sewell, N.J. 08080

*In N.J., Alaska, or HI. Call Collect: (609) 468-0270

CIRCLE NO. 25 ON FREE INFORMATION CARD

MICROWORLD™

BRINGING INFORMATION TECHNOLOGY TO YOUR DOORSTEP

- ✓ Quality Microcomputer Products
- ✓ Good Delivery
- ✓ Prices You Can Afford



\$1349

(reg. \$1599)

Double density HORIZON I KIT

Heath Data Systems Printer ...	\$ 895
IP-125 Printer by Integral Data .	\$ 749
TI-810 Impact Printer	\$1695
Soroc IQ 120 Video Terminal ..	\$ 795
Hazeltine 1500 Video Terminal .	\$ 995
Mime Terminal	\$ 742
Novation CAT Modem	\$ 199
Hitachi 9" Monitor	\$ 184

place your order TOLL FREE

1-800-528-1418

MICROWORLD™

1425 W. 12th Place
Tempe, AZ 85281
602-894-1193



CIRCLE NO. 37 ON FREE INFORMATION CARD

Operation Assist

If you need information on outdated or rare equipment—a schematic, parts list, etc.—another reader might be able to assist! Simply send a postcard to Operation Assist, POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. For those who can help readers, please respond directly to them. They'll appreciate it. (Only those items regarding equipment not available from normal sources are published.)

Elco model 720 amateur transmitter and universal modulator driver 730. Need operation manuals. Linford Fevrier, C/O Radio St. Lucia, Box 660, Castries, St. Lucia.

Dumont Fairchild model 766 oscilloscope with type 76-02 dual trace and type 74-13A delayed sweep plug-ins. Schematics. Gary Montgomery, 1011 Westwood Dr., Elkview, WV 25071.

Dumont type 280 oscillograph. Service manual. **RCA** model #WT-509A. Data manual needed. **Realistic** tape deck, model #T130. Schematic diagram and service manual needed. George Warren, 8 Darius Ct., So. Boston, MA 02127.

U.S. Navy model TS-810/U digital calibrator. Schematic and technical manual. Joel M. Rubin, Box 819, Berkeley, CA 94701.

Marcóniphone model T26A radio. Schematic and conversion data to 115 volts/60 cycles needed. Eddie Joseph, 20701 Reef Ln, Huntington Beach, CA 92646.

Heathkit receiver model AR-3. Schematic and assembly alignment manual. David Carpenter, 2717 E. 4th St., Tucson, AZ 85716.

B&K model 650 tube tester with model 610 and model TC-615 adapter panels. Tube test set-up chart needed. Larry Delahooke, Box 7423, Rochester, NY 14815.

Jerrold 900B sweep generator. Operation and service manual needed. Henry Koff, 4140 West 58th St., Chicago, IL 60629.

Cal Kit synthesize oscilloscope pattern generator. P.C. board, manual or schematic. R. Herbison, Box 108, Errington, B.C., Can. VOR-1V0.

Channel Master model 6601 stereo. Need schematic. James H. Bryan, 500 Benton Dr., Mt. Zion, IL 62549.

Magnavox model 1CV400 television camera and processor. Schematic and service manual needed. G. Amandes, 506 Lake St., Crystal Lake, IL 60014.

Lavoie model LA545 oscilloscope. Need schematics and maintenance information. William B. Rossman, 274-28th Ave., Longview, WA 98632.

Zenith model L514W clock radio. Need volume and tuning knobs and snooze alarm button. Ted Liszewski, 162 Farview Ave., Paramus, NJ 07652.

RCA model 118 AM radio. Need schematic and tubes 80, 41, 6B7, 6D6 and 6A7. Barry Maxfield, 431 E. 500 St., Pleasant Grove, UT 84062.

Redcor 990100-200 power supply and **Dynamics** 504 dc micromultimeter. Instructions and schematic. Jim Barcus, 12605-11th Ave., N., Plymouth, MN 55441.

RCA model V-215 Victrola. Schematic needed. Craig Massey, RR 1, Box 205, Blue Springs, MO 64015.

Learnradio model AMR-1 receiver. Schematic and parts list needed. Navy Department model TN-5010/FRF502 tuner. Schematic needed. David Carlson, 3081 Ursula, Aurora, CO 80011.

Hallcrafters model S-120 shortwave radio. Need operation manual. Sean A. Devitt, 2237 Wharton Rd., Glenside, PA 19038.

Bell model T-337 tape recorder. Operation manual and information on parts. Don Lachey, 80 N. Frankfort St., Minster, OH 45865.

Webco model EP2302-1 tape recorder. Need oscillator coil.

Gerald K. Schultz, 4616 Buffalo Trail, Amarillo, TX 79109.

Accurate Instruments model 157 tube tester. Need operating instructions. Steve Rubin, 4903 N. Kimball, Chicago, IL 60625.

Hallcrafters model S-40 receiver. Schematic diagram needed. Nathan Meyers, Box 22265, San Diego, CA 92122.

Advent model 1000A video beam projector. **Honeywell** model 333 portable DVM. Schematic and alignment instructions needed. Wolfgang S. Wiedemann, 239 Harmon Circle, Keesler AFB, MS 39531.

Crosley model 7H3 broadcast shortwave receiver. Need schematic and operating manual. David Leupp, 222 W. Grove Ave., Apt. 3, Rantoul, IL 61866.

Hallcrafters model S38B receiver. Need instruction manual and schematics. Lonnie L. Hataway, Jr., 21-441D Citrus Ave., Elmendorf AFB, AK 99506.

Mercury model 201 tube tester. Need tube setup chart and schematic. Ken Layton, 194 1/2 E. State, Apt. 8C, Olympia, WA 98506.

Hallcrafters model HT40 transmitter. Need schematic and instruction manual. Vince Curtis, 226 Tremont Ave., Greensburg, PA 15601.

Trymetrix model 4000 P DVM and model 500A DVM plug-in. Need manual and schematic. Francis Grosz, 3620 Canal St., New Orleans, LA 70119.

Hammarlund model BC779 receiver. Operating manual, service manual, parts list and schematic. Mike Christodolou, 18 Lei Dr., Lexington Park, MD 20653.

Scott serial #1052 marine radio. Need service manual and schematic. Frank B. Hawley, 253 West Rock Ave., New Haven, CT 06515.

Stromberg-Carlson Co., Ltd., type 5788 oscilloscope. Need any information. John Greenland, Box 138, Kelligrews, Newfoundland, AOA 270.

Accurate Instrument Co., model 154 VOM. Need schematic. Lee W. Hannahs, 4544 Barden Rd., Coleman, MI 48618.

Hickok model 550X mutual conductance multi-tester. Tube chart and manual. Mike Galinski, 645 Lindsay St., St. Laurent, Quebec, Can. H4L 2R1.

Radio Shack model EC421 calculator. Need operation instructions. Leo E. Smith, Box 945, Veteran's Home, Yountville, CA 94599.

Teac model A-4010SU tape deck with model RA-40SU record amplifier. Schematic and service information. Norm Satterstrom, 212 W. Collen Dr., #207, Lombard, IL 60148.

Yaesu **Musen** type YO-100 monitor scope. Manual, schematic and source of information. A. C. Guimaraes, Cistema de Cima 47 Fafe, Portugal.

Friden model SW8 comptometer. Operating and service manual. **General Electric** model M8635A stereo receiver. Schematics, parts list and operating instructions. Todd Carter, 2671 Greentree Ct, Jenison, MI 49428.

Gonset model GR212 receiver. Need schematic and alignment instructions. Arthur D. Cox, 1507 Gannon Dr., Sacramento, CA 95825.

Sears model 5177, chassis #528, 62123 color TV. Need schematic. John Baldwin, 203 6th Av., N.E., Waseca, MN 56093.

Sun model 550 ignition analyzer oscilloscope. Need schematic and cables. D. Smith, 3561 Marian Dr., Trenton, NJ 48183.

IBM scanning monitor receiver. Need schematic and any other information. James Hall, Rt. 3, Box 281A, Staunton, VA 24401.

Eversonic model HA-23CB CB radio. Need schematic. Randy Stanley, 5317 Lawrence Dr., Wilmington, NC 28405.

Dumont model 304-H, serial #10416 oscilloscope. Operating instructions. John H. Carroll, 210 E. Lincoln Ave., McDowell, PA 15057.

Echo Fonk model 109-B echo chamber. Operation manual and schematic. **Philco** model 18 radio. Schematic and parts list needed. Nicholas I. Oshana Jr., 187 Morningside Dr., Bristol, CT 06010.

Elco model HF-20 pre-amplifier needed. W.S. Reynolds, 733 Plantation Circle, Roanoke, VA 24019.

TOWNE DUMPE-VISIT OUR NEWEST STORE@WOOLCO PLAZA MANCHESTER,N.H.

\$138.88 Brand-Name Speaker Kits pair. More in our free catalog.

Another kit fit for full sound repro: 3-way "Bookshelf" system, 10" rear-firing passive rad. 8" MR (W), 3 1/2" superhorn piezoT. Freq resp 30 Hz to 25 kHz, power 10/90 RMS Watts. Size: 19 1/2" H x 11 1/2" W x 7 1/2" D. List price over \$500/pair. Our price is \$138.88/pair. 9130224... 96lbs/pr

4-WAY SPEAKER SAVE UP TO 80%

119.88 pair BIG BRAND NAME

Super Cabinet, 8" woofer/mid-range passive radiator, 2 1/2" super horn, Piezo tweeters, terminals, grill cloth, wires, acoustic dampening material, hardware, & instructions etc. Freq. resp. is 30 Hz TO 25,000 Hz., 75 watts max. power. Sh. Wt. 98 Lbs. (3 Pkgs).

Use this great speaker system for big band speakers, monitor speakers, all around music speakers or with "DISCO" Systems. Don't Delay! These will go fast. Seconds, Nicks, Chips, Cab. is structurally sound... You finish & save. 9110123... \$119.88/pr. \$1,998.88/20 pr.

POWER SUPPLY KIT INPUT 115 VOLTS 16 HZ.

We supply all electrical and electronic parts, you supply labor & mechanical parts, tools, & case.

Battery Charger 12VDC, 20A, 20 Lbs. 7C70005... (20A)... \$19.50

Battery Charger 12VDC, 15A, 15 Lbs. 9C0089... (15A)... \$14.50

Ni-Cad Battery Charger Kit, Super Buy! Up to 35VDC, 500Ma. Sh. Wt. 5 Lbs. 7C70243... \$6.00

Logic P.S. Kit. 5V, 1A, Reg'd. \$6.00 7C70267

5 TO 24VDC Reg'd & adjustable, 5 amp. Sh. Wt. 15 Lbs. 6M160301... \$14.88

Use Your BA-MC or AE for telephone orders. No C.O.D.'s please.

Please add POSTAGE - 1/Ps or Page Post.

VISIT OUR CATALOG SHOWROOM 119 FOSTER ST. PEABODY

ALARM STUFF New PKG Stuff

- *Ult-Sonic Mot. Det. 8D30336 \$49.50
- *Touch Switch Al 8M10475 \$6.88
- *Touch Switch Al/Hom 8M10474 \$7.88
- *Al. Wireless Xmitter 8S20110 \$14.88
- *Al. Wireless Rec. 8S20111 \$14.88
- *" 6" Bell Rec. 9S20198 \$12.88
- *1 1/2' Light Sen. Sw. 7C70281 \$4.88
- *Patio Door Al. 8S20251 \$1.50
- *Buzzers 3,6,12,24 VDC \$1.25
- *Door/Window Grd. 8M10512 \$2.88
- *CB Alarm R8K30263 \$4.38
- *Elec. Bike Al. 7S70456 \$7.50

BITS & PIECES

- *Latching Sw. 15A 8F20204 \$2.88
- *Al. Bd. Latch 8K30267 \$2.88
- *Key Sw. (SPST) 9D0157 \$4.88
- *Key Sw. (SP3T) R7C70103 \$1.25
- *Elec. Bike Al. 7S70456 \$7.50

9" VIDEO MONITOR \$49.88

MOTOROLA COMPUTER Monitors-R. U.E., Runs off 12 VDC, .8A, Scans Vert. Rotate Yoke, scans Horiz. Sold as you chg. & save. Qty. Ltd. Motorola No. 69VP106-Q01. Size. 9w x 8 1/2d x 8 1/2h. w/data. Sh. Wt. 15lb. D9130269 \$49.88

COMPUTER SURPLUS

COMPUTER STUFF:

- *I/O Printer(Daisy W.)9320247 \$168.88
- *9" Vid. Mon.(Conrac) You repair & save Data supplied 91380154 \$38.88
- *33 ASR TTY 9320083 \$348.88
- *33 RO TTY 9320085 \$248.88
- *MD 70 Singer Pr. 932088 \$348.88
- *5" Muffin fan 8T0532 \$8.88
- *ASCII Keyboard cons. 8W0584 \$68.88
- *Domp. I/O Term. 6N860336 \$39.88
- *Viatron Stuff (Get FREE Catalog)
- *IBM NOVA Terminals \$748.88 & up
- *TTY Stuff \$28.88 & up
- *Cassette recorders \$48.88 & up
- *Card cages \$5.00 & up
- *Dual 5" Disp. Mon. 7N80252 \$29.88

Send orders to:

B&F ENTERPRISES Dept. P-8
119 Foster Street
Peabody, MA 01960
(617) 531-5774

WHERE SURPLUS REIGNS SUPREME

SEND FOR YOUR FREE CATALOG - THOUSANDS OF SURPLUS BARGAINS AVAILABLE FOR HOBBYIST & ENGINEER

For faster service USE ZIP CODE on all mail

Electronics Classified

REGULAR CLASSIFIED: COMMERCIAL RATE: For firms or individuals offering commercial products or services, \$2.50 per word. Minimum order \$37.50. **EXPAND-AD® CLASSIFIED RATE:** \$3.75 per word. Minimum order \$56.25. Frequency discount: 5% for 6 months; 10% for 12 months paid in advance. **PERSONAL RATE:** For individuals with a personal item to buy or sell, \$1.50 per word. No minimum! **DISPLAY CLASSIFIED:** 1" by 1 column (2-1/4" wide), \$300. 2" by 1 column, \$600.00. 3" by 1 column, \$900.00. Advertiser to supply film positives. For frequency rates, please inquire. **GENERAL INFORMATION:** Ad copy must be typewritten or clearly printed. Payment must accompany copy except when ads are to be billed on credit cards — American Express, Diners Club, Master Charge, VISA (supply expiration date) — or when ads are placed by accredited advertising agencies. First word in all ads set in caps. All copy subject to publisher's approval. All advertisers using Post Office Boxes in their addresses **MUST** supply publisher with permanent address and telephone number before ad can be run. Advertisements will not be published which advertise or promote the use of devices for the surreptitious interception of communications. Ads are not acknowledged. They will appear in first issue to go to press after closing date. Closing Date: 1st of the 2nd month preceding cover date (for example, March issue closes January 1st). Send order and remittance to Classified Advertising, **POPULAR ELECTRONICS**, One Park Avenue, New York, N.Y. 10016. For inquiries, contact Linda Lemberg at (212) 725-3924.

FOR SALE

FREE! Bargain Catalog—I.C.'s, LED's, readouts, fiber optics, calculators parts & kits, semiconductors, parts. Poly Paks, Box 942PE, Lynnfield, Mass. 01940.

GOVERNMENT and industrial surplus receivers, transmitters, snooper scopes, electronic parts, Picture Catalog 25 cents. Meshna, Nahant, Mass. 01908.

LOWEST Prices Electronic Parts. Confidential Catalog Free. KNAPP, 4750 98th St N., St. Petersburg, FL 33708.

ELECTRONIC PARTS, semiconductors, kits. FREE FLYER. Large catalog \$1.00 deposit. BIGELOW ELECTRONICS, Bluffton, Ohio 45817.

RADIO—T.V. Tubes—36 cents each. Send for free catalog. Cornell, 4213 University, San Diego, Calif. 92105.

AMATEUR SCIENTISTS, Electronics Experimenters, Science Fair Students . . . Construction plans — Complete, including drawings, schematics, parts list with prices and sources . . . Robot Man — Psychedelic shows — Lasers — Emotion/Lie Detector — Touch Tone Dial — Quadraphonic Adapter — Transistorized Ignition — Burglar Alarm — Sound Meter . . . over 60 items. Send \$1.00 (no stamps) for complete catalog. Technical Writers Group, Box 5994, University Station, Raleigh, N.C. 27650.

SOUND SYNTHESIZER KITS—Surf \$14.95, Wind \$14.95, Wind Chimes \$19.95, Musical Accessories, many more. Catalog free. PAIA Electronics, Box J14359, Oklahoma City, OK 73114.

HEAR POLICE / FIRE Dispatchers! Catalog shows exclusive directories of "confidential" channels, scanners. Send postage stamp. Communications, Box 56-PE, Commack, N.Y. 11725.

TELETYPE EQUIPMENT: Copy Military, Press, Weather, Amateur, Commercial Transmissions. Catalog \$1.00. **WEATHER MAP RECORDERS:** Copy Satellite Photographs, National-Local Weather Maps. Learn How! \$1.00. Atlantic Sales, 3730 Nautilus Ave., Brooklyn, NY 11224. Phone: (212) 372-0349.

WHOLESALE C.B., Scanners, Antennas, Catalog 25 cents. Crystals: Special cut, \$4.95, Monitor \$3.95. Send make, model, frequency. G. Enterprises, Box 461P, Clearfield, UT 84015.

BUILD AND SAVE TELEPHONES, TELEVISION, DETECTIVE, BROADCAST Electronics. We sell construction plans with an Engineering Service. Speakerphones, Answering Machines, Carphones, Phonevision, Dialers, Color TV Converters, VTR, Games, \$25 TV Camera, Electron Microscope, Special Effects Generator, Time Base Corrector, Chroma Key. Engineering Courses in Telephone, Integrated Circuits, Detective Electronics. **PLUS MUCH MORE.** NEW Super Hobby Catalog **PLUS** year's subscription to Electronic News Letter, \$1.00. Don Britton Enterprises, 6200 Wilshire Blvd., Los Angeles, Calif. 90048.

NAME BRAND TEST EQUIPMENT at discount prices. 72 page catalog free. Write: Dept. PE, North American Electronics, 1468 West 25th Street, Cleveland, OH 44113.

UNSCRAMBLERS for any scanner. Several models available. Free literature. Capri Electronics, 8753T Windom, St. Louis, MO 63114.

UNSCRAMBLER KIT. Tunes all scramble frequencies, may be built in most scanners, 2-3/4 x 2-1/4 x 1/2. \$19.95. Factory built Code-Breaker. \$29.95. Free Catalog: KRYSTAL KITS, Box 445, Bentonville, Ark. 72712. (501) 273-5340.


B&K Test Equipment. Free catalog. Free Shipping. Dinosaur discounts. Spacetrax-Ax, 948 Prospect, Elmhurst, IL 60126.

BUILD THE ARTISAN ELECTRONIC ORGAN . . . The 20th century successor to the classic pipe organ. Kits feature modular construction, with logic controlled stops and RAM Pre-Set Memory System. Be an ar-ti-san. Write for our free brochure. AOK Manufacturing, Inc., Box 445, Kenmore, WA 98028.

NAME BRAND Test Equipment. Up to 50% discount. Free catalog. Salen Electronics, Box 82, Skokie, Illinois 60077.

SpeakerCuts.

The absolute latest in advanced speaker technology. Wave Aperture™ Drivers, the Patented Nestroic Woofer System, raw speaker components selected for their excellence. Horns, crossovers, subwoofers, woofers, midranges, horn and dome tweeters. Over 30 in all. Build your own speaker system and we'll provide top quality speakers and design information. Send for **FREE** 48 page color catalog from the largest, most experienced speaker kit manufacturer in the world. **DON'T DELAY. Write today!**



Dept. APE, 735 N. Northlake Way
Seattle, Washington 98103

POLICE/FIRE SCANNERS, crystals, antennas, CBs, Radar Detectors. HPR, Box 19224, Denver, CO 80219.

CB RADIOS, VHF-UHF Scanners, Crystal, Antennas, Radar Detectors. Wholesale. Southland, Box 3591, Baytown, TX 77520.

UNSCRAMBLE CODED MESSAGES from Police, Fire and Medical Channels. Same day service. Satisfaction guaranteed. Don Nobles Electronics, Inc., Rt. 7, Box 265B, Hot Springs, Arkansas 71901. (501) 623-6027.

MONTHLY PICTURE FLYER. Quality Surplus Electronic parts. Low Prices. Star-Tronics, Box 683, McMinnville, OR 97128.

PRINTED CIRCUIT supplies, chemicals, tools, artwork, plating solutions. Major credit cards. Catalog \$1.00, refundable. CIRCOLEX, Box 198, Marcy, NY 13403.

RECONDITIONED TEST EQUIPMENT \$1.00 for catalog. WALTER'S TEST EQUIPMENT, 2697 Nickel, San Pablo, CA 94806, (415) 758-1050.

NEGATIVE ION GENERATORS AND ACCESSORIES. (Kits). Fascinating details—\$1.00. Golden Enterprises, Box 1282-PE, Glendale, Arizona 85311.

Super Powerful Wireless Mic
10 times more powerful than other mics
Transmits up to 1/2 mile on any FM radio.
Easy to assemble kit. 15V battery (not incl.)
Call (305) 725-1000 or send \$18.95 + \$1.00 shipping to USI Corp., P.O. Box PE-2052, Melbourne, FL 32901. COD's accepted.
For catalog of transmitters, voice scramblers and other specialty items, enclose \$2.00 to USI Corp.

\$18.95
Qty Disc Avail
to USI Corp

TRANSISTORS, IC's, RF-Power, for communications, TV, audio repairs, 25C756A - \$2.00, 25C1307 - \$2.15, 2N6084 - \$14.50, STK439 - \$8.75. Many more. Free catalog. B&D Enterprises, Box 32, Mt. Jewett, PA 16740. (814) 837-6820.

New Morse-A-Word Code Reader

IDEAL FOR BEGINNERS SOL'S AND AMATEURS CONNECTS TO YOUR RECEIVER SPEAKER FULL EIGHT CHARACTER READOUT ORDER NAME \$29.95 KIT \$109.95 SEND CHECK OR MONEY ORDER USE YOUR VISA OR MASTER CHARGE ADD \$3.50 FOR SHIPPING

Microcraft Corporation
P.O. Box 513, Thiensville, Wisconsin 53092

RECEIVE FREQUENCY ADAPTOR, converts your receiver to digital readout. Davis Electronics, 636 Sheridan, Tonawanda, NY 14150. 1-716/874-5848.

PRINTED CIRCUIT BOARDS, your artwork, 45¢ sq. in. single sided, 60¢ sq. in. double sided. Mail your order now, or send for free details. Digitronics, P.O. Box 2494, Toledo, OH 43606.

LOW COST ELECTRONIC PARTS!!! Send for **FREE** flyer. ALL ELECTRONICS CORP., 905 S. Vermont Ave., Dept. F, Los Angeles, CA 90006.

DB-100—ADJACENT CHANNEL FILTER—most incredible filter ever offered to civilian market. Replaces any .455 K.C.I.F. filter to increase selectivity up to 100 DB's. Works on any receiver, transceiver, etc., using .455 K.C.I.F. Free fact sheet, or send \$29.95. SSB Publications, Box 960, Hyannis, MA 02601.

SCANNERS: WHOLESALE PRICES! Bearcat 220 — \$329.95; Regency K500 — \$329.95; Bearcat 250 — \$279.95; plus 20 other models at similar discounts from the nation's scanner specialist. VISA/Mastercharge okay. Phone: (415) 573-1824. Free catalog. Write: Scanners Unlimited, 1326 El Camino Real, Belmont, California 94002.

ELECTRONIC TEST EQUIPMENT. Free catalog. E. French, PO Box 249, Aurora, IL 60507.

ROBOTS FOR SALE. Radio controlled for promotions, advertisement, etc. Send \$1.00 for information to: Connecticut Marketing, 70 Russell Avenue, Plainville, CT 06062.

LATEST AND BEST in electronic components, books and supplies. Write for big free catalogue. TRI-TEK, 7808 N 27 Ave., Phoenix, AZ 85021.

BARGAINS GALORE! Monthly swap sheet for radio collectors, hams, experimenters, etc. Send long SASE for sample. Electronics Trader, Box 2377, Argus, CA 93562.

AUDIO NOISE REDUCTION KIT — 318 SILENCER for tapes, records, FM. Free brochure. LOGICAL SYSTEMS, 3314 'H' St., Vancouver, Washington 98663.

PRINTED CIRCUIT BOARDS, double, single-sided. From schematic, sketch, finished artwork. We design computer interface prototypes. WEB Printed Circuits, P.O. Box 3851, Kingsport, Tenn. 37664.

ANTENNA ACCESSORIES CATALOG for Hams, CBers and Home TV innovators has application data. Send 15¢ stamp to: Dept. PE2, Unadilla/Reyco, Box 280, East Syracuse, NY 13057.

SATELLITE TV
GET 50 CHANNELS!

It's all true! No matter where you live receive movies, sports, pay television, sports from around the world! 24 hour programming! Crystal clear reception! For complete information, sources and design information send \$7.95.

SPACECOAST RESEARCH
Dept. D, P.O. Box 442, Altamonte Springs, FL 32701

New Technology!

DOLBY DECODER now available assembled or as kit. Comprehensive review. PAE Integrex, Box 747, Havertown, PA 19083.

TUBES

RADIO & T.V. Tubes—36 cents each. Send for free Catalog. Cornell, 4213 University, San Diego, Calif. 92105.

TUBES: "Oldies", Latest. Supplies, components, schematics. Catalog Free (stamp appreciated). Steinmetz, 7519-PE Maplewood, Hammond, Ind. 46324.

TUBES-RECEIVING, Industrial and Semiconductors Factory Boxed. Free price sheet including TV, Radio and audio parts list. Translephone, Inc., 1365 39th St., Brooklyn, New York 11218. Telephone: (212) 633-2800. Toll free: 800-221-5802.

RADIO AND TV TUBES 1938 to 1978 \$1.00 ea. PRELLER TV, Augusta, AR 72006. (501) 347-2281.

PLANS AND KITS

TOP QUALITY IMPORTED KITS, IC's, foreign transistors. Free catalog. International Electronics, Box 567, Williamsville, NY 14221.

ELECTRONICS KITS: For information, send self addressed stamped envelope. GI Kits, Box 2329, Garland, TX 75041.

AMAZING ELECTRONIC PRODUCTS

LASERS SUPER POWERED, RIFLE, PISTOL, POCKET - SEE IN DARK - PYRO-TECHNICAL, DE-BUGGING - UNCLAMBERS - GIANT TESLA - STUNWAND - TV DISRUPTER - ENERGY PRODUCING, SCIENTIFIC DETECTION, ELECTRIFYING, CHEMICAL, ULTRASONIC, CB, AERO, AUTO AND MECH DEVICES, HUNDREDS MORE - ALL NEW PLUS INFO UNLTD PARTS SERVICE.

INFORMATION unlimited

CATALOG \$1 Dept. E8, Box 716, Amherst, NH 03031

FREE KIT Catalog contains Test and Experimenter's Equipment. Dage Scientific Instruments, Box 1054P, Livermore, CA 94550.



TIGER 500 SIMPLI-KIT

FOR THE DO-IT-YOURSELF

NOW! a high quality CD ELECTRONIC IGNITION SYSTEM in kit form.

Contains all components and solder to build complete Solid-State Electronic CD Ignition System for your car. Assembly requires less than 3 hours.

- Increases MPG 15%
- Increases horsepower 15%
- Plugs and Points last 50,000 miles
- Eliminates 4 or 5 tune-ups
- Instant starting, any weather
- Dual system switch

Fits only 12 volt neg. ground...
Only \$26.95 postpaid

Tri-Star Corporation
P.O. Box 1727 Grand Junction, Colorado 81501

BUILD YOUR OWN SYMPHONY OF SOUND!

It's fun and easy—takes just minutes a day! Complete kits for organs, pianos, strings, rhythms, amplifiers, synthesizers. Also factory assembled. 104-page catalog \$2.00

WERSI

Wersi Electronics, Inc.
Dept. ZD, 1720 Hempstead Road
Lancaster, PA 17601

TV-OSCILLOSCOPE CONVERTER externally adapts TV into audio frequency oscilloscope. Info. \$1.00. Plans \$7.50, with P.C. \$15.00, complete kit \$60.00. Evolutionics, Box 855-J, San Rafael, CA 94902.

PRINTED CIRCUIT Boards from sketch or artwork. Kit projects. Free details. DANOCINTHS Inc., Box 261, Westland, MI 48185.

TELETYPEWRITER USERS: Unique solid state time delay relay. Reduces energy and maintenance costs. Information 50¢, Plans \$5.00, with P.C. \$10.00. KEITH RYAN, Box 3103-P, Ottawa, CANADA, K1P 6H7. U.S. Inquiries.

TESLA COIL — 40" SPARKS! Plans \$7.50. Information 75 cents. Huntington Electronics, Box 2009-P, Huntington, Conn. 06484.

TAPE — SLIDE, Synchronizer, multiprojector, lap-dissolve plans, \$5.50. Audiovisual group, \$8.50. Millers, 1896 Maywood, S. Euclid, OH 44121.

BUILD DIGITAL DIAL for AM Broadcast Receivers. Simple — Inexpensive — Accurate. Uses Standard components. Information/Schematic/Layout — \$3.95. W.M. Whitley, 5603 Lemonwood, Austin, Texas 78731.

UNIQUE DEVICES FOR STEREO, etc. Catalog \$1. Lusus, 31W251 Rte. 64, West Chicago, IL 60185.

WIRELESS FM MICROPHONE, electronic siren, 10 watt alarm. Kits \$5.25 each. Electrokit, Box 568, Milford, MA 01757.

SPEAKERPLANS — Build ANY size speakers without special tools, experience. FOOLPROOF, illustrated instructions, parts sources. 80% SAVINGS! Rush \$4. SPEAKERPLANS, 275 Main, Stirling, NJ 07980.

TELEPHONES & PARTS

TELEPHONES UNLIMITED, EQUIPMENT SUPPLIES. ALL TYPES, REGULAR, KEYED, MODULAR. FREE CATALOG. Call now toll free. (800) 824-7888. In California (800) 852-7777. Alaska-Hawaii (800) 824-7919. Ask for operator 738.

OMAK PHONE CENTER. All types of telephones — keyed, modular and decorator. Catalog \$1.00 (refundable). Box 38, Beardstown, IL 62618. (217) 323-3963.

ALARMS

QUALITY BURGLAR-FIRE ALARM EQUIPMENT at discount prices. Free Catalog! Steffens, Box 624K, Cranford, N.J. 07016.

Burglar • Fire • Smoke Alarm Catalog

• Billions of dollars lost annually due to lack of protective warning alarms.

FREE CATALOG Shows you how to protect your home, business and person. Wholesale prices. Do-it-yourself. Free engineering service.



Burdex Security Co.

Box 82802 PE-089 Lincoln, Ne. 68501

GUIDE TO CHOOSING AND INSTALLING AUTO BURGLAR ALARMS. Send \$6.95 to: Auto Securities, P.O. Box 22487, Honolulu, Hawaii 96822.

PROFESSIONAL Quality Alarm systems for your home. For free catalogue, write: EAC, Electronics Department, Box 7881A, Colorado Springs, CO 80933.

HIGH FIDELITY

DIAMOND NEEDLES and Stereo Cartridges at Discount prices for Shure, Pickering, Stanton, Empire, Grado and ADC. Send for free catalog. LYLE CARTRIDGES, Dept. P, Box 69, Kensington Station, Brooklyn, New York 11218. For Fast Service call Toll Free 800-221-0908.

LOWEST PRICES on stereo components. BOSE, SAE, DBX and more. Dynamic Sound, Box 168(B), Starkville, MS 39759. (601) 323-0750. 1 PM - 9 PM.

WANTED

GOLD, Silver, Platinum, Mercury, Tantalum wanted. Highest prices paid by refinery. Ores assayed. Free circular. Mercury Terminal, Norwood, MA 02062.

PERSONALS

MAKE FRIENDS WORLDWIDE through international correspondence, illustrated brochure free. Hermes-Verlag, Box 110660/Z, D-1000 Berlin 11, W. Germany.

INSTRUCTION

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D's. Free revealing details. Counseling, Box 317-PE08, Tustin, California 92680.

LEARN WHILE ASLEEP! HYPNOTIZE! Astonishing details, strange catalog free! Autosuggestion, Box 24-ZD, Olympia, Washington 98507.

INTENSIVE 5 week course for Broadcast Engineers. FCC First Class license. Student rooms at the school. Radio Engineering Inc., 61 N. Pineapple Ave., Sarasota, FL 33577.

1979 "TESTS - ANSWERS" for FCC First Class License. Plus - "Self Study Ability Test." Proven! \$9.95 Unconditional Moneyback Guarantee. Com-mand Productions, Box 26348-P, San Francisco, CA 94126.

RADIO BROADCASTING: Become DJ, engineer. Start your own station — investment/experience unnecessary! Receive free equipment, records. Free details. Broadcasting, Box 130-A8, Paradise, CA 95969.

FCC LICENSE over 1200 questions, answers, discussions, illustrations. 3rd, 2nd, 1st, phone, radar, broadcast, endorsements. \$14.95. SPECIFIC SKILLS INTERNATIONALE Inc., P.O. Box 1233, Cocoa, Florida 32922. Mastercharge/VISA.

UNIVERSITY DEGREES BY MAIL!! Bachelor's, Master's, Doctorates. Free Information. Careers, Department Education, Box 10068, Washington, DC 20018.

EARN HIGH SCHOOL DIPLOMA, spare time. College-recognized. Credits given for previous courses, job experience. Low tuition. Exams repeated free. Individual counseling. State registered. Cambridge Academy, Dept. PE-1, 409 E. Osceola, Stuart, Florida 33494. Toll-free 1-800-327-8103.

LOANS — Former bank executive explains how to obtain loans from banks, other lenders. \$3.00. Businessman's supplement \$2.00. Sylvan Press, P.O. Box 18212, San Jose, CA 95158.

GOVERNMENT SURPLUS

MANUALS for Govt Surplus radios, test sets, scopes. List 50 cents (coin). Books, 7218 Roanne Drive, Washington, D.C. 20021.

JEEPS—\$59.30!! — CARS—\$33.50!! — 200,000 ITEMS!! — GOVERNMENT SURPLUS — Most COMPREHENSIVE DIRECTORY AVAILABLE tells how, where to buy — YOUR AREA — \$2.00 — MONEYBACK GUARANTEE — Government Information Services, Department GE-80, Box 99249, San Francisco, California 94109.

GOVERNMENT SURPLUS. Buy your Area. How, where. Send \$2.00. SURPLUS HEADQUARTERS BUILDING, Box 30177-PE, Washington, D.C. 20014.

"GOVERNMENT SURPLUS DIRECTORY" Buy 500,000 items (including Jeeps) . . . low as 2¢ on dollar! Most complete information available — \$2.00 (guaranteed). Surplus Disposal, Box 19107-HH, Washington, DC 20036.

FOR INVENTORS

PATENT AND DEVELOP Your invention. Registered Patent Agent and Licensed Professional Engineer, Send for FREE PATENT INFORMATION every inventor should have. Richard L. Miller, P.E., 3612 Woolworth Building, New York, NY 10007. (212) 267-5252.

INVENTIONS WANTED

FREE CONSULTATION • NO IDEA TOO SMALL
Disclosure protection. Cash or royalties from manufacturers seeking new ideas. For free information on how to protect your ideas. Call or Write

American Inventors Corp.
59 Interstate Dr. Dept PE
West Springfield, MA 01089 (413) 737-5376
A Fee Based Service Company

UNPATENTED IDEAS AND INVENTIONS can be sent directly to companies as an external submission. If a company is interested, help with the drafting and filing of a patent application is usually given. Send \$3.00 for: procedure outline, external submission form copies, guide for corporation addresses and interests; to: Submissions Dept., P.O. Box 55, Rochester, MN 55901.

MR. INVENTOR: America's foremost development firm offers a complete service. For free details, write: Charles S. Prince Co., Inc., Empire State Building, Suite 3308-E, N.Y.C. 10001.

BUSINESS OPPORTUNITIES

ERASE DEBTS with little-known law—create wealth!! Details FREE—Blueprints, No. EE8, Box 900, Bronx, NY 10471.

I MADE \$40,000.00 Year by Mailorder! Helped others make money! Torrey, Box 318-NN, Ypsilanti, Michigan 48197.

NEW LUXURY CAR WITHOUT COST! Free Report. Codex-ZZ, Box 6073, Toledo, Ohio 43614. (419) 865-5657.

MECHANICALLY INCLINED individuals desiring ownership of Small Electronics Manufacturing Business — without investment. Write: **BUSINESSES**, 92-K2 Brighton 11th, Brooklyn, New York 11235.

MILLIONS in Mail!!! Free Secrets. Transworld-17, Box 6226, Toledo, OH 43614.

MECHANICALLY INCLINED INDIVIDUALS

Assemble electronic devices in your home. Investment, knowledge, or experience not necessary. Get started in spare time. Above average profits. \$300 - \$600/Wk possible. Sales handled by others. Write for free details.

ELECTRONIC DEVELOPMENT LAB

Drawer 1560 PE, Pinellas Park, FL 33565.

BEAT THE RACES! Free Booklet! "Unlimited Lifetime Income From Thoroughbreds-Harness". Elias, Box 47BB, Brooklyn, NY 11219.

EARN EXTRA MONEY — Homeworkers Needed Stuffing Envelopes! Free Details. Write: Jadeway, Box 186-ZD, Gaines, MI 48436.

FREE CATALOGS. Repair air conditioning, refrigeration. Tools, supplies, full instructions. Doolin, 2016 Canton, Dallas, Texas 75201.

\$1200.00 MONTHLY Correcting Pupils' Lessons!!! Start immediately. Free Report. Send self-addressed stamped envelope. Home, Box 98201-SJXR, San Diego, CA 92109.

QUALITY ELECTRONICS MANUFACTURER offering exclusive marketing areas to persons with dental/medical, electronics, and/or professional background. Dealerships for sales and installation of innovative electronic products. Unlimited growth with complete factory support. Send confidential resume to Scott Ritchie, EEC, 797 Industrial Court, Bloomfield Hills, Michigan 48013.

GET RICH SLOWLY! How to operate your own profitable service business. Years of information and experience condensed in one easy-to-understand guide. \$9.95. ESI, 4500 East Speedway #33, Tucson, Arizona 85712.

WIN AT FOOTBALL! We beat the points spread an incredible 70% last 11 years! CBS-TV called us No. 1 football prediction newsletter! Guaranteed winner! Free: game by game record last 4 years. Winners Sports, 5711-S 14th Ave., Brooklyn, NY 11219.

EARN \$1000 STUFFING 1000 ENVELOPES! Money back guaranteed. Details \$1.00. D. Fraser, 208 S. 4TH, DeSoto, MO 63020.

BORROW \$25,000 "OVERNIGHT." Any purpose. Keep indefinitely! Free Report! Success Research, Box 29263-GH, Indianapolis, Indiana 46229.

BECOME A CONSULTANT. Earn \$20-\$40/hr. being in business for yourself. For detailed information on starting or expanding your own engineering consulting business, write: Dr. S. Tomczak, ST&A, Dept. PO, Box 480530, Los Angeles, CA 90048.

EMPLOYMENT OPPORTUNITIES

ELECTRONICS/AVIONICS EMPLOYMENT OPPORTUNITIES. Report on jobs now open. Details FREE. Aviation Employment Information Service, Box 240E, Northport, New York 11768.

RADIO-TV JOBS . . . Stations hiring nationwide! Free details: "Job Leads", 1680-PG Vine, Hollywood, CA 90028.

ELECTRONICS INSTRUCTORS. Challenging career opportunity with advancement with fully accredited electronics schools. Prefer at least 4-5 years industry experience. Very satisfying environment working with young people. Send resume to: United Electronics Institute, 1201 E. Atlantic Blvd., Pompano Beach, Florida 33060. Or call: Mr. Gold 1-800-327-1110 for national placement. Equal Opportunity Employer.

DO-IT-YOURSELF

AUDIO/ANALOG/SYNTHESIS. Plans, parts, kits, etc. for the most exciting sound projects ever. Get on our mailing list, send 25¢ to: CFR Associates Inc., Newton, N.H. 03858.

COMPLETE LINE Security Systems for home, Business. Send self addressed, stamped envelope. Darbar, Box 1147E, San Diego, CA 92112.

ELECTRICAL: testers, books, tools, supplies. Do It Yourself, professional. Free 108 page catalog. Bluffton Products, Dept. A, Box 87, Bluffton, OH 45817.

REAL ESTATE

BIG . . . FREE . . . FALL CATALOG! Over 2,600 top values coast to coast!! UNITED FARM AGENCY, 612-EP, West 47th, Kansas City, MO 64112.

MICROCOMPUTERS

TRS-80 MICRO COMPUTERS by Radio Shack* at 15% discount! Also have software for business systems. Micro Management Systems, Cairo, GA 31728. (912) 377-7120.

RUBBER STAMPS

RUBBER STAMPS, BUSINESS CARDS. Many new products. Catalog. Jackson's, E-100, Brownsville Rd., Mt. Vernon, Ill. 62864.

BOOKS AND MAGAZINES

FREE book prophet Elijah coming before Christ. Wonderful bible evidence. MEGIDDO Mission. Dept. 64, 481 Thurston Rd., Rochester, N.Y. 14619.

POPULAR ELECTRONICS INDEXES For 1977 now available. Prepared in cooperation with the Editors of "P/E," this index contains hundreds of references to product tests, construction projects, circuit tips and theory and is an essential companion to your magazine collection. 1977 Edition, \$1.50 per copy. All editions from 1972 onward still available at the same price. Add \$.25 per order for postage and handling. \$.50 per copy, foreign orders. INDEX, 6195 Deer Path, Manassas, Va. 22110.

UNDERSTANDING CALCULATOR MATH

224 pages. \$3.95. Order #LCB 3321. Check or money order: Texas Instruments, P.O. Box 3640, M/S84 Dept. PE879, Dallas, Texas 75285. Add sales tax where applicable.



TEXAS INSTRUMENTS
INCORPORATED

"OWNER REPAIR OF AMATEUR RADIO EQUIPMENT" Book. \$7.95. K6RQ, 14910 LG Blvd., Los Gatos, CA 95030.

CB TECHNICIANS — now available — SSB Engineering Practice Manual. Most comprehensive book on how to modify and expand any CB radio for maximum performance and range. Includes the newest PLL radios. Free fact sheet or send \$14.95. SSB Publications, Box 960, Hyannis, MA 02601.

HYPNOTISM

FREE Hypnotism. Self-Hypnosis. Sleep Learning Catalog! Drawer H400, Ruidoso, New Mexico 88345.

MOTION PICTURE/VIDEO FILMS

VIDEO MOVIES: all ratings; Beta, VHS. Bought, Sold, Rented. VCR's, Blank tapes, Supplies: Cat. \$1.00 (deductible). (201) 572-1222. Devco, P.O. Box 593, Edison, NJ 08817.

DISCOUNT VIDEO TAPES. Adult movies. Free price list. VTR, Box 234, Herald, CA 95638. (209) 748-2616.

JUST OUT OF THIS WORLD! "Superman" (Christopher Reeves) S-8 color/sound; "Buck Rogers" (Gil Gerard) special effects space age movies. 200' S-8 Eastman color/mag snd, only \$29.95 ea; both \$57. "Superman" also avail in 4C3' S-8 col/snd format, \$48.95 ea special. Add \$1.25 ea postage. Spend Father's Day Gift Dollars — order Alfred Hitchcock's "Frenzy" — scenes from the big picture. "Incredible Shrinking Man" (Journey into the unknown). S-8 B/W 200' and \$17.95 ea + 90¢ ship. Other price selections: Abbott and Costello in Who's On First (baseball classic) 200' S-8 B/W snd, \$18.95; 100 footer, \$14.95. Stay at home & enjoy movies! Watch Walter Matthau in "Fail Safe" & Jimmy Stewart in "Mr. Smith Goes to Washington" 400' S-8 B/W snd only \$35.95 ea PPD. Summertime Music — Thoroughly Modern Millie; Sweet Charity; Jesus Christ Superstar, 400' color S-8 and features priced to sell out @ \$42.95 ea PPD. Limited offer while stock lasts. Mail order today! New Universal 64-pg glossy catalog, \$1.25. Columbia, Sportlite, Ring Classics, Universal order forms, 40¢ ea. **SPORTLITE FILMS**, Elect-8/79, Box 24-500, Speedway, IN 46224.

MISCELLANEOUS

MPG INCREASED! Bypass Pollution Devices easily. **REVERSIBLY!!** Free details — Posco GEE8, 453 W. 256, NYC 10471.

NEW CAR FREE YEARLY! Free information! Super-Car Publications, Box 28101-N, St. Louis, MO 63119.

GASOLINE MILEAGE INCREASED DRAMATICALLY! Simplified retuning methods. Details FREE! Technearing, Box 12191 PE, Norfolk, VA 23502.

Popular Electronics

ADVERTISERS INDEX

READER SERVICE NO.	ADVERTISER	PAGE NO.
3	Aaron-Gavin Instruments	68
4	Active Electronics Sales Corp.	81
6	Amelect, Inc.	67
7	American Antenna	Cover 4
8	Ancrona Corp.	92
2	AP Products, Inc.	Cover 3
10	B & F Enterprises	94
52	Cambridge International, Inc.	59
	Chaney Electronics	93
	Cleveland Institute of Electronics, Inc.	36, 37, 38, 39
1	Communications Electronics	76
12	Consumers Company	76
13	Continental Specialties Corp.	9
	Crutchfield Corp.	12
16	Delta Products, Inc.	79
17	Digi-Key Corp.	87
	Digital Research Corp.	92
18	Douglas Dunhill	46
15	DSI Instruments, Inc.	30
19	EICO	66
20	Electra Co.	2
21	Fluke	7
22	Fordham Radio Supply	91
23	Formula International	8
24	Fuji Photo Film USA, Inc.	15
25	General Engines Co.	93
26	Godbout Electronics, Bill	93
27	Grantham College of Engineering	66
5	Heath Co.	63, 64, 65
28	Illinois Audio	77
29	Integrated Circuits	82
30	International Components Corp.	90
31	J & R Music World	77
32	Jameco Electronics	88, 89
	JS & A National Sales Group	1
33	Jensen Tools and Alloys	22
34	Kedman Company	76
35	McIntosh Laboratory, Inc.	6
	Micro Computer Mart	73
37	Micro World	93
38	Mini Micro Mart	76
39	Netronics R & D Ltd.	75
40	Netronics R & D Ltd.	71
	NRI Schools	16, 17, 18, 19
41	Ohio Scientific Instrument	5
42	OK Machine & Tool Corp.	43
11	onComputing	13
43	PAIA Electronics, Inc.	71
44	PAL "Firestik" Antenna Corp.	74
45	Poly Paks	84
46	Quest Electronics	80
	Radio Shack	83
	Sabtronics International, Inc.	69
	Sharper Image, The	10, 11, 21
47	Shure Brothers Inc.	14
48	Solid State Sales	91
	Speakerlab, Inc.	74
	Synchro Sound	68
50	Tab Books	77
36	Timeglow Company	41
51	U.S. Marine Corp.	27, 28, 29

ELECTRONICS WORLD®

Personal Electronics News

GM deletes "standard" radios in a settlement of the auto sound antitrust suit filed against it in March by members of the Custom Automotive Sound Association (CASA). Under terms of the settlement, General Motors will offer the delete option on the standard radios of all of its recently introduced X-body cars. Moreover, GM will permit dealers to exchange a Delco radio in these cars for credit against purchase of any GM part. (Former policy restricted exchange credit only toward purchase of another Delco radio.) GM also agreed not to standardize Delco radios in any additional models through the end of the 1983 model year. Thereafter, if GM intends to extend radio standardization, it will furnish CASA with at least four months notice.

A home energy-saving system has been developed by William Lamb (No. Hollywood, CA), pioneer in the development of silicon solar cells. It consists of a lightweight panel of 36 cells that are capable of developing 16 volts to charge a 12-volt storage battery at a 1.5-ampere/hr rate. Enough power is available from a single panel system to operate a low-power 12" monochrome TV receiver. The glass surface of each cell is toughened and backed by a special chemical compound that makes it practically impervious to hammer blows and all kinds of weather. Virtually maintenance-free, the system costs nothing to operate. Also, its modular design permits quick expansion of the system at any time. Price of a 36-cell system is \$325.

Microwave-oven market growth could be hampered unless frequencies near 10 GHz are allocated for cooking, according to Litton Microwave Cooking. As a result, Litton will try to bypass a recent FCC ruling by taking its case to the World Administrative Radio Conference (WARC) to be held in Geneva in September. The FCC, currently considering a proposal for a common-carrier data network based in part on local 10-GHz radio facilities, said microwave-oven use in those bands is "incompatible with existing and planned services for both bands." Resolutions adopted at WARC will be submitted to participating governments for

approval. If the U.S. Senate approves WARC resolutions including the change Litton seeks, it would overturn the FCC ruling, since Senate approval would have treaty status.

A computer marathon record is claimed by a group of Holy Cross high-school students in San Antonio, TX. The 311 students who took part in 8½-day around-the-clock training sessions believe their accomplishment deserves mention in record books. Instructor Dennis Doose suggested the training marathon after students voluntarily began staying after class to use the school's TRS-80 microcomputer. Radio Shack, manufacturer of the TRS-80, agreed to lend the school 22 additional microcomputers for the event.

A talking Language Translator, utilizing speech synthesis and offering solid-state modules for various languages, was announced by Texas Instruments. Designed as an aid in communicating in a foreign country and for language students in learning to pronounce a foreign language, it is programmed with a vocabulary of words and phrases selected for everyday use. The translator has the ability to form thousands of spoken phrases by linking together its spoken vocabulary words. Each module will contain about 1000 words of which half will be spoken and displayed and half will be displayed only. Prices will be about \$250 for the Language Translator and \$50 for each language module.

The deaf can read TV dialog with a new device soon to be marketed by Sears, Roebuck and Co. Next year, ABC-TV, NBC-TV, and Public Service Broadcasting will be airing about 20 hours of programs with special encoding. When decoded, dialog will appear on-screen in caption form with the aid of the decoding device. Captioning information will not appear on the screen if no decoder is used. For the past eight years, the department of Health, Education and Welfare (HEW) has paid for the research that has culminated in the development of captioned programs.



CREATE!

You don't waste a second on "mechanics" with A P All-Circuit Evaluators.

You figure out the circuit you want, then plug it in for testing. You decide to improve your layout, and you make your moves as quickly as you think them up. There's just no faster or easier way to build and test

circuits and circuit ideas.

But just because breadboarding is now such a cinch, don't get the idea that you don't have electronic integrity. Our solderless plug-in tie points are made of a special non-corroding alloy. Use them as often as you like.

How many tie points do you need? Our smallest ACE has 728, our

largest has 3,648. And all of them accept all DIP sizes.

Everything is quality all the way. You can even see the difference in our harder, shinier plastic matrix.

See for yourself. Phone (toll-free) 800-321-9668 for the address of your nearby A P Products dealer. And ask for our complete A P catalog, The Faster and Easier Book.



**AP PRODUCTS
INCORPORATED**

Box 110 • 72 Corwin Drive
Painesville, Ohio 44077
Tel. 216/354-2101
TWX: 810-425-2250

Faster and Easier is what we're all about.

THE K40 SPEECH PROCESSOR

The K40
Speech Processor.
So unique it's patented.
So good its guaranteed
to out-perform any
microphone on any radio.

CLIPS ANYWHERE WITHOUT A CLIP!

Molded four-pole internal magnet clamps instantly to any steel surface. Steering column, metal dash, roof top, or the side of your CB radio. No groping for your mounting clip.

PROCESSES SPEECH WITH A COMPUTER CIRCUIT!

It's its own computer—it automatically monitors your speech and adjusts it in micro-second increments pumping so much db gain into your speech that you get 400% more power than a standard mike.

Double Guarantee

GUARANTEE I:

The K40 Speech Processor is guaranteed to outperform any microphone it replaces or return it for a complete and full refund within 7 days from the K40 Dealer that installed and tuned it.

GUARANTEE II:

Unconditionally guaranteed for 12 months. Guaranteed against cracking, chipping, or rusting. Guaranteed against mechanical failure. Guaranteed against electrical failure. No exclusions. No gimmicks. For a full 12 months.

SOUND SENSITIVE 2 INCHES OR 2 FEET!

A microphone so sensitive it will select your voice and process your speech no matter how close or far you are from the microphone.

TWO MICS WITH ONE SWITCH!

Switch up for a high-pitched transmission for cutting congested city traffic. Switch down for a mellow base in open, uncluttered rural areas.

NOISE CANCELLING

Pull the Processor directly to your mouth and speak directly into the mic. The Processor adjusts to your voice—and blanks out all the cab noise while you're speaking. Automatically.

FRESH CHARGE WITH NO BATTERIES!

Patented electronic storage system recharges while you listen to the radio. It provides a fresh electrical charge every time you squeeze the trigger. You never replace batteries.

\$42.50*

American Antenna Eign, II 60120

*suggested retail

CIRCLE 30 ON FREE INFORMATION CARD

SOLD AND SERVICED EXCLUSIVELY BY 3,500 REGISTERED K40 DEALERS THROUGHOUT THE U.S. AND CANADA